

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP04/053688

International filing date: 23 December 2004 (23.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 10/972,431
Filing date: 26 October 2004 (26.10.2004)

Date of receipt at the International Bureau: 28 January 2005 (28.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

20 JAN 2005

PA 1266360



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office


January 03, 2005


**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.**

APPLICATION NUMBER: 10/972,431

FILING DATE: October 26, 2004

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**

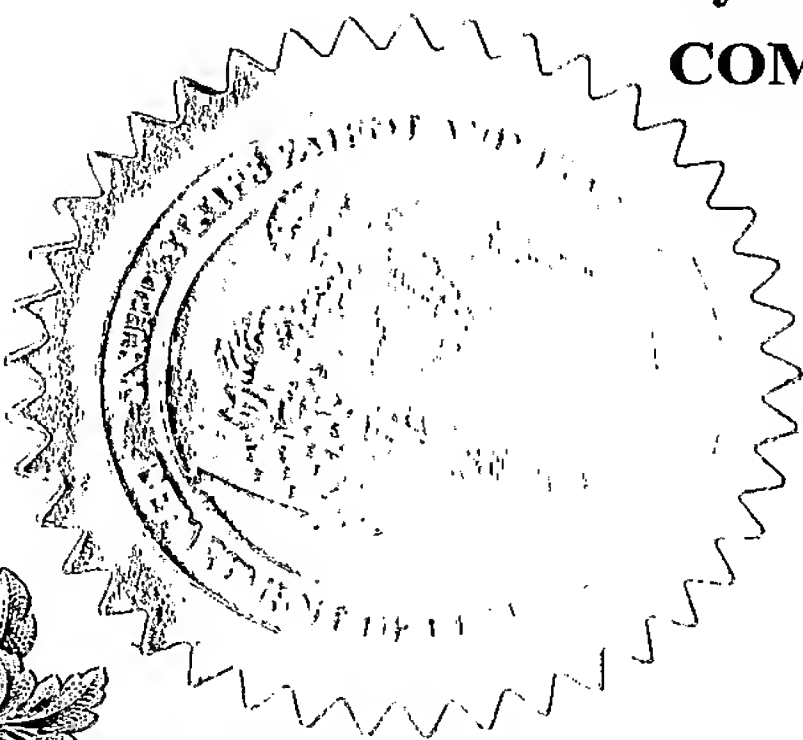


TRUDIE WALLACE
Certifying Officer

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new non-provisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P25760

Total Pages

Inventor(s) or Application Identifier

Jeffrey HERMAN, Thomas Thoroe SCHERB, Luis Carlos SILVA and Hubert WALKENHAUS

Title: PRESS SECTION AND PERMEABLE BELT IN PAPER MACHINE

ADDRESS TO:

Mail Stop Patent Application
Commissioner for Patents
U.S. Patent and Trademark Office
220 20th Street S.
Customer Window, Mail Stop
Crystal Plaza Two, Lobby, Room 1B03
Arlington, VA 22202

APPLICATION ELEMENTS

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☐ Applicant claims small entity status
See 37 CFR 1.27
a. ☐ Small Entity Statement(s)
3. ☒ Specification [Total Pages: 69]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 USC 113) [Total Sheets: 17]
5. ☒ Oath or Declaration [Total Pages: 4]
 - a. ☐ Newly executed (original or copy) ☒ Unexecuted
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 21 completed)
[Note Box 6 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Incorporation By Reference (useable if Box 5b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 5b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
7. ☐ Application Data Sheet. See 37 CFR 1.76
8. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)

ACCOMPANYING APPLICATION PARTS


9. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ Paper
 - c. ☐ Statements verifying identity of above copies
10. ☐ Assignment Papers (cover sheet & document(s))
11. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
12. ☐ English Translation Document (if applicable)
13. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
14. ☐ Preliminary Amendment
15. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
16. ☒ Figure of Drawing to be published: 1
17. ☐ Foreign priority claimed
 - a. ☐ Claim of Priority
 - b. ☐ Certified Copy of Priority Document(s)
18. ☐ Non-publication Request under 35 USC 122(b)(2)(B)(i).
Applicant must attach form PTO/SB/35 or its equivalent.
19. ☒ Assignee: Voith Fabrics Patent GmbH of Heidenheim, Germany
20. ☒ Other: Cover Letter Filed Under 37 CFR 1.53(b) & (f)

21. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in the first sentence of the specification following the title, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____, filed _____.

Prior application information: Examiner: _____ Group Art Unit: _____

Address all future correspondence to Customer No. 7055 at the present address of:

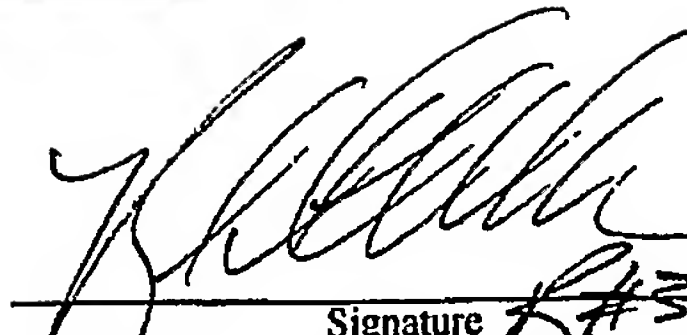GREENBLUM & BERNSTEIN, P.L.C.
1950 Roland Clarke Place
Reston, VA 20191
(703) 716-1191Oct. 26, 2004
Date
Signature Neil F. Greenblum
Neil F. Greenblum, Reg. No. 28,394
Typed or Printed Name

13281
U.S. PTO

FEE TRANSMITTAL

Complete if Known

FEE TRANSMITTAL		Application Number		Not Yet Assigned
		Filing Date		Concurrently Herewith
		First Name Inventor		Jeffrey HERMAN et al.
		Group Art Unit		Unassigned
		Examiner Name		Unassigned
TOTAL AMOUNT OF PAYMENT		(\$)		3,730.00
		Attorney Docket Number		P25760

METHOD OF PAYMENT (check one)

1. ☒ The U.S. Patent and Trademark Office is hereby authorized to charged indicated fees and credit any overpayments to:

Deposit Account No.: 19-0089

Deposit Account Name: GREENBLUM & BERNSTEIN, P.L.C.

- ☒ Charge any additional fee required under 37 CFR 1.16 and 1.17, including any required extension of time fees in any concurrent or future reply requiring a petition for extension of time for its timely submission (37 CFR 1.136(a)(3))
- ☐ Charge the Issue Fee set in 37 CFR 1.18 at the mailing of the Notice of Allowance, 37 CFR 1.311 (b)
- ☐ Applicant claims Small Entity Status, See 37 CFR 1.27

2. ☒ Payment Enclosed;
☒ Check ☐ Credit Card ☐ Money Order ☐ Other

FEE CALCULATION (fees effective 10/01/04)

1. FILING FEE

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
1001	790	2001	395	Utility filing fee	790.00
1002	350	2002	175	Design filing fee	
1003	550	2003	275	Plant filing fee	
1004	790	2004	395	Reissue filing fee	
1005	160	2005	80	Provisional filing fee	

SUBTOTAL (1) (\$) 790.00

2. CLAIMS

	Extra	Fee from below	Fee Paid
Total Claims: 154	-20= 134	x 18	= 2,412.00
Independent Claims: 9	-3= 6	x 88	= 528.00
Multiple Dependent Claims: 0	x 290	= 0	

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
1202	18	2202	9	Claims in excess of 20
1201	88	2201	44	Independent claims in excess of 3
1203	300	2203	150	Multiple dependent claims
1204	88	2204	44	Reissue independent claims over original patent
1205	18	2205	9	Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 2,940.00

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Fee Code	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
1051	130	2051	65 Surcharge - late filing fee or oath	
1052	50	252	25 Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130 Non-English specification	
1812	2,520	1812	2,520 For filing a request for re-examination	
1804	920*	1804	920* Requesting publication of SIR Prior to Examiner action	
1805	1,840*	1805	1,840* Requesting publication of SIR after Examiner action	
1251	110	2251	55 Extension for response within 1 st month	
1252	430	2252	215 Extension for response within 2 nd month	
1253	980	2253	490 Extension for response within 3 rd month	
1254	1,530	2254	765 Extension for response within 4 th month	
1255	2,080	2255	1,040 Extension for response within 5 th month	
1401	340	2401	170 Notice of Appeal	
1402	340	2402	170 Filing a brief in support of an appeal	
1403	300	2403	150 Request for oral hearing	
1451	1,510	1451	1,510 Petition to institute a public use proceeding	
1452	110	2452	55 Petition to revive unavoidably abandoned application	
1453	1,370	2453	685 Petition to revive unintentionally abandoned application	
1501	1,370	2501	685 Utility issue fee (or reissue)	
1502	490	2502	245 Design issue fee	
1503	660	2503	330 Plant issue fee	
1460	130	1460	130 Petitions to the Commissioner	
1807	50	1807	50 Petitions related to provisional applications	
1806	180	1806	180 Submission of IDS	
8021	40	8021	40 Recording each patent assignment per property (times number of properties)	
1809	790	2809	395 Filing a submission after final rejection (37 CFR 1.129(a))	
1810	790	2810	395 For each additional invention to be examined (37 CFR 1.129(b))	
1801	790	2801	395 Request for Continued Examination (RCE)	
1802	900	1802	900 Request for expedited examination of a design application	

Other fee (specify):

Other fee (specify):

SUBTOTAL (3) (\$) 0

*Reduced by Basic Filing Fee paid

SUBMITTED BY

Complete (if applicable)

Typed or Printed Name	Neil P. Greenblum	Reg. Number	28,394
Signature	<i>Neil P. Greenblum</i>	Deposit Account User ID	
Date	Oct. 26, 2004		

P25760.P02

P25760.P03

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Jeffrey HERMAN et al.

Appl. No: : Not Yet Assigned

Filed : Concurrently Herewith

For : PRESS SECTION AND PERMEABLE BELT IN A PAPER MACHINE

**COVER LETTER ACCOMPANYING U.S. PATENT APPLICATION
FILED UNDER 37 C.F.R. 1.53(b) AND 1.53(f)**

Commissioner for Patents
U.S. Patent and Trademark Office
220 20th Street S.
Customer Window, Mail Stop _____
Crystal Plaza Two, Lobby, Room 1B03
Arlington, VA 22202

Sir:

Enclosed is a new patent application for filing in the U.S. Patent and Trademark Office under 37 C.F.R. 1.53(b) and 1.53(f) in which the Declaration and Power of Attorney attached hereto are in unexecuted form. A properly executed Declaration and Power of Attorney will be filed within the time period set forth in the Notice to File Missing Parts of Application, unless such time period has been extended by the filing of a petition accompanied by the extension fee under the provisions of 37 C.F.R. 1.136(a).

Related to the above, this application should be associated with Customer Number 7055, which includes the present correspondence address as follows:

GREENBLUM & BERNSTEIN P.L.C.
1950 Roland Clarke Place
Reston, VA 20191


.P25760.P03

The above-identified application includes:

- 69 pages of specification with abstract;
- 17 sheets of drawings with 29 figures;
- 154 total claims with 9 independent;
- an unexecuted Declaration and Power of Attorney.

If there are any questions, please contact the undersigned at the below-listed telephone number.

Respectfully submitted,
Jeffrey HERMAN et al.

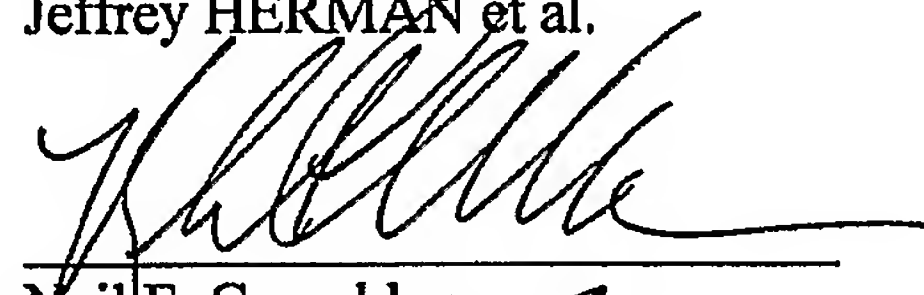

Neil F. Greenblum

Reg. No. 28,394

R#35,013

October 26, 2004
GREENBLUM & BERNSTEIN, P.L.C.
1950 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

TITLE OF THE INVENTION

PRESS SECTION AND PERMEABLE BELT IN A PAPER MACHINE

INVENTORS

Jeffrey HERMAN

Thomas Thoröe SCHERB

Luiz Carlos SILVA

Hubert WALKENHAUS

P25760.S04

PRESS SECTION AND PERMEABLE BELT IN A PAPER MACHINE

BACKGROUND OF THE INVENTION

1. Field of the invention.

[0001] The present invention relates to a paper machine, and, more particularly, to a permeable belt used in a belt press in a paper machine.

2. Description of the related art.

[0002] In a wet pressing operation, a fibrous web sheet is compressed at a press nip to the point where hydraulic pressure drives water out of the fibrous web. It has been recognized that conventional wet pressing methods are inefficient in that only a small portion of a roll's circumference is used to process the paper web. To overcome this limitation, some attempts have been made to adapt a solid impermeable belt to an extended nip for pressing the paper web and dewater the paper web. A problem with such an approach is that the impermeable belt prevents the flow of a drying fluid, such as air through the paper web. Extended nip press (ENP) belts are used throughout the paper industry as a way of increasing the actual pressing dwell time in a press nip. A shoe press is the apparatus that provides the ability of the ENP belt to have pressure applied therethrough, by having a stationary shoe that is configured to the curvature of the hard surface being pressed, for example, a solid press roll. In this way, the nip can be extended 120 mm for tissue, and up to 250 mm for flap papers beyond the limit of the contact between the press rolls themselves. An ENP belt serves as a roll cover on the shoe press. This flexible belt is lubricated by an oil shower on the inside to prevent frictional damage. The belt and shoe press are non-permeable members, and dewatering of the fibrous web is accomplished almost exclusively by the mechanical pressing thereof.

[0003] WO 03/062528 (whose disclosure is hereby expressly incorporated by reference in its entirety), for example, discloses a method of making a three dimensional surface structured web wherein the web exhibits improved caliper and absorbency. This

P25760.S04

document discusses the need to improve dewatering with a specially designed advanced dewatering system. The system uses a Belt Press which applies a load to the back side of the structured fabric during dewatering. The belt and the structured fabric are permeable. The belt can be a spiral link fabric and can be a permeable ENP belt in order to promote vacuum and pressing dewatering simultaneously. The nip can be extended well beyond the shoe press apparatus. However, such a system with the ENP belt has disadvantages, such as a limited open area.

[0004] It is also known in the prior art to utilize a through air drying process (TAD) for drying webs, especially tissue webs. Huge TAD-cylinders are necessary, however, and as well as a complex air supply and heating system. This system also requires a high operating expense to reach the necessary dryness of the web before it is transferred to a Yankee Cylinder, which drying cylinder dries the web to its end dryness of approximately 97%. On the Yankee surface, also the creping takes place through a creping doctor.

[0005] The machinery of the TAD system is very expensive and costs roughly double that of a conventional tissue machine. Also, the operational costs are high, because with the TAD process it is necessary to dry the web to a higher dryness level than it would be appropriate with the through air system in respect of the drying efficiency. The reason is the poor CD moisture profile produced by the TAD system at low dryness level. The moisture CD profile is only acceptable at high dryness levels up to 60%. At over 30%, the impingement drying by the hood of the Yankee is much more efficient.

[0006] The max web quality of a conventional tissue manufacturing process are as follows: the bulk of the produced tissue web is less than 9 cm³/g. The water holding capacity (measured by the basket method) of the produced tissue web is less than 9 (g H₂O / g fiber).

[0007] The advantage of the TAD system, however, results in a very high web quality especially with regard to high bulk, water holding capacity.

[0008] What is needed in the art is a belt, which provides enhanced dewatering of a

P25760.S04

continuous web.

SUMMARY OF THE INVENTION

[0009] Rather than relying on a mechanical shoe for pressing, the invention allows for the use a permeable belt as the pressing element. The belt is tensioned against a suction roll so as to form a Belt Press. This allows for a much longer press nip, e.g., ten times longer than a shoe press and twenty times longer than a conventional press, which results in much lower peak pressures, i.e., 1 bar instead of 30 bar for a conventional press and 15 bar for a shoe press, all for tissue. It also has the desired advantage of allowing air flow through the web, and into the press nip itself, which is not the case with typical Shoe Presses or a conventional press like the suction press roll against a solid Yankee dryer. The preferred permeable belt is a spiral link fabric.

[0010] There is a limit on vacuum dewatering (approximately 25% solids on a TAD fabric and 30% on a dewatering fabric) and the secret to reaching 35% or more in solids with this concept while maintaining TAD like quality, is to use a very long press nip formed by a permeable belt. This can be 10 times longer than a shoe press and 20 times longer than a conventional press. The pick pressure should also be very low, i.e., 20 times lower than a shoe press and 40 times lower than a conventional press. It is also very important to provide air flow through the nip. The efficiency of the arrangement of the invention is very high because it utilizes a very long nip combined with air flow through the nip. This is superior to a shoe press arrangement or to an arrangement which uses a suction press roll against a Yankee dryer wherein there is no air flow through the nip. The permeable belt can be pressed over a hard structured fabric (e.g., a TAD fabric) and over a soft, thick and resilient dewatering fabric while the paper sheet is arranged therebetween. This sandwich arrangement of the fabrics is important. The invention also takes advantage of the fact that the mass of fibers remain protected within the body (valleys) of the structured fabric and there is only a slightly pressing which occurs between the prominent points of the structured

P25760.S04

fabric (valleys). These valleys are not too deep so as to avoid deforming the fibers of the sheet plastically and to avoid negatively impacting the quality of the paper sheet, but not so shallow so as to take-up the excess water out of the mass of fibers. Of course, this is dependent on the softness, compressibility and resilience of the dewatering fabric.

[0011] The present invention also provides for a specially designed permeable ENP belt which can be used on a Belt Press in an advanced dewatering system or in an arrangement wherein the web is formed over a structured fabric. The permeable ENP belt can also be used in a No Press / Low press Tissue Flex process.

[0012] The present invention also provides a high strength permeable press belt with open areas and contact areas on a side of the belt.

[0013] The invention comprises, in one form thereof, a belt press including a roll having an exterior surface and a permeable belt having a side in pressing contact over a portion of the exterior surface of the roll. The permeable belt has a tension of at least approximately 30 KN/m applied thereto. The side of the permeable belt has an open area of at least approximately 25%, and a contact area of at least approximately 10%, and preferably approximately 50% open area and approximately 50% contact area, wherein the open area comprises a total area which is encompassed by the openings and grooves (i.e., that portion of the surface which is not designed to compress the web to same extent as the contact areas) and wherein the contact area is defined by the land areas of the surface of the belt, i.e., the total area of the surface of the belt between the openings and/or the grooves. With an ENP belt, it is not possible to use a 50% open area and a 50% contact area. On the other hand, this is possible with, e.g., a link fabric.

[0014] An advantage of the present invention is that it allows substantial airflow therethrough to reach the fibrous web for the removal of water by way of a vacuum, particularly during a pressing operation.

[0015] Another advantage is that the permeable belt allows a significant tension to be

P25760.S04

applied thereto.

[0016] Yet another advantage is that the permeable belt has substantial open areas adjacent to contact areas along one side of the belt.

[0017] Still yet another advantage of the present invention is that the permeable belt is capable of applying a line force over an extremely long nip, thereby ensuring a long dwell time in which pressure is applied against the web as compared to a standard shoe press.

[0018] The invention also provides for a belt press for a paper machine, wherein the belt press comprises a roll comprising an exterior surface. A permeable belt comprises a first side and is guided over a portion of the exterior surface of the roll. The permeable belt has a tension of at least approximately 30 KN/m. The first side has an open area of at least approximately 25% a contact area of at least approximately 10%.

[0019] The first side may face the exterior surface and the permeable belt may exert a pressing force on the roll. The permeable belt may comprise through openings. The permeable belt may comprise through openings arranged in a generally regular symmetrical pattern. The permeable belt may comprises generally parallel rows of through openings, whereby the rows are oriented along a machine direction. The permeable belt may exert a pressing force on the roll in the range of between approximately 30 KPa and approximately 300 KPa (approximately 0.3 bar to approximately 1.5 bar and preferably approximately 0.07 to approximately 1 bar). The permeable belt may comprise through openings and a plurality of grooves, each groove intersecting a different set of through openings. The first side may face the exterior surface and the permeable belt may exert a pressing force on the roll. The plurality of grooves may be arranged on the first side. Each of the plurality of grooves may comprise a width, and each of the through openings may comprise a diameter, and wherein the diameter is greater than the width.

[0020] The tension of the belt is greater than approximately 30 KN/m, and preferably 50 KN/m. The roll may comprise a vacuum roll. The roll may comprise a vacuum roll

P25760.S04

having an interior circumferential portion. The vacuum roll may comprise at least one vacuum zone arranged within said interior circumferential portion. The roll may comprise a vacuum roll having a suction zone. The suction zone may comprise a circumferential length of between approximately 200 mm and approximately 2500 mm. The circumferential length may be in the range of between approximately 800 mm and approximately 1800 mm. The circumferential length may be in the range of between approximately 1200 mm and approximately 1600 mm. The permeable belt may comprise at least one of a polyurethane extended nip belt or a spiral link fabric. The permeable belt may comprise a polyurethane extended nip belt which includes a plurality of reinforcing yarns embedded therein. The plurality of reinforcing yarns may comprise a plurality of machine direction yarns and a plurality of cross direction yarns. The permeable belt may comprise a polyurethane extended nip belt having a plurality of reinforcing yarns embedded therein, said plurality of reinforcing yarns being woven in a spiral link manner. The permeable belt may comprise a spiral link fabric (which importantly produces good results) or two or more spiral link fabrics.

[0021] The belt press may further comprise a first fabric and a second fabric traveling between the permeable belt and the roll. The first fabric has a first side and a second side. The first side of the first fabric is in at least partial contact with the exterior surface of the roll. The second side of the first fabric is in at least partial contact with a first side of a fibrous web. The second fabric has a first side and a second side. The first side of the second fabric is in at least partial contact with the first side of the permeable belt. The second side of the second fabric is in at least partial contact with a second side of the fibrous web. It is also possible to have a second permeable belt on top of the first fabric

[0022] The first fabric may comprise a permeable dewatering belt. The second fabric may comprise a structured fabric. The fibrous web may comprise a tissue web or hygiene web. The invention also provides for a fibrous material drying arrangement comprising an endlessly circulating permeable extended nip press (ENP) belt guided over a roll. The ENP

P25760.S04

belt is subjected to a tension of at least approximately 30 KN/m. The ENP belt comprises a side having an open area of at least approximately 25% and a contact area of at least approximately 10%.

[0023] The invention also provides for a permeable extended nip press (ENP) belt which is capable of being subjected to a tension of at least approximately 30 KN/m, wherein the permeable ENP belt comprises at least one side comprising an open area of at least approximately 25% and a contact area of at least approximately 10%.

[0024] The open area may be defined by through openings and the contact area is defined by a planar surface. The open area may be defined by through openings and the contact area is defined by a planar surface without openings, recesses, or grooves. The open area may be defined by through openings and grooves, and the contact area is defined by a planar surface without openings, recesses, or grooves. The open area may be between approximately 15% and approximately 50%, and the contact area may be between approximately 50% and approximately 85%. The open area may be between approximately 30% and approximately 85%, and the contact area may be between approximately 15% and approximately 70%. The open area may be between approximately 45% and approximately 85%, and the contact area may be between approximately 15% and approximately 55%. The open area may be between approximately 50% and approximately 65%, and the contact area may be between approximately 35% and approximately 50%. The permeable ENP belt may comprise a spiral link fabric. The open area may be between approximately 10% and approximately 40%, and the contact area is between approximately 60% and approximately 90%. The permeable ENP belt may comprise through openings arranged in a generally symmetrical pattern. The permeable ENP belt may comprise through openings arranged in generally parallel rows relative to a machine direction. The permeable ENP belt may comprise an endless circulating belt.

[0025] The permeable ENP belt may comprise through openings and the at least one

P25760.S04

side of the permeable ENP belt may comprise a plurality of grooves, each of the plurality of grooves intersects a different set of through hole. Each of the plurality of grooves may comprise a width, and each of the through openings may comprise a diameter, and wherein the diameter is greater than the width. Each of the plurality of grooves extend into the permeable ENP belt by an amount which is less than a thickness of the permeable belt.

[0026] The tension may be greater than approximately 30 KN/m and is preferably greater than approximately 50 KN/m, or greater than approximately 60 KN/m, or greater than approximately 80 KN/m. The permeable ENP belt may comprise a flexible reinforced polyurethane member. The permeable ENP belt may comprise a flexible spiral link fabric. The permeable ENP belt may comprise a flexible polyurethane member having a plurality of reinforcing yarns embedded therein. The plurality of reinforcing yarns may comprise a plurality of machine direction yarns and a plurality of cross direction yarns. The permeable ENP belt may comprise a flexible polyurethane material and a plurality of reinforcing yarns embedded therein, said plurality of reinforcing yarns being woven in a spiral link manner.

[0027] The invention also provides for a method of subjecting a fibrous web to pressing in a paper machine, wherein the method comprises applying pressure against a contact area of the fibrous web with a portion of a permeable belt, wherein the contact area is at least approximately 10% of an area of said portion and moving a fluid through an open area of said permeable belt and through the fibrous web, wherein said open area is at least approximately 25% of said portion, wherein, during the applying and the moving, said permeable belt has a tension of at least approximately 30 KN/m.

[0028] The contact area of the fibrous web may comprise areas which are pressed more by the portion than non-contact areas of the fibrous web. The portion of the permeable belt may comprise a generally planar surface which includes no openings, recesses, or grooves and which is guided over a roll. The fluid may comprises air. The open area of the permeable belt may comprise through openings and grooves. The tension may be greater

P25760.S04

than approximately 50 KN/m.

[0029] The method may further comprise rotating a roll in a machine direction, wherein said permeable belt moves in concert with and is guided over or by said roll. The permeable belt may comprise a plurality of grooves and through openings, each of said plurality of grooves being arranged on a side of the permeable belt and intersecting with a different set of through openings. The applying and the moving may occur for a dwell time which is sufficient to produce a fibrous web solids level in the range of between approximately 25% and approximately 55%. Preferably, the solids level may be greater than approximately 30%, and most preferably it is greater than approximately 40%. These solids levels may be obtained whether the permeable belt is used on a belt press or on a No Press / Low Press arrangement. The permeable belt may comprises a spiral link fabric.

[0030] The invention also provides for a method of pressing a fibrous web in a paper machine, wherein the method comprises applying a first pressure against first portions of the fibrous web with a permeable belt and a second greater pressure against second portions of the fibrous web with a pressing portion of the permeable belt, wherein an area of the second portions is at least approximately 25% of an area of the first portions and moving air through open portions of said permeable belt, wherein an area of the open portions is at least approximately 25% of the pressing portion of the permeable belt which applies the first and second pressures, wherein, during the applying and the moving, the permeable belt has a tension of at least approximately 30 KN/m.

[0031] The tension may be greater than approximately 50 KN/m or may be greater than approximately 60 KN/m or may be greater than approximately 80 KN/m. The method may further comprise rotating a roll in a machine direction, said permeable belt moving in concert with said roll. The area of the open portions may be at least approximately 50%. The area of the open portions may be at least approximately 70%. The second greater pressure may be in the range of between approximately 30 KPa and approximately 150 KPa.

P25760.S04

The moving and the applying may occur substantially simultaneously.

[0032] The method may further comprise moving the air through the fibrous web for a dwell time which is sufficient to produce a fibrous web solids in the range of between approximately 25% and approximately 55%. The dwell time may be equal to or greater than approximately 40 ms and is preferably equal to or greater than approximately 50 ms. Air flow can be approximately 150 m³/min per meter machine width.

[0033] The invention also provides for a method of drying a fibrous web in a belt press which includes a roll and a permeable belt comprising through openings, wherein an area of the through openings is at least approximately 25% of an area of a pressing portion of the permeable belt, and wherein the permeable belt is tensioned to at least approximately 30 KN/m, wherein the method comprises guiding at least the pressing portion of the permeable belt over the roll, moving the fibrous web between the roll and the pressing portion of the permeable belt, subjecting at least approximately 25% of the fibrous web to a pressure produced by portions of the permeable belt which are adjacent to the through openings, and moving a fluid through the through openings of the permeable belt and the fibrous web.

[0034] The invention also provides for a method of drying a fibrous web in a belt press which includes a roll and a permeable belt comprising through openings and grooves, wherein an area of the through openings is at least approximately 25% of an area of a pressing portion of the permeable belt, and wherein the permeable belt is tensioned to at least approximately 30 KN/m, wherein the method comprises guiding at least the pressing portion of the permeable belt over the roll, moving the fibrous web between the roll and the pressing portion of the permeable belt, subjecting at least approximately 10% of the fibrous web to a pressure produced by portions of the permeable belt which are adjacent to the through openings and the grooves, and moving a fluid through the through openings and the grooves of the permeable belt and the fibrous web.

[0035] According to another aspect of the invention, there is provided a more efficient

P25760.S04

dewatering process, preferably for the tissue manufacturing process, wherein the web achieves a dryness in the range of up to about 40% dryness. The process according to the invention is less expensive in machinery and in operational costs, and provides the same web quality as the TAD process. The bulk of the produced tissue web according to the invention is greater than approximately 10 g/cm^3 , up to the range of between approximately 14 g/cm^3 and approximately 16 g/cm^3 . The water holding capacity (measured by the basket method) of the produced tissue web according to the invention is greater than approximately $10 \text{ (g H}_2\text{O / g fiber)}$, and up to the range of between approximately $14 \text{ (g H}_2\text{O / g fiber)}$ and approximately $16 \text{ (g H}_2\text{O / g fiber)}$.

[0036] The invention thus provides for a new dewatering process, for thin paper webs, with a basis weight less than approximately 42 g/m^2 , preferably for tissue paper grades. The invention also provides for an apparatus which utilizes this process and also provides for elements with a key function for this process.

[0037] A main aspect of the invention is a press system which includes a package of at least one upper (or first), at least one lower (or second) fabric and a paper web disposed therebetween. A first surface of a pressure producing element is in contact with the at least one upper fabric. A second surface of a supporting structure is in contact with the at least one lower fabric and is permeable. A differential pressure field is provided between the first and the second surface, acting on the package of at least one upper and at least one lower fabric, and the paper web therebetween, in order to produce a mechanical pressure on the package and therefore on the paper web. This mechanical pressure produces a predetermined hydraulic pressure in the web, whereby the contained water is drained. The upper fabric has a bigger roughness and/or compressibility than the lower fabric. An airflow is caused in the direction from the at least one upper to the at least one lower fabric through the package of at least one upper and at least one lower fabric and the paper web therebetween.

[0038] Different possible modes and additional features are also provided. For

P25760.S04

example, the upper fabric may be permeable, and/or a so-called "structured fabric". By way of non-limiting examples, the upper fabric can be e.g., a TAD fabric, a membrane or fabric which includes a permeable base fabric and a lattice grid attached thereto and which is made of polymer such as polyurethane. The lattice grid side of the fabric can be in contact with a suction roll while the opposite side contacts the paper web. The lattice grid can also be oriented at an angle relative to machine direction yarns and cross-direction yarns. The base fabric is permeable and the lattice grid can be a anti-rewet layer. The lattice can also be made of a composite material, such as an elastomeric material. The lattice grid can itself include machine direction yarns with the composite material being formed around these yarns. With a fabric of the above mentioned type it is possible to form or create a surface structure that is independent of the weave patterns. At least for tissue, an important consideration is to provide a soft layer in contact with the sheet.

[0039] The upper fabric may transport the web to and from the press system. The web can lie in the three-dimensional structure of the upper fabric, and therefore it is not flat but has also a three-dimensional structure, which produces a high bulky web. The lower fabric is also permeable. The design of the lower fabric is made to be capable of storing water. The lower fabric also has a smooth surface. The lower fabric is preferably a felt with a batt layer. The diameter of the batt fibers of the lower fabric are equal to or less than approximately 11 dtex, and can preferably be equal to or lower than approximately 4.2 dtex, or more preferably be equal to or less than approximately 3.3 dtex. The batt fibers can also be a blend of fibers. The lower fabric can also contain a vector layer which contains fibers from approximately 67 dtex, and can also contain even courser fibers such as, e.g., approximately 100 dtex, approximately 140 dtex, or even higher dtex numbers. This is important for the good absorption of water. The wetted surface of the batt layer of the lower fabric and/or of the lower fabric itself can be equal to or greater than approximately 35 m²/m² felt area, and can preferably be equal to or greater than approximately 65 m²/m² felt area, and

P25760.S04

can most preferably be equal to or greater than approximately $100 \text{ m}^2/\text{m}^2$ felt area. The specific surface of the lower fabric should be equal to or greater than approximately $0.04 \text{ m}^2/\text{g}$ felt weight, and can preferably be equal to or greater than approximately $0.065 \text{ m}^2/\text{g}$ felt weight, and can most preferably be equal to or greater than approximately $0.075 \text{ m}^2/\text{g}$ felt weight. This is important for the good absorption of water. The dynamic stiffness K^* [N/mm] as a value for the compressibility is acceptable if less than or equal to 100,000 N/mm, preferable compressibility is less than or equal to 90,000 N/mm, and most preferably the compressibility is less than or equal to 70,000 N/mm. The compressibility (thickness change by force in mm/N) of the lower fabric should be considered. This is important in order to dewater the web efficiently to a high dryness level. A hard surface would not press the web between the prominent points of the structured surface of the upper fabric. On the other hand, the felt should not be pressed too deep into the three-dimensional structure to avoid loosing bulk and therefore quality, e.g., water holding capacity.

[0040] The compressibility (thickness change by force in mm/N) of the upper fabric is lower than that of the lower fabric. The dynamic stiffness K^* [N/mm] as a value for the compressibility of the upper fabric can be more than or equal to 3,000 N/mm and lower than the lower fabric. This is important in order to maintain the three-dimensional structure of the web, i.e., to ensure that the upper belt is a stiff structure.

[0041] The resilience of the lower fabric should be considered. The dynamic modulus for compressibility G^* [N/mm²] as a value for the resilience of the lower fabric is acceptable if more than or equal to 0.5 N/mm^2 , preferable resilience is more than or equal to 2 N/mm^2 , and most preferably the resilience is more than or equal to 4 N/mm^2 . The density of the lower fabric should be equal to or higher than approximately 0.4 g/cm^3 , and is preferably equal to or higher than approximately 0.5 g/cm^3 , and is ideally equal to or higher than approximately 0.53 g/cm^3 . This can be advantageous at web speeds of greater than approximately 1200 m/min. A reduced felt volume makes it easier to take the water away

P25760.S04

from the felt by the air flow, i.e., to get the water through the felt. Therefore the dewatering effect is smaller. The permeability of the lower fabric can be lower than approximately 80 cfm, preferably lower than approximately 40 cfm, and ideally equal to or lower than approximately 25 cfm. A reduced permeability makes it easier to take the water away from the felt by the air flow, i.e., to get the water through the felt. As a result, the re-wetting effect is smaller. A too high permeability, however, would lead to a too high air flow, less vacuum level for a given vacuum pump, and less dewatering of the felt because of the too open structure.

[0042] The second surface of the supporting structure can be flat and/or planar. In this regard, the second surface of the supporting structure can be formed by a flat suction box. The second surface of the supporting structure can preferably be curved. For example, the second surface of the supporting structure can be formed or run over a suction roll or cylinder whose diameter is, e.g., approximately 1 m or more or approximately 1.2 m or more. For example, for a production machine with a 200 inch width, the diameter can be in the range of approximately 1.5 m or more. The suction device or cylinder may comprise at least one suction zone. It may also comprise two suction zones. The suction cylinder may also include at least one suction box with at least one suction arc. At least one mechanical pressure zone can be produced by at least one pressure field (i.e., by the tension of a belt) or through the first surface by, e.g., a press element. The first surface can be an impermeable belt, but with an open surface toward the first fabric, e.g., a grooved or a blind drilled and grooved open surface, so that air can flow from outside into the suction arc. The first surface can be a permeable belt. The belt may have an open area of at least approximately 25%, preferably greater than approximately 35%, most preferably greater than approximately 50%. The belt may have a contact area of at least approximately 10%, at least approximately 25%, and preferably between approximately 50% and approximately 85% in order to have a good pressing contact.

P25760.S04

[0043] In addition, the pressure field can be produced by a pressure element, such as a shoe press or a roll press. This has the following advantage: If a very high bulky web is not required, this option can be used to increase dryness and therefore production to a desired value, by adjusting carefully the mechanical pressure load. Due to the softer second fabric the web is also pressed at least partly between the prominent points (valleys) of the three-dimensional structure. The additional pressure field can be arranged preferably before (no re-wetting), after or between the suction area. The upper permeable belt is designed to resist a high tension of more than approximately 30 KN/m, and preferably approximately 50 KN/m, or higher e.g., approximately 80 KN/m. By utilizing this tension, a pressure is produced of greater than approximately 0.3 bar, and preferably approximately 1 bar, or higher, may be e.g., approximately 1.5 bar. The pressure "p" depends on the tension "S" and the radius "R" of the suction roll according to the well known equation, $p=S/R$. As can be seen from the equation, the greater the roll diameter the greater the tension need to be to achieve the required pressure. The upper belt can also be a stainless steel and/or a metal band and/or a polymeric band. The permeable upper belt can be made of a reinforced plastic or synthetic material. It can also be a spiral linked fabric. Preferably, the belt can be driven to avoid shear forces between the first and second fabrics and the web. The suction roll can also be driven. Both of these can also be driven independently.

[0044] The first surface can be a permeable belt supported by a perforated shoe for the pressure load.

[0045] The air flow can be caused by a non-mechanical pressure field alone or in combination as follows: with an underpressure in a suction box of the suction roll or with a flat suction box, or with an overpressure above the first surface of the pressure producing element, e.g., by a hood, supplied with air, e.g., hot air of between approximately 50 degrees C and approximately 180 degrees C, and preferably between approximately 120 degrees C and approximately 150 degrees C, or also preferably steam. Such a higher temperature is

P25760.S04

especially important and preferred if the pulp temperature out of the headbox is less than about 35 degrees C. This is the case for manufacturing processes without or with less stock refining. Of course, all or some of the above-noted features can be combined.

[0046] The pressure in the hood can be less than approximately 0.2 bar, preferably less than approximately 0.1, most preferably less than approximately 0.05 bar. The supplied air flow to the hood can be less or preferable equal to the flow rate sucked out of the suction roll by vacuum pumps. A desired air flow is approximately 140 m³/min per meter of machine width. Supplied air flow to the hood at atmospheric pressure can be equal to approximately 500 m³/min per meter of machine width. The flow rate sucked out of the suction roll by a vacuum pump can have a vacuum level of approximately 0.6 bar at approximately 25 degrees C.

[0047] The suction roll can be wrapped partly by the package of fabrics and the pressure producing element, e.g., the belt, whereby the second fabric has the biggest wrapping arc "a₁" and leaves the arc zone lastly. The web together with the first fabric leaves secondly, and the pressure producing element leaves firstly. The arc of the pressure producing element is bigger than arc of the suction box. This is important, because at low dryness, the mechanical dewatering is more efficient than dewatering by airflow. The smaller suction arc "a₂" should be big enough to ensure a sufficient dwell time for the air flow to reach a maximum dryness. The dwell time "T" should be greater than approximately 40 ms, and preferably is greater than approximately 50 ms. For a roll diameter of approximately 1.2 m and a machine speed of approximately 1200 m/min, the arc "a₂" should be greater than approximately 76 degrees, and preferably greater than approximately 95 degrees. The formula is $a_2 = [\text{dwell time} * \text{speed} * 360 / \text{circumference of the roll}]$.

[0048] The second fabric can be heated e.g., by steam or process water added to the flooded nip shower to improve the dewatering behavior. With a higher temperature, it is easier to get the water through the felt. The belt could also be heated by a heater or by the

P25760.S04

hood or steam box. The TAD-fabric can be heated especially in the case when the former of the tissue machine is a double wire former. This is because, if it is a crescent former, the TAD fabric will wrap the forming roll and will therefore be heated by the stock which is injected by the headbox.

[0049] There are a number of advantages of this process describe herein. In the prior art TAD process, ten vacuum pumps are needed to dry the web to approximately 25% dryness. On the other hand, with the advanced dewatering system of the invention, only six vacuum pumps are needed to dry the web to approximately 35%. Also, with the prior art TAD process, the web must be dried up to a high dryness level of between about 60% and about 75%, otherwise a poor moisture cross profile would be created. This way a lot of energy is wasted and the Yankee and hood capacity is only used marginally. The system of the instant invention makes it possible to dry the web in a first step up to a certain dryness level of between approximately 30 and approximately 40%, with a good moisture cross profile. In a second stage, the dryness can be increased to an end dryness of more than approximately 90% using a conventional Yankee/hood (impingement) dryer combined the inventive system. One way to produce this dryness level, can include more efficient impingement drying via the hood on the Yankee.

[0050] With the system according to the invention, there is no need for through air drying. A paper having the same quality as produced on a TAD machine is generated with the inventive system utilizing the whole capability of impingement drying which is more efficient in drying the sheet from 35% to more than 90% solids.

[0051] The invention also provides for a belt press for a paper machine, wherein the belt press comprises a vacuum roll comprising an exterior surface and at least one suction zone. A permeable belt comprises a first side and is guided over a portion of the exterior surface of the vacuum roll. The permeable belt has a tension of at least approximately 30 KN/m. The first side has an open area of at least approximately 25% a contact area of at

P25760.S04

least approximately 10%.

[0052] The at least one suction zone may comprises a circumferential length of between approximately 200 mm and approximately 2,500 mm. The circumferential length may define an arc of between approximately 80 degrees and approximately 180 degrees. The circumferential length may define an arc of between approximately 80 degrees and approximately 130 degrees. The at least one suction zone may be adapted to apply vacuum for a dwell time which is equal to or greater than approximately 40 ms. The dwell time may be equal to or greater than approximately 50 ms. The permeable belt may exert a pressing force on the vacuum roll for a first dwell time which is equal to or greater than approximately 40 ms. The at least one suction zone may be adapted to apply vacuum for a second dwell time which is equal to or greater than approximately 40 ms. The second dwell time may be equal to or greater than approximately 50 ms. The first dwell time may be equal to or greater than approximately 50 ms. The permeable belt may comprise at least one spiral link fabric. The at least one spiral link fabric may comprise a synthetic, a plastic, a reinforced plastic, and/or a polymeric material. The at least one spiral link fabric may comprise stainless steel. The at least one spiral link fabric may comprise a tension which is between approximately 30 KN/m and approximately 80 KN/m. The tension may be between approximately 35 KN/m and approximately 70 KN/m.

[0053] The invention also provides for a method of pressing and drying a paper web, wherein the method comprises pressing, with a pressure producing element, the paper web between at least one first fabric and at least one second fabric and simultaneously moving a fluid through the paper web and the at least one first and second fabrics.

[0054] The pressing may occur for a dwell time which is equal to or greater than approximately 40 ms. The dwell time may be equal to or greater than approximately 50 ms. The simultaneously moving may occur for a dwell time which is equal to or greater than approximately 40 ms. This dwell time may be equal to or greater than approximately 50 ms.

P25760.S04

The pressure producing element may comprise a device which applies a vacuum. The vacuum may be greater than approximately 0.5 bar. The vacuum may be greater than approximately 1 bar. The vacuum may be greater than approximately 1.5 bar.

BRIEF DESCRIPTION OF THE DRAWINGS

[0055] The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become more apparent and the invention will be better understood by reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

Fig. 1 is a cross-sectional schematic diagram of an advanced dewatering system with an embodiment of a belt press according to the present invention;

Fig. 2 is a surface view of one side of a permeable belt of the belt press of Fig. 1;

Fig. 3 is a view of an opposite side of the permeable belt of Fig. 2;

Fig. 4 is cross-section view of the permeable belt of Figs. 2 and 3;

Fig. 5 is an enlarged cross-sectional view of the permeable belt of Figs. 2-4;

Fig. 5a is an enlarged cross-sectional view of the permeable belt of Figs. 2-4 and illustrating optional triangular grooves;

Fig. 5b is an enlarged cross-sectional view of the permeable belt of Figs. 2-4 and illustrating optional semi-circular grooves;

Fig. 5c is an enlarged cross-sectional view of the permeable belt of Figs. 2-4 illustrating optional trapezoidal grooves;

Fig. 6 is a cross-sectional view of the permeable belt of Fig. 3 along section line B-B;

Fig. 7 is a cross-sectional view of the permeable belt of Fig. 3 along section line A-A;

Fig. 8 is a cross-sectional view of another embodiment of the permeable belt of Fig. 3 along section line B-B;

Fig. 9 is a cross-sectional view of another embodiment of the permeable belt of Fig. 3 along section line A-A;

P25760.S04

Fig. 10 is a surface view of another embodiment of the permeable belt of the present invention;

Fig. 11 is a side view of a portion of the permeable belt of Fig. 10;

Fig. 12 is a cross-sectional schematic diagram of still another advanced dewatering system with an embodiment of a belt press according to the present invention;

Fig. 13 is an enlarged partial view of one dewatering fabric which can be used on the advanced dewatering systems of the present invention;

Fig. 14 is an enlarged partial view of another dewatering fabric which can be used on the advanced dewatering systems of the present invention;

Fig. 15 is a exaggerated cross-sectional schematic diagram of one embodiment of a pressing portion of the advanced dewatering system according to the present invention;

Fig. 16 is a exaggerated cross-sectional schematic diagram of another embodiment of a pressing portion of the advanced dewatering system according to the present invention;

Fig. 17 is a cross-sectional schematic diagram of still another advanced dewatering system with another embodiment of a belt press according to the present invention;

Fig. 18 is a partial side view of an optional permeable belt which may be used in the advanced dewatering systems of the present invention;

Fig. 19 is a partial side view of another optional permeable belt which may be used in the advanced dewatering systems of the present invention;

Fig. 20 is a cross-sectional schematic diagram of still another advanced dewatering system with an embodiment of a belt press which uses a pressing shoe according to the present invention;

Fig. 21 is a cross-sectional schematic diagram of still another advanced dewatering system with an embodiment of a belt press which uses a press roll according to the present invention;

Figs. 22a-b illustrate one way in which the contact area can be measured;

Fig. 23a illustrates an area of an Ashworth metal belt which can be used in the invention. The portions of the belt which are shown in black represent the contact area whereas the portions of the belt shown in white represent the non-contact area;

Fig. 23b illustrates an area of a Cambridge metal belt which can be used in the invention. The portions of the belt which are shown in black represent the contact area whereas the portions of the belt shown in white represent the non-contact area; and

Fig. 23c illustrates an area of a Voith Fabrics link fabric which can be used in the invention. The portions of the belt which are shown in black represent the contact area whereas the portions of the belt shown in white represent the non-contact area.

[0056] Corresponding reference characters indicate corresponding parts throughout the several views. The exemplary embodiments set out herein illustrate one or more acceptable or preferred embodiments of the invention, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION OF THE INVENTION

[0057] The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the present invention only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the present invention. In this regard, no attempt is made to show structural details of the present invention in more detail than is necessary for the fundamental understanding of the present invention, the description is taken with the drawings making apparent to those skilled in the art how the forms of the present invention may be embodied in practice.

[0058] Referring now to the drawings, and more particularly to Fig. 1, there is shown an advanced dewatering system 10 for processing a fibrous web 12. System 10 includes a fabric 14, a suction box 16, a vacuum roll 18, a dewatering fabric 20, a belt press assembly 22, a hood 24 (which may be a hot air hood), a pick up suction box 26, a Uhle box 28, one

or more shower units 30, and one or more savealls 32. The fibrous material web 12 enters system 10 generally from the right as shown in Fig. 1. Fibrous web 12 is a previously formed web (i.e., previously formed by a mechanism which is not shown) which is placed on the fabric 14. As is evident from Fig. 1, the suction device 16 provides suctioning to one side of the web 12, while the suction roll 18 provides suctioning to an opposite side of the web 12.

[0059] Fibrous web 12 is moved by fabric 14 in a machine direction M past one or more guide rolls and past a suction box 16. At the vacuum box 16, sufficient moisture is removed from web 12 to achieve a solids level of between approximately 15% and approximately 25% on a typical or nominal 20 gram per square meter (gsm) web running. The vacuum at the box 16 is between approximately -0.2 to approximately -0.8 bar vacuum, with a preferred operating level of between approximately -0.4 to approximately -0.6 bar.

[0060] As fibrous web 12 proceeds along the machine direction M, it comes into contact with a dewatering fabric 20. The dewatering fabric 20 can be an endless circulating belt which is guided by a plurality of guide rolls and is also guided around a suction roll 18. The dewatering belt 20 can be a dewatering fabric of the type shown and described in Figs. 13 or 14 herein. The dewatering fabric 20 can also preferably be a felt. The web 12 then proceeds toward vacuum roll 18 between the fabric 14 and the dewatering fabric 20. The vacuum roll 18 rotates along the machine direction M and is operated at a vacuum level of between approximately -0.2 to approximately -0.8 bar with a preferred operating level of at least approximately -0.4 bar, and most preferably approximately -0.6 bar. By way of non-limiting example, the thickness of the vacuum roll shell of roll 18 may be in the range of between approximately 25 mm and approximately 75 mm. The mean airflow through the web 12 in the area of the suction zone Z can be approximately 150 m³/min per meter of machine width. The fabric 14, web 12 and dewatering fabric 20 guided through a belt press 22 formed by the vacuum roll 18 and a permeable belt 34. As is shown in Fig. 1, the

P25760.S04

permeable belt 34 is a single endlessly circulating belt which is guided by a plurality of guide rolls and which presses against the vacuum roll 18 so as to form the belt press 22.

[0061] The upper fabric 14 transports the web 12 to and from the press system 22. The web 12 lies in the three-dimensional structure of the upper fabric 14, and therefore it is not flat but has also a three-dimensional structure, which produces a high bulky web. The lower fabric 20 is also permeable. The design of the lower fabric 20 is made to be capable of storing water. The lower fabric 20 also has a smooth surface. The lower fabric 20 is preferably a felt with a batt layer. The diameter of the batt fibers of the lower fabric 20 are equal to or less than approximately 11 dtex, and can preferably be equal to or lower than approximately 4.2 dtex, or more preferably be equal to or less than approximately 3.3 dtex. The batt fibers can also be a blend of fibers. The lower fabric 20 can also contain a vector layer which contains fibers from approximately 67 dtex, and can also contain even courser fibers such as, e.g., approximately 100 dtex, approximately 140 dtex, or even higher dtex numbers. This is important for the good absorption of water. The wetted surface of the batt layer of the lower fabric 20 and/or of the lower fabric itself can be equal to or greater than approximately 35 m²/m² felt area, and can preferably be equal to or greater than approximately 65 m²/m² felt area, and can most preferably be equal to or greater than approximately 100 m²/m² felt area. The specific surface of the lower fabric 20 should be equal to or greater than approximately 0.04 m²/g felt weight, and can preferably be equal to or greater than approximately 0.065 m²/g felt weight, and can most preferably be equal to or greater than approximately 0.075 m²/g felt weight. This is important for the good absorption of water. The dynamic stiffness K* [N/mm] as a value for the compressibility is acceptable if less than or equal to 100,000 N/mm, preferable compressibility is less than or equal to 90,000 N/mm, and most preferably the compressibility is less than or equal to 70,000 N/mm. The compressibility (thickness change by force in mm/N) of the lower fabric 20 should be considered. This is important in order to dewater the web efficiently to a high dryness level.

P25760.S04

A hard surface would not press the web 12 between the prominent points of the structured surface of the upper fabric. On the other hand, the felt should not be pressed too deep into the three-dimensional structure to avoid losing bulk and therefore quality, e.g., water holding capacity.

[0062] The circumferential length of vacuum zone Z can be between approximately 200 mm and approximately 2500 mm, and is preferably between approximately 800 mm and approximately 1800 mm, and an even more preferably between approximately 1200 mm and approximately 1600 mm. The solids content leaving vacuum roll 18 in web 12 will vary between approximately 25% to approximately 55% depending on the vacuum pressures and the tension on permeable belt, as well as the length of vacuum zone Z and the dwell time of web 12 in vacuum zone Z. The dwell time of web 12 in vacuum zone Z is sufficient to result in this solids range of between approximately 25% and approximately 55%.

[0063] With reference to Figs. 2-5, there is shown details of one embodiment of the permeable belt 34 of belt press 22. The belt 34 includes a plurality of through holes or through openings 36. The holes 36 are arranged in a hole pattern 38, of which Fig. 2 illustrates one non-limiting example thereof. As illustrated in Figs. 3-5, the belt 34 includes grooves 40 arranged on one side of belt 34, i.e., the outside of the belt 34 or the side which contacts the fabric 14. The permeable belt 34 is routed so as to engage an upper surface of the fabric 14 and thereby acts to press the fabric 14 against web 12 in the belt press 22. This, in turn, causes web 12 to be pressed against the fabric 20, which is supported thereunder by the vacuum roll 18. As this temporary coupling or pressing engagement continues around the vacuum roll 18 in the machine direction M, it encounters a vacuum zone Z. The vacuum zone Z receives air flow from the hood 24, which means that air passes from the hood 24, through the permeable belt 34, through the fabric 14, and through drying web 12 and finally through the belt 20 and into the zone Z. In this way, moisture is picked up from the web 12 and is transferred through the fabric 20 and through a porous surface of vacuum roll 18. As

a result, the web 12 experiences or is subjected to both pressing and airflow in a simultaneous manner. Moisture drawn or directed into vacuum roll 18 mainly exits by way of a vacuum system (not shown). Some of the moisture from the surface of roll 18, however, is captured by one or more savealls 32 which are located beneath vacuum roll 18. As web 12 leaves the belt press 22, the fabric 20 is separated from the web 12, and the web 12 continues with the fabric 14 past vacuum pick up device 26. The device 26 additionally suctions moisture from the fabric 14 and the web 12 so as to stabilize the web 12.

[0064] The fabric 20 proceeds past one or more shower units 30. These units 30 apply moisture to the fabric 20 in order to clean the fabric 20. The fabric 20 then proceeds past a Uhle box 28, which removes moisture from fabric 20.

[0065] The fabric 14 can be a structured fabric 14, i.e., it can have a three dimensional structure that is reflected in web 12, whereby thicker pillow areas of the web 12 are formed. The structured fabric 14 may have, e.g., approximately 44 mesh, between approximately 30 mesh and approximately 50 mesh for towel paper, and between approximately 50 mesh and approximately 70 mesh for toilet paper. These pillow areas are protected during pressing in the belt press 22 because they are within the body of the structured fabric 14. As such, the pressing imparted by belt press assembly 22 upon the web 12 does not negatively impact web or sheet quality. At the same time, it increases the dewatering rate of vacuum roll 18. If the belt 34 is used in a No Press / Low Press apparatus, the pressure can be transmitted through a dewatering fabric, also known as a press fabric. In this case, the web 12 is not protected with a structured fabric 14. However, the use of the belt 34 is still advantageous because the press nip is much longer than a conventional press, which results in a lower specific pressure and less or reduced sheet compaction of the web 12.

[0066] The permeable belt 34 shown in Figs. 2-5 can be made of metal, stainless steel and/or a polymeric material (or a combination of these materials), and can provide a low level of pressing in the range of between approximately 30 KPa and approximately 150 KPa,

P25760.S04

and preferably greater than approximately 70 KPa. Thus, if the suction roll 18 has a diameter of approximately 1.2 meter, the fabric tension for belt 34 can be greater than approximately 30 KN/m, and preferably greater than approximately 50 KN/m. The pressing length of permeable belt 34 against the fabric 14, which is indirectly supported by vacuum roll 18, can be at least as long as, or longer than, the circumferential length of the suction zone Z of roll 18. Of course, the invention also contemplates that the contact portion of permeable belt 34 (i.e., the portion of belt which is guided by or over the roll 18) can be shorter than suction zone Z.

[0067] As is shown in Figs. 2-5, the permeable belt 34 has a pattern 38 of through holes 36, which may, for example, be formed by drilling, laser cutting, etched formed, or woven therein. The permeable belt 34 may also be essentially monoplaner, i.e., formed without the grooves 40 shown in Figs. 3-5. The surface of the belt 34 which has the grooves 40 can be placed in contact with the fabric 14 along a portion of the travel of permeable belt 34 in a belt press 22. Each groove 40 connects with a set or row of holes 36 so as to allow the passage and distribution of air in the belt 34. Air is thus distributed along grooves 40. The grooves 40 and openings 36 thus constitute open areas of the belt 34 and are arranged adjacent to contact areas, i.e., areas where the surface of belt 34 applies pressure against the fabric 14 or the web 12. Air enters the permeable belt 34 through the holes 36 from a side opposite that of the side containing the grooves 40, and then migrates into and along the grooves 40 and also passes through the fabric 14, the web 12 and the fabric 20. As can be seen in Fig. 3, the diameter of holes 36 is larger than the width of the grooves 40. While circular holes 36 are preferred, they need not be circular and can have any shape or configuration which performs the intended function. Moreover, although the grooves 40 are shown in Fig. 5 as having a generally rectangular cross-section, the grooves 40 may have a different cross-sectional contour, such as, e.g., a triangular cross-section as shown in Fig. 5a, a trapezoidal cross-section as shown in Fig. 5c, and a semicircular or semi-elliptical cross-

section as shown in Fig. 5b. The combination of the permeable belt 34 and the vacuum roll 18, is a combination that has been shown to increase sheet solids level by at least approximately 15%.

[0068] By way of non-limiting example, the width of the generally parallel grooves 40 shown in Fig. 3 can be approximately 2.5 mm and the depth of the grooves 40 measured from the outside surface (i.e., the surface contacting belt 14) can be approximately 2.5 mm. The diameter of the through openings 36 can be approximately 4 mm. The distance, measured (of course) in the width direction, between the grooves 40 can be approximately 5 mm. The longitudinal distance (measured from the center-lines) between the openings 36 can be approximately 6.5 mm. The distance (measured from the center-lines in a direction of the width) between the openings 36, rows of openings, or grooves 40 can be approximately 7.5 mm. The openings 36 in every other row of openings can be offset by approximately half so that the longitudinal distance between adjacent openings can be half the distance between openings 36 of the same row, e.g., half of 6.5 mm. The overall width of the belt 34 can be approximately 160 mm more than the paper width and the overall length of the endlessly circulating belt 34 can be approximately 20 m. The tension limits of the belt 34 can be between, e.g., approximately 30 KN/m and approximately 50 KN/m.

[0069] Figs. 6-11 show other non-limiting embodiments of the permeable belt 34 which can be used in a belt press 22 of the type shown in Fig. 1. The belt 34 shown Figs. 6-9 may be an extended nip press belt made of a flexible reinforced polyurethane 42. It may also be a spiral link fabric 48 of the type shown in Figs. 10 and 11. The permeable belt 34 may also be a spiral link fabric of the type described in GB 2 141 749A, the disclosure of which is hereby expressly incorporated by reference in its entirety. The permeable belt 34 shown in Figs. 6-9 also provides a low level of pressing in the range of between approximately 30 KPa and approximately 150 KPa, and preferably greater than approximately 70 KPa. This allows, for example, a suction roll with a 1.2 meter diameter to provide a fabric tension of

greater than approximately 30 KN/m, and preferably greater than approximately 50 KN/m, it can also be greater than approximately 60 KN/m, and also greater than approximately 80 KN/m. The pressing length of the permeable belt 34 against the fabric 14, which is indirectly supported by vacuum roll 18, can be at least as long as or longer than suction zone Z in roll 18. Of course, the invention also contemplates that the contact portion of permeable belt 34 can be shorter than suction zone Z.

[0070] With reference to Figs. 6 and 7, the belt 34 can have the form of a polyurethane matrix 42 which has a permeable structure. The permeable structure can have the form of a woven structure with reinforcing machine direction yarns 44 and cross direction yarns 46 at least partially embedded within polyurethane matrix 42. The belt 34 also includes through holes 36 and generally parallel longitudinal grooves 40 which connect the rows of openings as in the embodiment shown in Figs 3-5.

[0071] Figs. 8 and 9 illustrate still another embodiment for the belt 34. The belt 34 includes a polyurethane matrix 42 which has a permeable structure in the form of a spiral link fabric 48. The link fabric 48 is at least partially embedded within polyurethane matrix 42. Holes 36 extend through belt 34 and may at least partially sever portions of spiral link fabric 48. Generally parallel longitudinal grooves 40 also connect the rows of openings and in the above-noted embodiments. The spiral link fabric described in this specification can also be made of a polymeric material and/or is preferably tensioned in the range of between approximately 30 KN/m and 80 KN/m, and preferably between approximately 35 KN/m and approximately 50 KN/m. This provides improved runnability of the belt, which is not able to withstand high tensions, and is balanced with sufficient dewatering of the paper web.

[0072] By way of non-limiting example, and with reference to the embodiments shown in Figs. 6-9, the width of the generally parallel grooves 40 shown in Fig. 7 can be approximately 2.5 mm and the depth of the grooves 40 measured from the outside surface (i.e., the surface contacting belt 14) can be approximately 2.5 mm. The diameter of the

P25760.S04

through openings 36 can be approximately 4 mm. The distance, measured (of course) in the width direction, between the grooves 40 can be approximately 5 mm. The longitudinal distance (measured from the center-lines) between the openings 36 can be approximately 6.5 mm. The distance (measured from the center-lines in a direction of the width) between the openings 36, rows of openings, or grooves 40 can be approximately 7.5 mm. The openings 36 in every other row of openings can be offset by approximately half so that the longitudinal distance between adjacent openings can be half the distance between openings 36 of the same row, e.g., half of 6.5 mm. The overall width of the belt 34 can be approximately 160 mm more than the paper width and the overall length of the endlessly circulating belt 34 can be approximately 20 m.

[0073] Figs. 10 and 11 shows yet another embodiment of the permeable belt 34. In this embodiment, yarns 50 are interlinked by entwining generally spiral woven yarns 50 with cross yarns 52 in order to form link fabric 48. Non-limiting examples of this belt can include a Ashworth Metal Belt, a Cambridge Metal belt and a Voith Fabrics Link Fabric and are shown in Figs. 23a-c. The spiral link fabric described in this specification can also be made of a polymeric material and/or is preferably tensioned in the range of between approximately 30 KN/m and 80 KN/m, and preferably between approximately 35 KN/m and approximately 50 KN/m. This provides improved runnability of the belt, which is not able to withstand high tensions, and is balanced with sufficient dewatering of the paper web. Fig. 23a illustrates an area of the Ashworth metal belt which is acceptable for use in the invention. The portions of the belt which are shown in black represent the contact area whereas the portions of the belt shown in white represent the non-contact area. The Ashworth belt is a metal link belt which is tensioned at approximately 60 KN/m. The open area may be between approximately 75% and approximately 85%. The contact area may be between approximately 15% and approximately 25%. Fig. 23b illustrates an area of a Cambridge metal belt which is preferred for use in the invention. Again, the portions of the belt which are shown in black represent

P25760.S04

the contact area whereas the portions of the belt shown in white represent the non-contact area. The Cambridge belt is a metal link belt which is tensioned at approximately 50 KN/m. The open area may be between approximately 68% and approximately 76%. The contact area may be between approximately 24% and approximately 32%. Finally, Fig. 23c illustrates an area of a Voith Fabrics link fabric which is most preferably used in the invention. The portions of the belt which are shown in black represent the contact area whereas the portions of the belt shown in white represent the non-contact area. The Voith Fabrics belt may be a polymer link fabric which is tensioned at approximately 40 KN/m. The open area may be between approximately 51% and approximately 62%. The contact area may be between approximately 38% and approximately 49%.

[0074] As with the previous embodiments, the permeable belt 34 shown in Figs. 10 and 11 is capable of running at high running tensions of between at least approximately 30 KN/m and at least approximately 50 KN/m or higher and may have a surface contact area of approximately 10% or greater, as well as an open area of approximately 15% or greater. The open area may be approximately 25% or greater. The composition of permeable belt 34 shown in Figs. 10 and 11 may include a thin spiral link structure having a support layer within permeable belt 34. The spiral link fabric can be made of metal and/or stainless steel. Further, permeable belt 34 may be a spiral link fabric 34 having a contact area of between approximately 15% and approximately 55 %, and an open area of between approximately 45% to approximately 85%. More preferably, the spiral link fabric 34 may have an open area of between approximately 50% and approximately 65%, and a contact area of between approximately 35% and approximately 50%.

[0075] The process of using the advanced dewatering system (ADS) 10 shown in Fig. 1 will now be described. The ADS 10 utilizes belt press 22 to remove water from web 12 after the web is initially formed prior to reaching belt press 22. A permeable belt 34 is routed in the belt press 22 so as to engage a surface of fabric 14 and thereby press fabric 14 further

against web 12, thus pressing the web 12 against fabric 20, which is supported thereunder by a vacuum roll 18. The physical pressure applied by the belt 34 places some hydraulic pressure on the water in web 12 causing it to migrate toward fabrics 14 and 20. As this coupling of web 12 with fabrics 14 and 20, and belt 34 continues around vacuum roll 18, in machine direction M, it encounters a vacuum zone Z through which air is passed from a hood 24, through the permeable belt 34, through the fabric 14, so as to subject the web 12 to drying. The moisture picked up by the air flow from the web 12 proceeds further through fabric 20 and through a porous surface of vacuum roll 18. In the permeable belt 34, the drying air from the hood 24 passes through holes 36, is distributed along grooves 40 before passing through the fabric 14. As web 12 leaves belt press 22, the belt 34 separates from the fabric 14. Shortly thereafter, the fabric 20 separates from web 12, and the web 12 continues with the fabric 14 past vacuum pick up unit 26, which additionally suctions moisture from the fabric 14 and the web 12.

[0076] The permeable belt 34 of the present invention is capable of applying a line force over an extremely long nip, i.e., 10 times longer than for a shoe press, thereby ensuring a long dwell time in which pressure is applied against web 12 as compared to a standard shoe press. This results in a much lower specific pressure, i.e., 20 times lower than for a shoe press, thereby reducing the sheet compaction and enhancing sheet quality. The present invention further allows for a simultaneous vacuum and pressing dewatering with airflow through the web at the nip itself.

[0077] Fig. 12 shows another an advanced dewatering system 110 for processing a fibrous web 112. The system 110 includes an upper fabric 114, a vacuum roll 118, a dewatering fabric 120, a belt press assembly 122, a hood 124 (which may be a hot air hood), a Uhle box 128, one or more shower units 130, one or more savealls 132, one or more heater units 129. The fibrous material web 112 enters system 110 generally from the right as shown in Fig. 12. The fibrous web 112 is a previously formed web (i.e., previously formed by a

P25760.S04

mechanism not shown) which is placed on the fabric 114. As was the case in Fig. 1, a suction device (not shown but similar to device 16 in Fig. 1) can provide suctioning to one side of the web 112, while the suction roll 118 provides suctioning to an opposite side of the web 112.

[0078] The fibrous web 112 is moved by fabric 114 in a machine direction M past one or more guide rolls. Although it may not be necessary, before reaching the suction roll, the web 112 may have sufficient moisture is removed from web 112 to achieve a solids level of between approximately 15% and approximately 25% on a typical or nominal 20 gram per square meter (gsm) web running. This can be accomplished by vacuum at a box (not shown) of between approximately -0.2 to approximately -0.8 bar vacuum, with a preferred operating level of between approximately -0.4 to approximately -0.6 bar.

[0079] As fibrous web 112 proceeds along the machine direction M, it comes into contact with a dewatering fabric 120. The dewatering fabric 120 can be an endless circulating belt which is guided by a plurality of guide rolls and is also guided around a suction roll 118. The web 112 then proceeds toward vacuum roll 118 between the fabric 114 and the dewatering fabric 120. The vacuum roll 118 can be a driven roll which rotates along the machine direction M and is operated at a vacuum level of between approximately -0.2 to approximately -0.8 bar with a preferred operating level of at least approximately -0.4 bar. By way of non-limiting example, the thickness of the vacuum roll shell of roll 118 may be in the range of between 25 mm and 75 mm. The mean airflow through the web 112 in the area of the suction zone Z can be approximately 150 m³/min per meter machine width. The fabric 114, web 112 and dewatering fabric 120 is guided through a belt press 122 formed by the vacuum roll 118 and a permeable belt 134. As is shown in Fig. 12, the permeable belt 134 is a single endlessly circulating belt which is guided by a plurality of guide rolls and which presses against the vacuum roll 118 so as to form the belt press 122. To control and/or adjust the tension of the belt 134, a tension adjusting roll TAR is provided as one of the guide

P25760.S04

rolls.

[0080] The circumferential length of vacuum zone Z can be between approximately 200 mm and approximately 2500 mm, and is preferably between approximately 800 mm and approximately 1800 mm, and an even more preferably between approximately 1200 mm and approximately 1600 mm. The solids leaving vacuum roll 118 in web 112 will vary between approximately 25% and approximately 55% depending on the vacuum pressures and the tension on permeable belt as well as the length of vacuum zone Z and the dwell time of web 112 in vacuum zone Z. The dwell time of web 112 in vacuum zone Z is sufficient to result in this solids range of between approximately 25% to approximately 55%.

[0081] The press system shown in Fig. 12 thus utilizes at least one upper or first permeable belt or fabric 114, at least one lower or second belt or fabric 120 and a paper web 112 disposed therebetween, thereby forming a package which can be led through the belt press 122 formed by the roll 118 and the permeable belt 134. A first surface of a pressure producing element 134 is in contact with the at least one upper fabric 114. A second surface of a supporting structure 118 is in contact with the at least one lower fabric 120 and is permeable. A differential pressure field is provided between the first and the second surfaces, acting on the package of at least one upper and at least one lower fabric and the paper web therebetween. In this system, a mechanical pressure is produced on the package and therefore on the paper web 112. This mechanical pressure produces a predetermined hydraulic pressure in the web 112, whereby the contained water is drained. The upper fabric 114 has a bigger roughness and/or compressibility than the lower fabric 120. An airflow is caused in the direction from the at least one upper 114 to the at least one lower fabric 120 through the package of at least one upper fabric 114, at least one lower fabric 120 and the paper web 112 therebetween.

[0082] The upper fabric 114 can be permeable and/or a so-called "structured fabric". By way of non-limiting examples, the upper fabric 114 can be e.g., a TAD fabric. The hood

124 can also be replaced with a steam box which has a sectional construction or design in order to influence the moisture or dryness cross-profile of the web.

[0083] With reference to Fig. 13, the lower fabric 120 can be a membrane or fabric which includes a permeable base fabric BF and a lattice grid LG attached thereto and which is made of polymer such as polyurethane. The lattice grid LG side of the fabric 120 can be in contact with the suction roll 118 while the opposite side contacts the paper web 112. The lattice grid LG may be attached or arranged on the base fabric BF by utilizing various known procedures, such as, for example, an extrusion technique or a screen printing technique. As shown in Fig. 13, the lattice grid LG can also be oriented at an angle relative to machine direction yarns MDY and cross-direction yarns CDY. Although this orientation is such that no part of the lattice grid LG is aligned with the machine direction yarns MDY, other orientations such as that shown in Fig. 14 can also be utilized. Although the lattice grid LG is shown as a rather uniform grid pattern, this pattern can also be discontinuous and/or non-symmetrical at least in part. Further, the material between the interconnections of the lattice structure may take a circuitous path rather than being substantially straight, as is shown in Fig. 13. Lattice grid LG can also be made of a synthetic, such as a polymer or specifically a polyurethane, which attaches itself to the base fabric BF by its natural adhesion properties. Making the lattice grid LG of a polyurethane provides it with good frictional properties, such that it seats well against the vacuum roll 118. This, then forces vertical airflow and eliminates any "x, y plane" leakage. The velocity of the air is sufficient to prevent any rewetting once the water makes it through the lattice grid LG. Additionally, the lattice grid LG may be a thin perforated hydrophobic film having an air permeability of approximately 35 cfm or less, preferably approximately 25 cfm. The pores or openings of the lattice grid LG can be approximately 15 microns. The lattice grid LG can thus provide good vertical airflow at high velocity so as to prevent rewet. With such a fabric 120, it is possible to form or create a surface structure that is independent of the weave patterns.

P25760.S04

[0084] With reference to Fig. 14, it can be seen that the lower dewatering fabric 120 can have a side which contacts the vacuum roll 118 which also includes a permeable base fabric BF and a lattice grid LG. The base fabric BF includes machine direction multifilament yarns MDY (which could also be mono or twisted mono yarns or combinations of multifil and monofil twisted and untwisted yarns from equal or different polymeric materials) and cross-direction multifilament yarns CDY (which could also be mono or twisted mono yarns or combinations of multifil and monofil twisted and untwisted yarns from equal or different polymeric materials) and is adhered to the lattice grid LG, so as to form a so called "anti-rewet layer". The lattice grid can be made of a composite material, such as an elastomeric material, which may be the same as the as the lattice grid described in Fig. 13. As can be seen in Fig. 14, the lattice grid LG can itself include machine direction yarns GMDY with an elastomeric material EM being formed around these yarns. The lattice grid LG may thus be composite grid mat formed on elastomeric material EM and machine direction yarns GMDY. In this regard, the grid machine direction yarns GMDY may be pre-coated with elastomeric material EM before being placed in rows that are substantially parallel in a mold that is used to reheat the elastomeric material EM causing it to re-flow into the pattern shown as grid LG in Fig. 14. Additional elastomeric material EM may be put into the mold as well. The grid structure LG, as forming the composite layer, is then connected to the base fabric BF by one of many techniques including the laminating of the grid LG to the permeable base fabric BF, melting the elastomeric coated yarn as it is held in position against the permeable base fabric BF or by re-melting the grid LG to the permeable base fabric BF. Additionally, an adhesive may be utilized to attach the grid LG to the permeable base fabric BF. The composite layer LG should be able to seal well against the vacuum roll 118 preventing "x,y plane" leakage and allowing vertical airflow to prevent rewet. With such a fabric, it is possible to form or create a surface structure that is independent of the weave patterns.

[0085] The belt 120 shown in Figs. 13 and 14 can also be used in place of the belt 20

P25760.S04

shown in the arrangement of Fig. 1.

[0086] Fig. 15 show an enlargement of one possible arrangement in a press. A suction support surface SS acts to support the fabrics 120, 114, 134 and the web 112. The suction support surface SS has suction openings SO. The openings SO can preferably be chamfered at the inlet side in order to provide more suction air. The surface SS may be generally flat in the case of a suction arrangement which uses a suction box of the type shown in, e.g., Fig. 16. Preferably, the suction surface SS is a moving curved roll belt or jacket of the suction roll 118. In this case, the belt 134 can be a tensioned spiral link belt of the type already described herein. The belt 114 can be a structured fabric and the belt 120 can be a dewatering felt of the types described above. In this arrangement, moist air is drawn from above the belt 134 and through the belt 114, web 112, and belt 120 and finally through the openings SO and into the suction roll 118. Another possibility shown in Fig. 16 provides for the suction surface SS to be a moving curved roll belt or jacket of the suction roll 118 and the belt 114 to be a SPECTRA membrane. In this case, the belt 134 can be a tensioned spiral link belt of the type already described herein. The belt 120 can be a dewatering felt of the types described above. In this arrangement, also moist air is drawn from above the belt 134 and through the belt 114, web 112, and belt 120 and finally through the openings SO and into the suction roll 118.

[0087] Fig. 17 illustrates another way in which the web 112 can be subjected to drying. In this case, a permeable support fabric SF (which can be similar to fabrics 20 or 120) is moved over a suction box SB. The suction box SB is sealed with seals S to an underside surface of the belt SF. A support belt 114 has the form of a TAD fabric and carries the web 112 into the press formed by the belt PF, and pressing device PD arranged therein, and the support belt SF and stationary suction box SB. The circulating pressing belt PF can be a tensioned spiral link belt of the type already described herein and/or of the type shown in Figs. 18 and 19. The belt PF can also alternatively be a groove belt and/or it can also be

P25760.S04

permeable. In this arrangement, the pressing device PD presses the belt PF with a pressing force PF against the belt SF while the suction box SB applies a vacuum to the belt SF, web 112 and belt 114. During pressing, moist air can be drawn from at least the belt 114, web 112 and belt SF and finally into the suction box SB.

[0088] The upper fabric 114 can thus transport the web 112 to and away from the press and/or pressing system. The web 112 can lie in the three-dimensional structure of the upper fabric 114, and therefore it is not flat, but instead has also a three-dimensional structure, which produces a high bulky web. The lower fabric 120 is also permeable. The design of the lower fabric 120 is made to be capable of storing water. The lower fabric 120 also has a smooth surface. The lower fabric 120 is preferably a felt with a batt layer. The diameter of the batt fibers of the lower fabric 120 can be equal to or less than approximately 11 dtex, and can preferably be equal to or lower than approximately 4.2 dtex, or more preferably be equal to or less than approximately 3.3 dtex. The batt fibers can also be a blend of fibers. The lower fabric 120 can also contain a vector layer which contains fibers from at least approximately 67 dtex, and can also contain even courser fibers such as, e.g., at least approximately 100 dtex, at least approximately 140 dtex, or even higher dtex numbers. This is important for the good absorption of water. The wetted surface of the batt layer of the lower fabric 120 and/or of the lower fabric 120 itself can be equal to or greater than approximately 35 m²/m² felt area, and can preferably be equal to or greater than approximately 65 m²/m² felt area, and can most preferably be equal to or greater than approximately 100 m²/m² felt area. The specific surface of the lower fabric 120 should be equal to or greater than approximately 0.04 m²/g felt weight, and can preferably be equal to or greater than approximately 0.065 m²/g felt weight, and can most preferably be equal to or greater than approximately 0.075 m²/g felt weight. This is important for the good absorption of water.

[0089] The compressibility (thickness change by force in mm/N) of the upper fabric

P25760.S04

114 is lower than that of the lower fabric 120. This is important in order to maintain the three-dimensional structure of the web 112, i.e., to ensure that the upper belt 114 is a stiff structure.

[0090] The resilience of the lower fabric 120 should be considered. The density of the lower fabric 120 should be equal to or higher than approximately 0.4 g/cm^3 , and is preferably equal to or higher than approximately 0.5 g/cm^3 , and is ideally equal to or higher than approximately 0.53 g/cm^3 . This can be advantageous at web speeds of greater than 1200 m/min. A reduced felt volume makes it easier to take the water away from the felt 120 by the air flow, i.e., to get the water through the felt 120. Therefore the dewatering effect is smaller. The permeability of the lower fabric 120 can be lower than approximately 80 cfm, preferably lower than 40 cfm, and ideally equal to or lower than 25 cfm. A reduced permeability makes it easier to take the water away from the felt 120 by the air flow, i.e., to get the water through the felt 120. As a result, the re-wetting effect is smaller. A too high permeability, however, would lead to a too high air flow, less vacuum level for a given vacuum pump, and less dewatering of the felt because of the too open structure.

[0091] The second surface of the supporting structure, i.e., the surface supporting the belt 120, can be flat and/or planar. In this regard, the second surface of the supporting structure SF can be formed by a flat suction box SB. The second surface of the supporting structure SF can preferably be curved. For example, the second surface of the supporting structure SS can be formed or run over a suction roll 118 or cylinder whose diameter is, e.g., approximately g.t. 1 m. The suction device or cylinder 118 may comprise at least one suction zone-Z. It may also comprise two suction zones Z1 and Z2 as is shown in Fig. 20. The suction cylinder 218 may also include at least one suction box with at least one suction arc. At least one mechanical pressure zone can be produced by at least one pressure field (i.e., by the tension of a belt) or through the first surface by, e.g., a press element. The first surface can be an impermeable belt 134, but with an open surface towards the first fabric 114, e.g.,

P25760.S04

a grooved or a blind drilled and grooved open surface, so that air can flow from outside into the suction arc. The first surface can be a permeable belt 134. The belt may have an open area of at least approximately 25%; preferably greater than approximately 35%, most preferably greater than approximately 50%. The belt 134 may have a contact area of at least approximately 10%, at least approximately 25%, and preferably between approximately 50% and approximately 85% in order to have a good pressing contact.

[0092] Fig. 20 shows another an advanced dewatering system 210 for processing a fibrous web 212. The system 210 includes an upper fabric 214, a vacuum roll 218, a dewatering fabric 220 and a belt press assembly 222. Other optional features which are not shown include a hood (which may be a hot air hood or steam box), one or more Uhle boxes, one or more shower units, one or more savealls, and one or more heater units, as is shown in Figs. 1 and 12. The fibrous material web 212 enters system 210 generally from the right as shown in Fig. 20. The fibrous web 212 is a previously formed web (i.e., previously formed by a mechanism not shown) which is placed on the fabric 214. As was the case in Fig. 1, a suction device (not shown but similar to device 16 in Fig. 1) can provide suctioning to one side of the web 212, while the suction roll 218 provides suctioning to an opposite side of the web 212.

[0093] The fibrous web 212 is moved by the fabric 214, which may be a TAD fabric, in a machine direction M past one or more guide rolls. Although it may not be necessary, before reaching the suction roll 218, the web 212 may have sufficient moisture is removed from web 212 to achieve a solids level of between approximately 15% and approximately 25% on a typical or nominal 20 gram per square meter (gsm) web running. This can be accomplished by vacuum at a box (not shown) of between approximately -0.2 to approximately -0.8 bar vacuum, with a preferred operating level of between approximately -0.4 to approximately -0.6 bar.

[0094] As fibrous web 212 proceeds along the machine direction M, it comes into

P25760.S04

contact with a dewatering fabric 220. The dewatering fabric 220 (which can be any type described herein) can be endless circulating belt which is guided by a plurality of guide rolls and is also guided around a suction roll 218. The web 212 then proceeds toward vacuum roll 218 between the fabric 214 and the dewatering fabric 220. The vacuum roll 218 can be a driven roll which rotates along the machine direction M and is operated at a vacuum level of between approximately -0.2 to approximately -0.8 bar with a preferred operating level of at least approximately -0.5 bar. By way of non-limiting example, the thickness of the vacuum roll shell of roll 218 may be in the range of between 25 mm and 75 mm. The mean airflow through the web 212 in the area of the suction zones Z1 and Z2 can be approximately 150 m³/meter of machine width. The fabric 214, web 212 and dewatering fabric 220 are guided through a belt press 222 formed by the vacuum roll 218 and a permeable belt 234. As is shown in Fig. 20, the permeable belt 234 is a single endlessly circulating belt which is guided by a plurality of guide rolls and which presses against the vacuum roll 218 so as to form the belt press 122. To control and/or adjust the tension of the belt 234, one of the guide rolls may be a tension adjusting roll. This arrangement also includes a pressing device arranged within the belt 234. The pressing device includes a journal bearing JB, one or more actuators A, and one or more pressing shoes PS which are preferably perforated.

[0095] The circumferential length of at least vacuum zone Z2 can be between approximately 200 mm and approximately 2500 mm, and is preferably between approximately 800 mm and approximately 1800 mm, and an even more preferably between approximately 1200 mm and approximately 1600 mm. The solids leaving vacuum roll 218 in web 212 will vary between approximately 25% and approximately 55% depending on the vacuum pressures and the tension on permeable belt 234 and the pressure from the pressing device PS/A/JB as well as the length of vacuum zone Z2, and the dwell time of web 212 in vacuum zone Z2. The dwell time of web 212 in vacuum zone Z2 is sufficient to result in this solids range of approximately 25% and approximately 55%.

[0096] Fig. 21 shows another an advanced dewatering system 310 for processing a fibrous web 312. The system 310 includes an upper fabric 314, a vacuum roll 318, a dewatering fabric 320 and a belt press assembly 322. Other optional features which are not shown include a hood (which may be a hot air hood or steam box), one or more Uhle boxes, one or more shower units, one or more savealls, and one or more heater units, as is shown in Figs. 1 and 12. The fibrous material web 312 enters system 310 generally from the right as shown in Fig. 21. The fibrous web 312 is a previously formed web (i.e., previously formed by a mechanism not shown) which is placed on the fabric 314. As was the case in Fig. 1, a suction device (not shown but similar to device 16 in Fig. 1) can provide suctioning to one side of the web 312, while the suction roll 318 provides suctioning to an opposite side of the web 312.

[0097] The fibrous web 312 is moved by fabric 314, which can be a TAD fabric, in a machine direction M past one or more guide rolls. Although it may not be necessary, before reaching the suction roll 318, the web 212 may have sufficient moisture is removed from web 212 to achieve a solids level of between approximately 15% and approximately 25% on a typical or nominal 20 gram per square meter (gsm) web running. This can be accomplished by vacuum at a box (not shown) of between approximately -0.2 to approximately -0.8 bar vacuum, with a preferred operating level of between approximately -0.4 to approximately -0.6 bar.

[0098] As fibrous web 312 proceeds along the machine direction M, it comes into contact with a dewatering fabric 320. The dewatering fabric 320 (which can be any type described herein) can be endless circulating belt which is guided by a plurality of guide rolls and is also guided around a suction roll 318. The web 312 then proceeds toward vacuum roll 318 between the fabric 314 and the dewatering fabric 320. The vacuum roll 318 can be a driven roll which rotates along the machine direction M and is operated at a vacuum level of between approximately -0.2 to approximately -0.8 bar with a preferred operating level of

P25760.S04

at least approximately -0.5 bar. By way of non-limiting example, the thickness of the vacuum roll shell of roll 318 may be in the range of between 25 mm and 75 mm. The mean airflow through the web 312 in the area of the suction zones Z1 and Z2 can be approximately 150 m³/meter of machine width. The fabric 314, web 312 and dewatering fabric 320 are guided through a belt press 322 formed by the vacuum roll 318 and a permeable belt 334. As is shown in Fig. 21, the permeable belt 334 is a single endlessly circulating belt which is guided by a plurality of guide rolls and which presses against the vacuum roll 318 so as to form the belt press 322. To control and/or adjust the tension of the belt 334, one of the guide rolls may be a tension adjusting roll. This arrangement also includes a pressing roll RP arranged within the belt 334. The pressing device RP can be press roll and can be arranged either before the zone Z1 or between the two separated zones Z1 and Z2 at optional location OL.

[0099] The circumferential length of at least vacuum zone Z1 can be between approximately 200 mm and approximately 2500 mm, and is preferably between approximately 800 mm and approximately 1800 mm, and an even more preferably between approximately 1200 mm and approximately 1600 mm. The solids leaving vacuum roll 318 in web 312 will vary between approximately 25% and approximately 55% depending on the vacuum pressures and the tension on permeable belt 334 and the pressure from the pressing device RP as well as the length of vacuum zone Z1 and also Z2, and the dwell time of web 312 in vacuum zones Z1 and Z2. The dwell time of web 312 in vacuum zones Z1 and Z2 is sufficient to result in this solids range between approximately 25% and approximately 55%.

[0100] The arrangements shown in Figs. 20 and 21 have the following advantages: if a very high bulky web is not required, this option can be used to increase dryness and therefore production to a desired value, by adjusting carefully the mechanical pressure load. Due to the softer second fabric 220 or 320, the web 212 or 312 is also pressed at least partly between the prominent points (valleys) of the three-dimensional structure 214 or 314. The

P25760.S04

additional pressure field can be arranged preferably before (no re-wetting), after, or between the suction area. The upper permeable belt 234 or 334 is designed to resist a high tension of more than approximately 30 KN/m, and preferably approximately 60 KN/m, or higher e.g., approximately 80 KN/M. By utilizing this tension, a pressure is produced of greater than approximately 0.5 bars, and preferably approximately 1 bar, or higher, may be e.g., approximately 1.5 bar. The pressure "p" depends on the tension "S" and the radius "R" of the suction roll 218 or 318 according to the well known equation, $p=S/R$. The upper belt 234 or 334 can also be stainless steel and/or a metal band. The permeable upper belt 234 or 334 can be made of a reinforced plastic or synthetic material. It can also be a spiral-linked fabric. Preferably, the belt 234 or 334 can be driven to avoid shear forces between the first fabric 214 or 314, the second fabric 220 or 320 and the web 212 or 312. The suction roll 218 or 318 can also be driven. Both of these can also be driven independently.

[0101] The permeable belt 234 or 334 can be supported by a perforated shoe PS for providing the pressure load.

[0102] The air flow can be caused by a non-mechanical pressure field as follows: with an underpressure in a suction box of the suction roll (118, 218 or 318) or with a flat suction box SB (see Fig. 17). It can also utilize an overpressure above the first surface of the pressure producing element 134, PS, RP, 234 and 334 by, e.g., by hood 124 (although not shown, a hood can also be provided in the arrangements shown in Figs. 17, 20 and 21), supplied with air, e.g., hot air of between approximately 50 degrees C and approximately 180 degrees C, and preferably between approximately 120 degrees C and approximately 150 degrees C, or also preferably steam. Such a higher temperature is especially important and preferred if the pulp temperature out of the headbox is less than about 35 degrees C. This is the case for manufacturing processes without or with less stock refining. Of course, all or some of the above-noted features can be combined to form advantageous press arrangements, i.e. both the underpressure and the overpressure arrangements/devices can be utilized

P25760.S04

together.

[0103] The pressure in the hood can be less than approximately 0.2 bar, preferably less than approximately 0.1, most preferably less than approximately 0.05 bar. The supplied air flow to the hood can be less or preferable equal to the flow rate sucked out of the suction roll 118, 218, or 318 by vacuum pumps.

[0104] The suction roll 118, 218 and 318 can be wrapped partly by the package of fabrics 114, 214, or 314 and 120, 220, or 320, and the pressure producing element, e.g., the belt 134, 234, or 334, whereby the second fabric e.g., 220, has the biggest wrapping arc "a2" and leaves the larger arc zone Z1 lastly (see Fig. 20). The web 212 together with the first fabric 214 leaves secondly (before the end of the first arc zone Z2), and the pressure producing element PS/234 leaves firstly. The arc of the pressure producing element PS/234 is greater than an arc of the suction zone arc "a2". This is important, because at low dryness, the mechanical dewatering together with dewatering by air flow is more efficient than dewatering by airflow only. The smaller suction arc "a1" should be big enough to ensure a sufficient dwell time for the air flow to reach a maximum dryness. The dwell time "T" should be greater than approximately 40 ms, and preferably is greater than approximately 50 ms. For a roll diameter of approximately 1.2 mm and a machine speed of approximately 1200 m/min, the arc "a1" should be greater than approximately 76 degrees, and preferably greater than approximately 95 degrees. The formula is $a1 = [\text{dwell time} * \text{speed} * 360 / \text{circumference of the roll}]$.

[0105] The second fabric 120, 220, 320 can be heated e.g., by steam or process water added to the flooded nip shower to improve the dewatering behavior. With a higher temperature, it is easier to get the water through the felt 120, 220, 320. The belt 120, 220, 320 could also be heated by a heater or by the hood, e.g., 124. The TAD-fabric 114, 214, 314 can be heated especially in the case when the former of the tissue machine is a double wire former. This is because, if it is a crescent former, the TAD fabric 114, 214, 314 will wrap

P25760.S04

the forming roll and will therefore be heated by the stock which is injected by the headbox.

[0106] There are a number of advantages of the process using any of the herein disclosed devices such as. In the prior art TAD process, ten vacuum pumps are needed to dry the web to approximately 25% dryness. On the other hand, with the advanced dewatering systems of the invention, only six vacuum pumps are needed to dry the web to approximately 35%. Also, with the prior art TAD process, the web must be dried up to a high dryness level of between about 60% and about 75%, otherwise a poor moisture cross profile would be created. This way a lot of energy is wasted and the Yankee and hood capacity is only used marginally. The systems of the instant invention make it possible to dry the web in a first step up to a certain dryness level of between approximately 30% to approximately 40%, with a good moisture cross profile. In a second stage, the dryness can be increased to an end dryness of more than approximately 90% using a conventional Yankee/hood (impingement) dryer combined the inventive system. One way to produce this dryness level, can include more efficient impingement drying via the hood on the Yankee.

[0107] As can be seen in Figs. 22a and 22b, the contact area of the belt BE can be measured by placing the belt upon a flat and hard surface. A low and/or thin amount of die is placed on the belt surface using a brush or a rag. A piece of paper PA is placed over the dyed area. A rubber stamp RS having a 70 shore A hardness is placed onto the paper. A 90 kg load L is placed onto the stamp. The load creates a specific pressure SP of about 90 KPa.

[0108] The entire disclosure of US patent application 10/768,485 filed on January 30, 2004 is hereby expressly incorporated by reference in its entirety.

[0109] The instant application expressly incorporates by reference the entire disclosure of the US patent application _____ entitled ADVANCED DEWATERING SYSTEM in the name of Jeffrey HERMAN et al. (Attorney Docket No. P25767).

[0110] It is noted that the foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the present invention. While

P25760.S04

the present invention has been described with reference to an exemplary embodiment, it is understood that the words that have been used are words of description and illustration, rather than words of limitation. Changes may be made, within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the present invention in its aspects. Although the invention has been described herein with reference to particular means, materials and embodiments, the invention is not intended to be limited to the particulars disclosed herein. Instead, the invention extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims.

P25760.S04

WHAT IS CLAIMED:

1. A belt press for a paper machine, the belt press comprising:
a roll comprising an exterior surface;
a permeable belt comprising a first side and being guided over a portion of said exterior surface of said roll;
said permeable belt having a tension of at least approximately 30 KN/m;
said first side having an open area of at least approximately 25% a contact area of at least approximately 10%.
2. The belt press of claim 1, wherein said first side faces the exterior surface and wherein said permeable belt exerts a pressing force on said roll.
3. The belt press of claim 1, wherein said permeable belt comprises through openings.
4. The belt press of claim 1, wherein said permeable belt comprises through openings arranged in a generally regular symmetrical pattern.
5. The belt press of claim 1, wherein said permeable belt comprises generally parallel rows of through openings, whereby the rows are oriented along a machine direction.
6. The belt press of claim 1, wherein said permeable belt exerts a pressing force on said roll in the range of between approximately 30 KPa to approximately 150 KPa.
7. The belt press of claim 1, wherein said permeable belt comprises through openings and a plurality of grooves, each groove intersecting a different set of through openings.

P25760.S04

8. The belt press of claim 7, wherein said first side faces the exterior surface and wherein said permeable belt exerts a pressing force on said roll.

9. The belt press of claim 8, wherein said plurality of grooves arranged on said first side.

10. The belt press of claim 7, wherein each of said plurality of grooves comprises a width, and wherein each of the through openings comprises a diameter, and wherein said diameter is greater than said width.

11. The belt press of claim 1, wherein said tension of said belt is greater than approximately 50 KN/m.

12. The belt press of claim 11, wherein said tension of said belt is greater than approximately 60 KN/m.

13. The belt press of claim 11, wherein said tension of said belt is greater than approximately 80 KN/m.

14. The belt press of claim 1, wherein said roll comprises a vacuum roll.

15. The belt press of claim 1, wherein said roll comprises a vacuum roll having an interior circumferential portion.

16. The belt press of claim 15, wherein said vacuum roll comprises at least one vacuum zone arranged within said interior circumferential portion.

P25760.S04

17. The belt press of claim 1, wherein said roll comprises a vacuum roll having a suction zone.

18. The belt press of claim 17, wherein said suction zone comprises a circumferential length of between approximately 200 mm and approximately 2,500 mm.

19. The belt press of claim 18, wherein said circumferential length is in the range of between approximately 800 mm and approximately 1,800 mm.

20. The belt press of claim 19, wherein said circumferential length is in the range of between approximately 1,200 mm and approximately 1,600 mm.

21. The belt press of claim 1, wherein said permeable belt comprises at least one of a polyurethane extended nip belt and a spiral link fabric.

22. The belt press of claim 1, wherein said permeable belt comprises a polyurethane extended nip belt which includes a plurality of reinforcing yarns embedded therein and wherein said reinforcing yarns comprise at least one of mono yarns, twisted yarns, multifilament yarns, and a combination of mono yarns, twisted yarns and multifilament yarns.

23. The belt press of claim 22, wherein said plurality of reinforcing yarns comprise a plurality of machine direction yarns and a plurality of cross direction yarns.

24. The belt press of claim 1, wherein said permeable belt comprises a polyurethane extended nip belt having a plurality of reinforcing yarns embedded therein, said plurality of reinforcing yarns being woven in a spiral link manner.

P25760.S04

25. The belt press of claim 1, wherein said permeable belt comprises at least one spiral link fabric which includes at least one of a synthetic material, a stainless steel material, and a combination of a synthetic material and a stainless steel material.

26. The belt press of claim 25, wherein said at least one spiral link fabric comprises a synthetic material.

27. The belt press of claim 25, wherein said at least one spiral link fabric comprises stainless steel.

28. The belt press of claim 1, wherein said permeable belt comprises a permeable fabric which is reinforced by at least one spiral link belt.

29. The belt press of claim 1, further comprising:
a first fabric and a second fabric traveling between said permeable belt and said roll;
said first fabric having a first side and a second side;
said first side of said first fabric being in at least partial contact with said exterior surface of said roll;
said second side of said first fabric being in at least partial contact with a first side of a fibrous web;
said second fabric having a first side and a second side;
said first side of said second fabric being in at least partial contact with said first side of said permeable belt; and
said second side of said second fabric being in at least partial contact with a second side of said fibrous web.

P25760.S04

30. The belt press of claim 29, wherein said first fabric comprises one of a permeable dewatering belt, a felt, a woven fabric, and a wire.

31. The belt press of claim 29, wherein said second fabric comprises one of a structured fabric and a TAD fabric.

32. The belt press of claim 29, wherein said fibrous web comprises a tissue web or hygiene web.

33. A fibrous material drying arrangement comprising:
an endlessly circulating permeable extended nip press (ENP) belt guided over a roll;
said ENP belt being subjected to a tension of at least approximately 30 KN/m;
said ENP belt comprising a side having an open area of at least approximately 25%
and a contact area of at least approximately 10%.

34. A permeable extended nip press (ENP) belt which is capable of being subjected to a tension of at least approximately 30 KN/m, said permeable ENP belt comprising:
at least one side comprising an open area of at least approximately 25% and a contact area of at least approximately 10%.

35. The ENP belt of claim 34, wherein the open area is defined by through openings and the contact area is defined by a planar surface.

36. The ENP belt of claim 34, wherein the open area is defined by through openings and the contact area is defined by a planar surface without openings, recesses, or grooves.

P25760.S04

37. The ENP belt of claim 34, wherein the open area is defined by through openings and grooves, and the contact area is defined by a planar surface without openings, recesses, or grooves.

38. The ENP belt of claim 34, wherein said open area is between approximately 15% and approximately 50%, and said contact area is between approximately 50% and approximately 85%.

39. The ENP belt of claim 34, wherein said permeable ENP belt comprises a spiral link fabric.

40. The ENP belt of claim 39, wherein said open area is between approximately 30% and approximately 85%, and said contact area is between approximately 15% and approximately 70%.

41. The ENP belt of claim 39, wherein said open area is between approximately 45% and approximately 85%, and said contact area is between approximately 15% and approximately 55%.

42. The ENP belt of claim 39, wherein said open area is between approximately 50% and approximately 65%, and said contact area is between approximately 35% and approximately 50%.

43. The ENP belt of claim 34, wherein said permeable ENP belt comprises through openings arranged in a generally symmetrical pattern.

P25760.S04

44. The ENP belt of claim 34, wherein said permeable ENP belt comprises through openings arranged in generally parallel rows relative to a machine direction.

45. The ENP belt of claim 34, wherein said permeable ENP belt comprises an endless circulating belt.

46. The ENP belt of claim 34, wherein said permeable ENP belt comprises through openings and wherein said at least one side of said permeable ENP belt comprises a plurality of grooves, each of said plurality of grooves intersecting a different set of through hole.

47. The ENP belt of claim 46, wherein each of said plurality of grooves comprises a width, and wherein each of said through openings comprises a diameter, and wherein said diameter is greater than said width.

48. The ENP belt of claim 47, wherein each of said plurality of grooves extend into the permeable ENP belt by an amount which is less than a thickness of the permeable belt.

49. The ENP belt of claim 34, wherein said tension is one of greater than approximately 50 KN/m, greater than approximately 60 KN/m, and greater than approximately 80 KN/m.

50. The ENP belt of claim 34, wherein said permeable ENP belt comprises a flexible reinforced polyurethane member.

51. The ENP belt of claim 34, wherein said permeable ENP belt comprises a flexible spiral link fabric.

P25760.S04

52. The ENP belt of claim 34, wherein said permeable ENP belt comprises a flexible polyurethane member having a plurality of reinforcing yarns embedded therein.

53. The ENP belt of claim 52, wherein said plurality of reinforcing yarns comprise a plurality of machine direction yarns and a plurality of cross direction yarns.

54. The ENP belt of claim 34, wherein said permeable ENP belt comprises a flexible polyurethane material and a plurality of reinforcing yarns embedded therein, said plurality of reinforcing yarns being woven in a spiral link manner.

55. The ENP belt of claim 34, wherein said permeable ENP belt comprises at least one spiral link fabric.

56. The ENP belt of claim 55, wherein said at least one spiral link fabric comprises a synthetic material.

57. The ENP belt of claim 55, wherein said at least one spiral link fabric comprises stainless steel.

58. The ENP belt of claim 34, wherein said permeable ENP belt comprises a permeable fabric which is reinforced by at least one spiral link belt.

59. A method of subjecting a fibrous web to pressing in a paper machine, the method comprising:

applying pressure against a contact area of the fibrous web with a portion of a permeable belt, wherein the contact area is at least approximately 25% of an area of said

P25760.S04

portion; and

moving a fluid through an open area of said permeable belt and through the fibrous web, wherein said open area is at least approximately 25% of said portion,

wherein, during the applying and the moving, said permeable belt has a tension of at least approximately 30 KN/m.

60. The method of claim 59, wherein said contact area of the fibrous web comprises areas which are pressed more by said portion than non-contact areas of the fibrous web.

61. The method of claim 59, wherein said portion of the permeable belt comprises a generally planar surface which includes no openings, recesses, or grooves and which is guided over a roll.

62. The method of claim 59, wherein said fluid comprises air.

63. The method of claim 59, wherein said open area of said permeable belt comprises through openings and grooves.

64. The method of claim 59, wherein said tension is greater than approximately 50 KN/m.

65. The method of claim 64, wherein said tension is greater than approximately 60 KN/m.

66. The method of claim 65, wherein said tension is greater than approximately 80 KN/m.

P25760.S04

67. The method of claim 59, further comprising:

rotating a roll in a machine direction,

wherein said permeable belt moves in concert with and is guided over or by said roll.

68. The method of claim 59, wherein said permeable belt comprises a plurality of grooves and through openings, each of said plurality of grooves being arranged on a side of said permeable belt and intersecting with a different set of through openings.

69. The method of claim 59; wherein said applying and said moving occur for a dwell time which is sufficient to produce a fibrous web solids level in the range of between approximately 25% to 55%.

70. The method of claim 69, wherein said dwell time is one of equal to or greater than approximately 40 ms and equal to or greater than approximately 50 ms.

71. The method of claim 59, wherein said permeable belt comprises a spiral link fabric.

72. A method of pressing a fibrous web in a paper machine, the method comprising:
applying a first pressure against first portions of the fibrous web with a permeable belt and a second greater pressure against second portions of the fibrous web with a pressing portion of the permeable belt, wherein an area of the second portions is at least approximately 25% of an area of the first portions; and

moving air through open portions of said permeable belt, wherein an area of the open portions is at least approximately 25% of the pressing portion of the permeable belt which applies the first and second pressures,

P25760.S04

wherein, during the applying and the moving, said permeable belt has a tension of at least approximately 30 KN/m.

73. The method of claim 72, wherein said tension is one of greater than approximately 50 KN/m, greater than approximately 60 KN/m, and greater than approximately 80 KN/m.

74. The method of claim 72, further comprising:
rotating a roll in a machine direction, said permeable belt moving in concert with said roll.

75. The method of claim 72, wherein said area of the open portions is at least approximately 50% of the pressing portion.

76. The method of claim 72, wherein said area of the open portions is at least approximately 70% of the pressing portion.

77. The method of claim 72, wherein an average of a sum of said first pressure and said second greater pressure is in the range of between approximately 30 KPa to approximately 150 KPa.

78. The method of claim 72, wherein said moving and said applying occur substantially simultaneously.

79. The method of claim 72, further comprising moving the air through the fibrous web for a dwell time which is sufficient to produce a fibrous web solids in the range of between approximately 25% and approximately 55%.

P25760.S04

80. The method of claim 79, wherein said dwell time is one of equal to or greater than approximately 40 ms and equal to or greater than approximately 50 ms.

81. The method of claim 72, further comprising applying, with a roll, a pressing force against the pressing portion of the permeable belt.

82. A method of drying a fibrous web in a belt press which includes a roll and a permeable belt comprising through openings, wherein an area of the through openings of a pressing portion of the permeable belt is at least approximately 25% of an area of the pressing portion, and wherein the permeable belt is tensioned to at least approximately 30 KN/m, the method comprising:

guiding at least the pressing portion of the permeable belt over the roll;

moving the fibrous web between the roll and the pressing portion of the permeable belt;

subjecting at least approximately 10% of the fibrous web to a pressure produced by portions of the permeable belt which are adjacent to the through openings; and

moving a fluid through the through openings of the permeable belt and the fibrous web.

83. The method of claim 82, wherein the permeable belt comprises grooves and wherein the subjecting comprises subjecting at least approximately 25% of the fibrous web to a pressure produced by portions of the permeable belt which are adjacent to the through openings and the grooves.

84. The method of claim 82, wherein the permeable belt comprises a spiral link fabric.

P25760.S04

85. The method of claim 82, wherein the portions of the permeable belt which are adjacent to the through openings comprises a contact area, and wherein the contact area is at least approximately 25% of the area of the pressing portion.

86. A pressing arrangement comprising:

at least one first fabric;

at least one second fabric;

the at least one first fabric and the at least one second fabric being permeable;

a paper web disposed between the first and second fabrics;

a pressure producing element being in contact with the at least one first fabric;

a support surface of a supporting structure being in contact with the at least one second fabric; and

a differential pressure being provided between the first fabric and the support surface and acting on the at least one first fabric, the paper web, and the at least one second fabric, whereby the paper web is subjected to mechanical pressure and experiences a predetermined hydraulic pressure so as to cause water to be drained from the paper web;

wherein the pressing arrangement is structured and arranged to allow air to flow in a direction from the at least one first fabric, through the paper web, through the at least one second fabric.

87. The arrangement of claim 86, wherein the at least one first fabric is a structured fabric and has at least one of a greater roughness and a lower compressibility than the at least one second fabric and wherein the pressing arrangement is structured and arranged to allow air to flow in a direction from the at least one first fabric, through the paper web, through the at least one second fabric, and at least one of through the support surface and into recesses in the support surface.

88. The arrangement of claim 86, wherein the at least one first fabric is a TAD fabric.

89. The arrangement of claim 86, wherein the at least one first fabric is a membrane.

90. The arrangement of claim 86, wherein the at least one first fabric is one of a printed membrane and a printed fabric.

91. The arrangement of claim 86, wherein the at least one second fabric includes a permeable base fabric and a lattice grid attached thereto and which is made of polymer such as polyurethane.

92. The arrangement of claim 91, wherein a lattice grid side of the at least one second fabric is in contact with the support surface of a suction roll while an opposite side of the at least one second fabric contacts the paper web.

93. The arrangement of claim 91, wherein the lattice grid is oriented at an angle relative to machine direction yarns and cross-direction yarns of the permeable base fabric.

94. The arrangement of claim 91, wherein the lattice grid comprises an anti-rewet layer and a soft material layer which contacts the paper web.

95. The arrangement of claim 91, wherein the lattice grid comprises an elastomeric material and machine direction yarns.

96. The arrangement of claim 86, wherein the at least one first fabric transports the paper web to and from the press arrangement.

P25760.S04

97. The arrangement of claim 86, wherein the at least one first fabric comprises a three-dimensional structure, whereby the press arrangement processes a high bulky web.

98. The arrangement of claim 86, wherein the at least one second fabric is capable of storing or absorbing water.

99. The arrangement of claim 86, wherein the at least one second fabric comprises at least one smooth surface.

100. The arrangement of claim 86, wherein the at least one second fabric comprises a felt with a batt layer.

101. The arrangement of claim 100, wherein a diameter of batt fibers of the batt layer may one of: equal to or less than 11 dtex; equal to or less than 4.2 dtex; and equal to or less than 3.3 dtex.

102. The arrangement of claim 86, wherein the at least one second fabric comprises one of: a blend of batt fibers; and a vector layer which contains fibers which are equal to or greater than approximately 67 dtex.

103. The arrangement of claim 86, wherein a specific surface of the at least one second fabric comprises one of: equal to or greater than $35 \text{ m}^2/\text{m}^2$ felt area; equal to or greater than $65 \text{ m}^2/\text{m}^2$ felt area; and equal to or greater than $100 \text{ m}^2/\text{m}^2$ felt area.

104. The arrangement of claim 86, wherein a specific surface of the at least one second fabric comprises one of: equal to or greater than $0.04 \text{ m}^2/\text{g}$ felt weight; equal to or

P25760.S04

greater than $0.065 \text{ m}^2/\text{g}$ felt weight; and equal to or greater than $0.075 \text{ m}^2/\text{g}$ felt weight.

105. The arrangement of claim 86, wherein a density of the at least one second fabric comprises one of: equal to or higher than 0.4 g/cm^3 ; equal to or higher than 0.5 g/cm^3 ; and equal to or higher than 0.53 g/cm^3 .

106. The arrangement of claim 86, wherein the press arrangement operates a web speed of greater than 1000 m/min .

107. The arrangement of claim 86, wherein a permeability of the at least one second fabric is one of: lower than approximately 80 cfm ; lower than approximately 40 cfm ; and equal to or lower than approximately 25 cfm .

108. The arrangement of claim 86, wherein a permeability of the at least one second fabric is lower than a permeability of the at least one first fabric.

109. The arrangement of claim 86, wherein a compressibility of the at least one second fabric is greater than a compressibility of the at least one first fabric.

110. The arrangement of claim 86, wherein the support surface generally flat or generally planar.

111. The arrangement of claim 86, wherein the support surface comprises a curved surface of a suction roll or cylinder.

P25760.S04

112. The arrangement of claim 111, wherein the curved surface of the suction roll or cylinder comprises one of a diameter of approximately 1 m or more and a diameter of approximately 1.2 m or more.

113. The arrangement of claim 111, wherein the suction roll or cylinder comprises at least one suction zone.

114. The arrangement of claim 86, wherein the mechanical pressure is produced by at least one of tensioning of the pressure producing element and compressing exerted by the pressure producing element.

115. The arrangement of claim 86, wherein the pressure producing element comprises an impermeable belt.

116. The arrangement of claim 86, wherein the pressure producing element comprises a permeable belt.

117. The arrangement of claim 86, wherein the pressure producing element comprises one of a press shoe and a perforated press shoe.

118. The arrangement of claim 86, wherein the pressure producing element comprises a press roll.

119. The arrangement of claim 86, wherein the pressure producing element comprises a permeable belt having an open area which comprises one of: at least approximately 25%; greater than approximately 35%; greater than approximately 50%.

P25760.S04

120. The arrangement of claim 86, wherein the pressure producing element comprises a permeable belt having a contact area which comprises one of: at least approximately 10%; at least approximately 25%; and between approximately 15% and approximately 55%.

121. The arrangement of claim 86, wherein the pressure producing element comprises a permeable belt having a tension which comprises one of: more than approximately 30 KN/m; and more than approximately 50 KN/m.

122. The arrangement of claim 86, wherein the differential pressure is one of: greater than approximately 0.3 bars; equal to or greater than approximately 1 bar; and approximately 1.5 bar.

123. The arrangement of claim 86, wherein the pressure producing element comprises a permeable belt which comprises one of a reinforced plastic or synthetic material belt and a spiral linked fabric.

124. The arrangement of claim 86, further comprising a device for producing an overpressure above the pressure producing element.

125. The arrangement of claim 86, further comprising a device for producing hot air or steam above the pressure producing element.

126. The arrangement of claim 86, wherein at least one of the at least one second fabric and the at least one first fabric is heated.

P25760.S04

127. The arrangement of claim 86, wherein the paper web leaves the press arrangement with a moisture content of approximately 35% or less.

128. The arrangement of claim 86, wherein the paper web leaves the press arrangement with a dryness level of between approximately 30 to approximately 40%.

129. The arrangement of claim 86, wherein a dynamic stiffness K^* [N/mm] of the at least one second fabric greater than or equal to 3,000 N/mm and less than a dynamic stiffness K^* [N/mm] of the at least one first fabric.

130. A method of drying a paper web in a press arrangement of claim 86, the method comprising:

moving the paper web, disposed between the at least one first and second fabrics, between the support surface and the pressure producing element; and

moving a fluid through the paper web, the at least one first and second fabrics, and the support surface.

131. A belt press for a paper machine, the belt press comprising:

a vacuum roll comprising an exterior surface and at least one suction zone;

a permeable belt comprising a first side and being guided over a portion of said exterior surface of said vacuum roll;

said permeable belt having a tension of at least approximately 30 KN/m; and

said first side having an open area of at least approximately 25% a contact area of at least approximately 10%.

P25760.S04

132. The belt press of claim 131, wherein said at least one suction zone comprises a circumferential length of between approximately 200 mm and approximately 2,500 mm.

133. The belt press of claim 132, wherein said circumferential length defines an arc of between approximately 80 degrees and approximately 180 degrees.

134. The belt press of claim 133, wherein said circumferential length defines an arc of between approximately 80 degrees and approximately 130 degrees.

135. The belt press of claim 131, wherein said at least one suction zone is adapted to apply vacuum for a dwell time which is equal to or greater than approximately 40 ms.

136. The belt press of claim 135, wherein said dwell time is equal to or greater than approximately 50 ms.

137. The belt press of claim 131, wherein said permeable belt exerts a pressing force on said vacuum roll for a first dwell time which is equal to or greater than approximately 40 ms.

138. The belt press of claim 137, wherein said at least one suction zone is adapted to apply vacuum for a second dwell time which is equal to or greater than approximately 40 ms.

139. The belt press of claim 138, wherein said second dwell time is equal to or greater than approximately 50 ms.

P25760.S04

140. The belt press of claim 139, wherein said first dwell time is equal to or greater than approximately 50 ms.

141. The belt press of claim 131, wherein said permeable belt comprises at least one spiral link fabric.

142. The belt press of claim 141, wherein said at least one spiral link fabric comprises a synthetic material.

143. The belt press of claim 141, wherein said at least one spiral link fabric comprises stainless steel.

144. The belt press of claim 141, wherein said at least one spiral link fabric comprises a tension which is between approximately 30 KN/m and approximately 80 KN/m.

145. The belt press of claim 144, wherein said tension is between approximately 35 KN/m and approximately 70 KN/m.

146. A method of pressing and drying a paper web, the method comprising:
pressing, with a pressure producing element, the paper web between at least one first fabric and at least one second fabric; and
simultaneously moving a fluid through the paper web and the at least one first and second fabrics.

147. The method of claim 146, wherein said pressing occurs for a dwell time which is equal to or greater than approximately 40 ms.

P25760.S04

148. The method of claim 147, wherein said dwell time is equal to or greater than approximately 50 ms.

149. The method of claim 146, wherein said simultaneously moving occurs for a dwell time which is equal to or greater than approximately 40 ms.

150. The method of claim 149, wherein said dwell time is equal to or greater than approximately 50 ms.

151. The method of claim 146, wherein said pressure producing element comprises a device which applied a vacuum.

152. The method of claim 151, wherein said vacuum is greater than approximately 0.5 bar.

153. The method of claim 152, wherein said vacuum is greater than approximately 1 bar.

154. The method of claim 153, wherein said vacuum is greater than approximately 1.5 bar.

P25760.S04

ABSTRACT OF THE DISCLOSURE

A permeable belt, a belt press including a roll having an exterior surface and the permeable belt, and a method of drying or pressing a web with the permeable belt. The permeable belt can be tensioned to at least 30 KN/m. A side of the permeable belt has an open area of at least approximately 25% and a contact area of at least approximately 25%. This Abstract is not intended to define the invention disclosed in the specification, nor intended to limit the scope of the invention in any way.

Declaration and Power of Attorney For Utility or Design Patent ApplicationErklärung für Patentanmeldungen zur Gebrauchseignung und Entwicklung
mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides
Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staats-
angehörigkeit den im nachstehenden nach meinem Namen
aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der
ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein
Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder
(falls nachstehend mehrere Namen aufgeführt sind) des
Gegenstandes bin, für den dieser Antrag gestellt wird und für den
ein Patent für die Erfindung mit folgendem Titel beantragt wird:
RESSENPARTIE UND DURCHLAESSIGES BAND IN EINER
APIERMASCHINE

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle
zutreffendes bitte ankreuzen), diese Erfindung☐ wurde angemeldet am _____
unter der US-Anmeldenummer _____
und wurde am _____ abgeändert (falls zutreffend)
oderunter der PCT internationalen Anmeldungsnummer _____
und wurde am _____ abgeändert (falls zutreffend).Ich bestätige hiermit, daß ich den Inhalt der oben angegebene Paten-
anmeldung, einschließlich der Ansprüche, die eventuell durch einen
oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und
verstanden habe.Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen
an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37,
Code of Federal Regulations, § 1.56 von Belang sind.Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title
35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten
Auslandsanmeldungen für Patente oder Erfinderurkunden, oder §
365(a) aller PCT internationalen Anmeldungen, welche wenigstens
ein Land ausser den Vereingten Staaten von Amerika benennen, und
habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen
für Patente bzw. Erfinderurkunden oder PCT internationale
Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung,
für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications

Frühere ausländische Anmeldungen

Number) _____ (Country) _____
Nummer) _____ (Land) _____Number) _____ (Country) _____
Nummer) _____ (Land) _____(Day/Month/Year Filed) _____
(Tag/Monat/Jahr der Anmeldung) _____(Day/Month/Year Filed) _____
(Tag/Monat/Jahr der Anmeldung) _____☐ Zusätzliche einstweilige Anmeldungsnummern sind im
Prioritätsanhang aufgeführt.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.I believe I am the original, first and sole inventor (if only one
name is listed below) or an original, first and joint inventor (if
plural names are listed below) of the subject matter which is
claimed and for which a patent is sought on the invention entitledPRESS SECTION AND PERMEABLE BELT IN PAPER
MACHINEthe specification of which is attached hereto unless the following
box is checked:☐ was filed on _____ as
United States Application Number _____
and was amended on _____ (if applicable)
or,PCT International Application Number _____
and was amended on _____ (if applicable).I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.I acknowledge the duty to disclose information which is material
to patentability as defined in Title 37, Code of Federal
Regulations, § 1.56.I hereby claim foreign priority under Title 35, United States Code
§ 119 (a-d) or § 365(b) of any foreign application(s) for patent or
inventor's certificate, or § 365(a) of any PCT international
application which designated at least one country other than the
United States, listed below. I have also identified below, by
checking the "No" box, any foreign application for patent or
inventor's certificate, or of any PCT international application
having a filing date before that of the application on which
priority is claimed:Priority Claimed
Prioritätsanspruch

<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

☐ Additional foreign application numbers are listed
on a supplemental priority sheet attached hereto.

German Language Utility or Design Patent Application Declaration

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Number)
Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

Application Number)
Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

Application Number)
Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

☐ Zusätzliche einstweilige Anmelde-nummern sind im ergänzenden Prioritätsanhang aufgeführt.

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

☐ Zusätzliche USA oder internationale Anmelde-nummern sind im ergänzenden Prioritätsanhang aufgeführt.

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachte Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines auf Grund deren erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Hiermit bevollmächtigt der Unterzeichnete den hierin genannten entweder USA-Anwalt oder Stellvertreter, in der Abwesenheit einer direkten Verständigung zwischen den USA-Anwalt oder Stellvertreter und dem Unterzeichneten Anweisungen, die der der Anmeldung betreffend dem Patent und Warenzeichen Amt zugestellt werden, von entweder seinem ausländischen Patentvertreter oder Stellvertreter der Gesellschaft anzunehmen und auszuführen. Sollte sich das Personal ändern, von dem Anweisungen angenommen werden mögen, dann wird der hierin genannte USA-Anwalt oder Stellvertreter entsprechend von dem Unterzeichneten benachrichtigt.

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

German Language Utility or Design Patent Application Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den sich mit der Kundennummer befassenden Patentanwalt (Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent-und Warenzeichenamt und weise an, dass alle Korrespondenz mit dieser Kundennummer adressiert wird.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

KUNDENNUMMER 7055

Die ernannten Patenanwälte sind zur Zeit:

Neil F. Greenblum	Reg. No. 28,394
Bruce H. Bernstein	Reg. No. 29,027
Arnold Turk	Reg. No. 33,094
James L. Rowland	Reg. No. 32,674
Robert W. Mueller	Reg. No. 35,043

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Stephen M. Roylance	Reg. No. 31,296
Leslie J. Paperner	Reg. No. 33,329
William Pieprz	Reg. No. 33,630
William E. Lyddane	Reg. No. 41,568

Address: **Greenblum & Bernstein, P.L.C.**
1950 Roland Clarke Place
Reston, VA 20191

Telefongespräche bitte richten an:

Direct Telephone Calls to:

Greenblum & Bernstein, P.L.C.
(703) 716-1191

Vor-und Nachname des einzigen oder ersten Erfinders:
Jeffrey HERMAN

Full name of sole or first inventor
Jeffrey HERMAN

Unterschrift des Erfinders Datum

Inventor's signature Date

Wohnsitz
Pennsylvania, U.S.A.

Residence
Pennsylvania, U.S.A.

Staatsangehörigkeit
U.S.A.

Citizenship
U.S.A.

Postanschrift
42 Derwen Road, 19004 Bala Cynwyd, Pennsylvania, U.S.A.

Post Office Address
42 Derwen Road, 19004 Bala Cynwyd, Pennsylvania, U.S.A.

Vor-und Nachname des zweiten Miterfinders (falls zutreffend)
Thomas Thoröe SCHERB

Full name of second joint inventor, if any
Thomas Thoroee SCHERB

Unterschrift des zweiten Erfinders Datum

Second Inventor's Signature Date

Wohnsitz
Sao Paulo, Brazil

Residence
Sao Paulo, Brazil

Staatsangehörigkeit
Brazil

Citizenship
Brazil

Postanschrift
R. Nilza de Medeiros Martins, 200, ap. 81, bl 6, Jd. Colombo, CEP 05629010, Sao Paulo, Brazil

Post Office Address
R. Nilza de Medeiros Martins, 200, ap. 81, bl 6, Jd. Colombo, CEP 05629010, Sao Paulo, Brazil

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

German Language Utility or Design Patent Application Declaration

Vor-und Nachname des dritten Miterfinders: Luiz Carlos SILVA	Full name of third inventor, if any Luiz Carlos SILVA
Unterschrift des dritten Erfinders Datum	Third Inventor's signature Date
Wohnsitz Campo Limpo, Brazil	Residence Campo Limpo, Brazil
Staatsangehörigkeit Brazil	Citizenship Brazil
Postanschrift Rua Victory Savoia 46, Vila Tavares, 13230-000 Campo Limpo, Brazil	Post Office Address Rua Victory Savoia 46, Vila Tavares, 13230-000 Campo Limpo, Brazil
Vor-und Nachname des vierten Miterfinders (falls zutreffend) Hubert WALKENHAUS	Full name of fourth inventor, if any Hubert WALKENHAUS
Unterschrift des vierten Erfinders Datum	Fourth Inventor's Signature Date
Wohnsitz Kerpen, Deutschland	Residence Kerpen, Germany
Staatsangehörigkeit Deutschland	Citizenship Germany
Postanschrift Nachtigallenweg 38, 50169 Kerpen, Deutschland	Post Office Address Nachtigallenweg 38, 50169 Kerpen, Germany
Vor-und Nachname des fünften Miterfinders (falls zutreffend)	Full name of fifth inventor, if any
Unterschrift des fünften Erfinders Datum	Fifth Inventor's Signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address
Vor-und Nachname des sechsten Miterfinders (falls zutreffend)	Full name of sixth inventor, if any
Unterschrift des sechsten Erfinders Datum	Sixth Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address
(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).	(Supply similar information and signature for seventh and subsequent joint inventors).

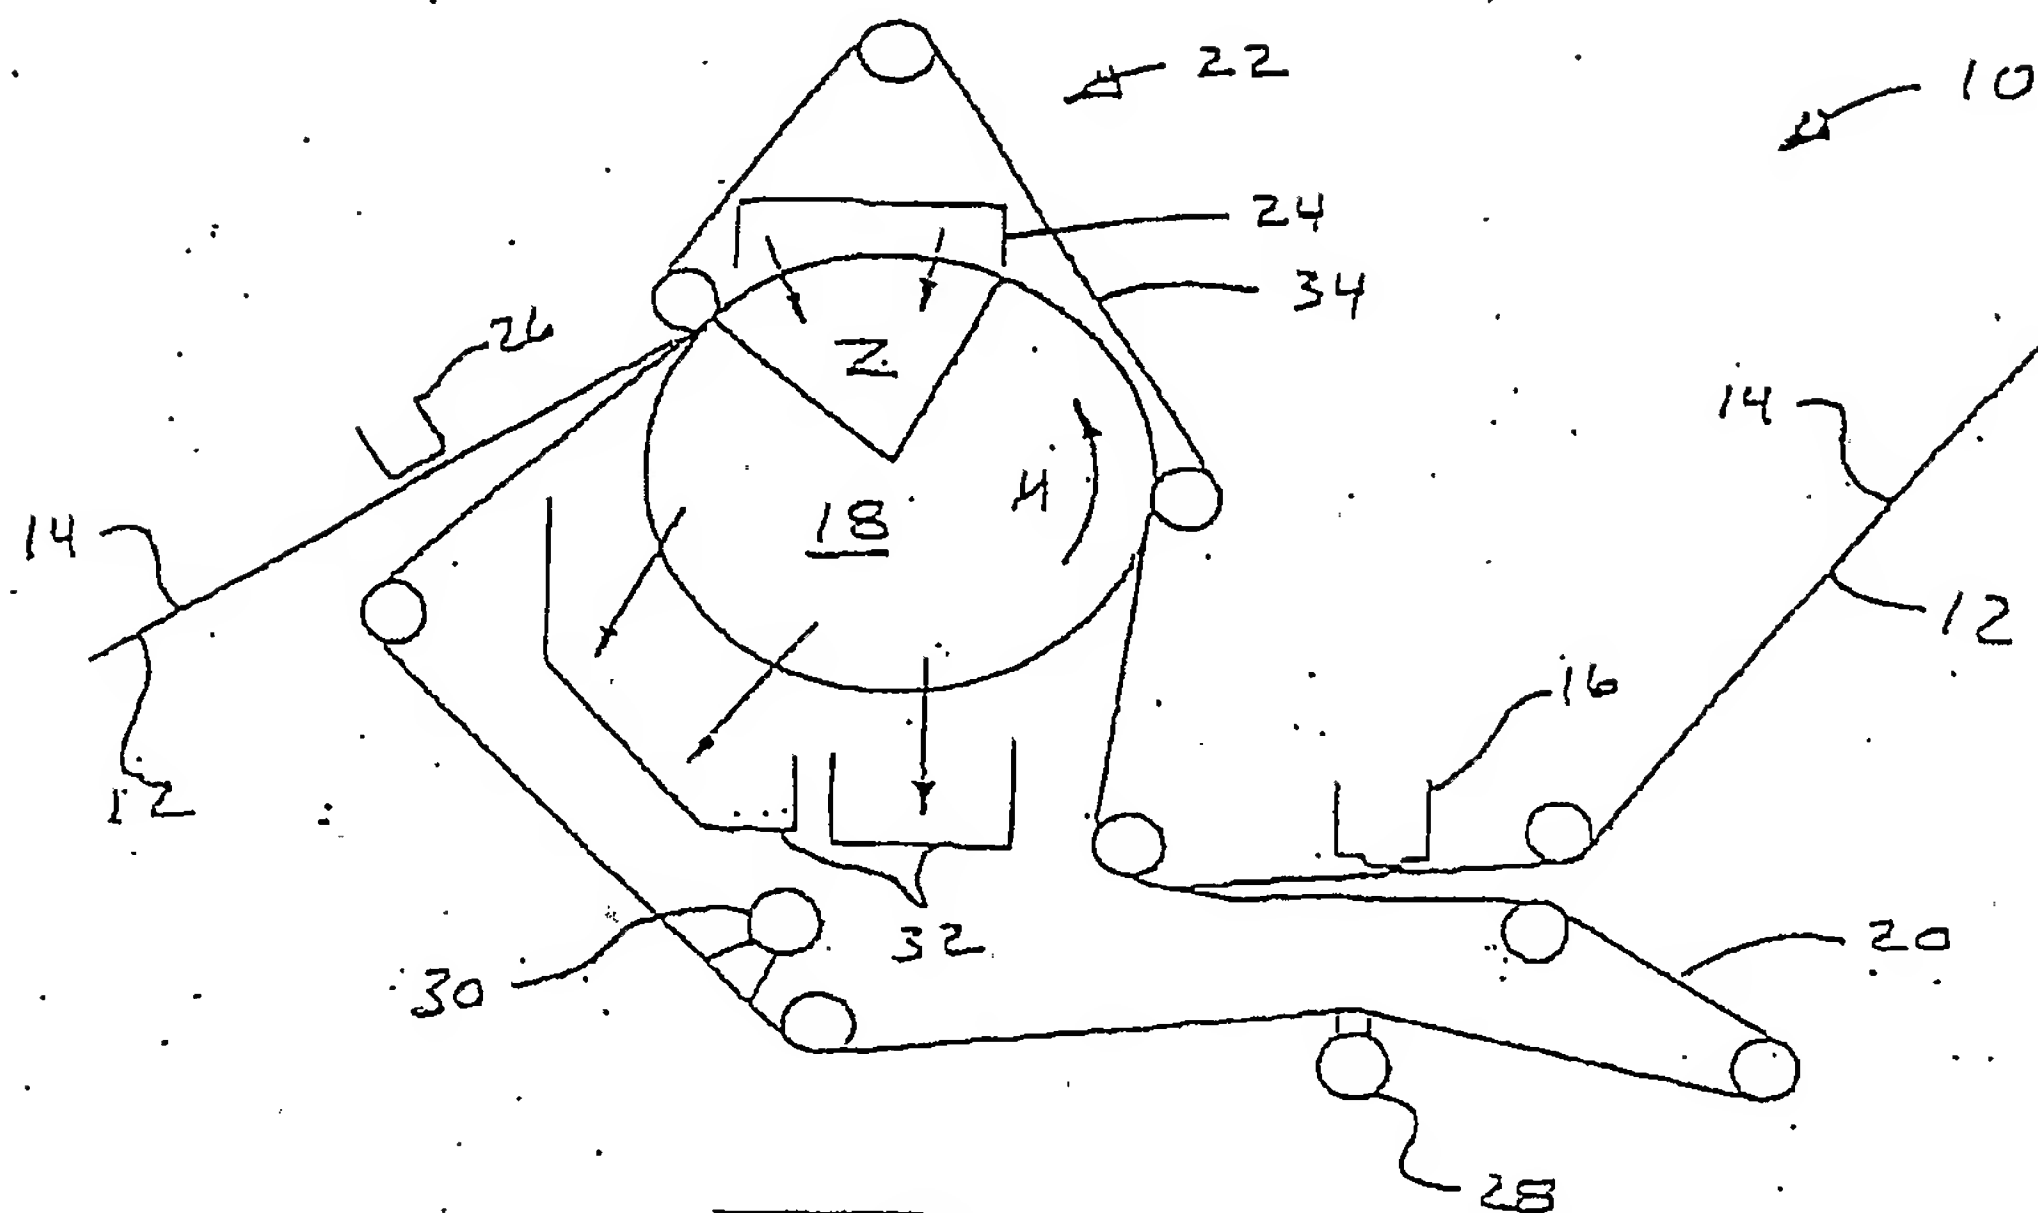


Fig. 1

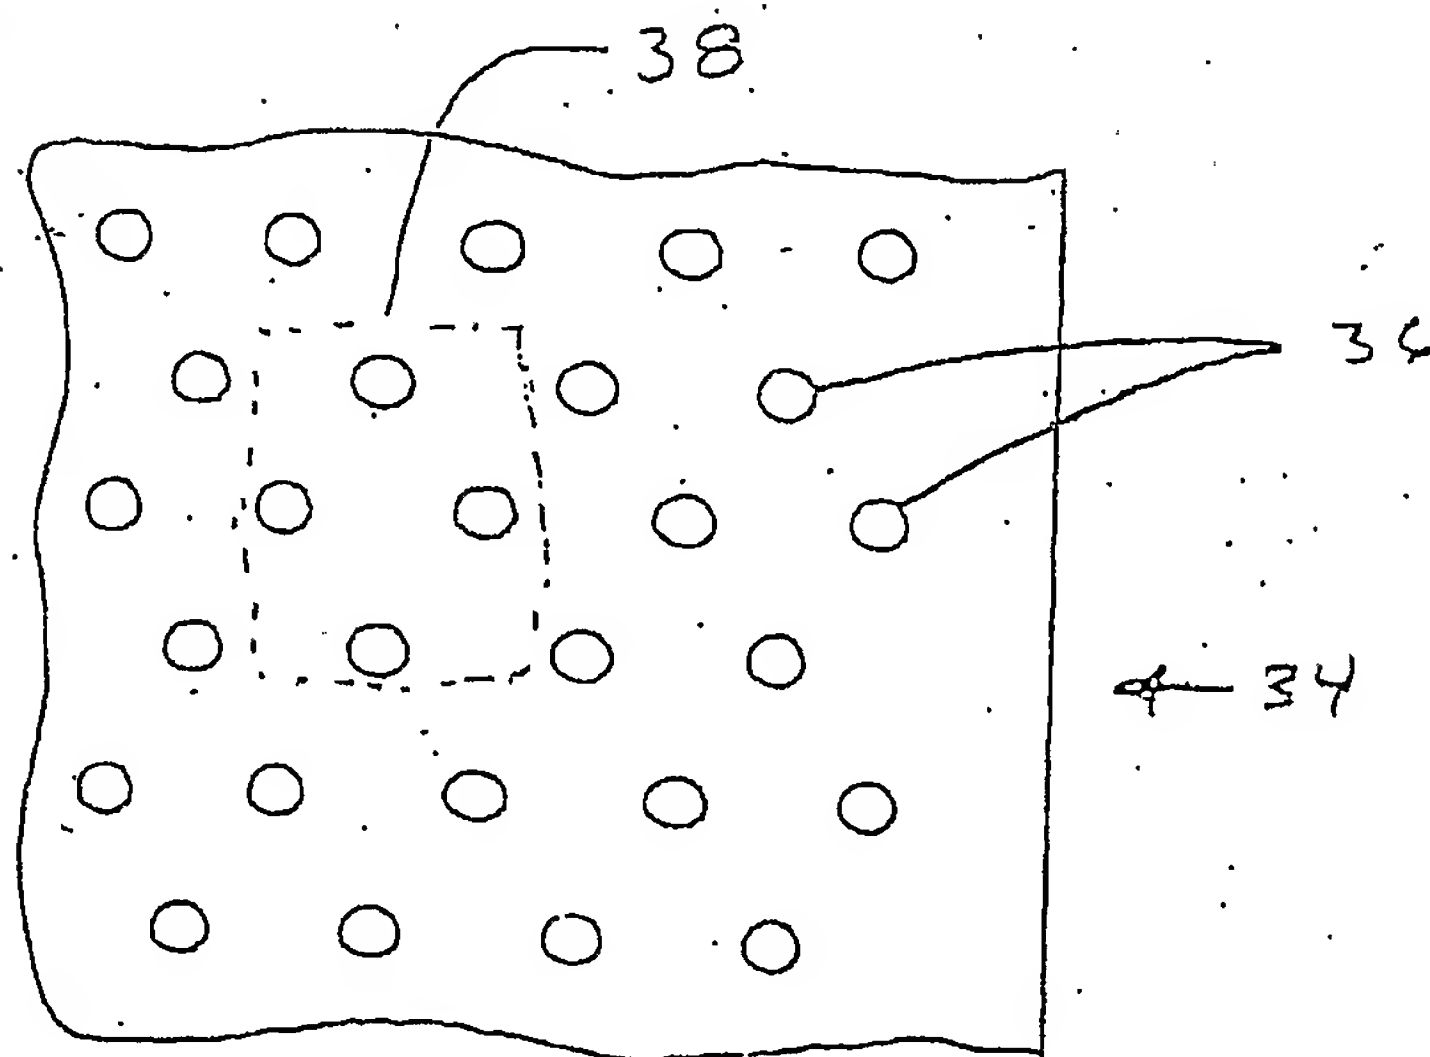


Fig. 2

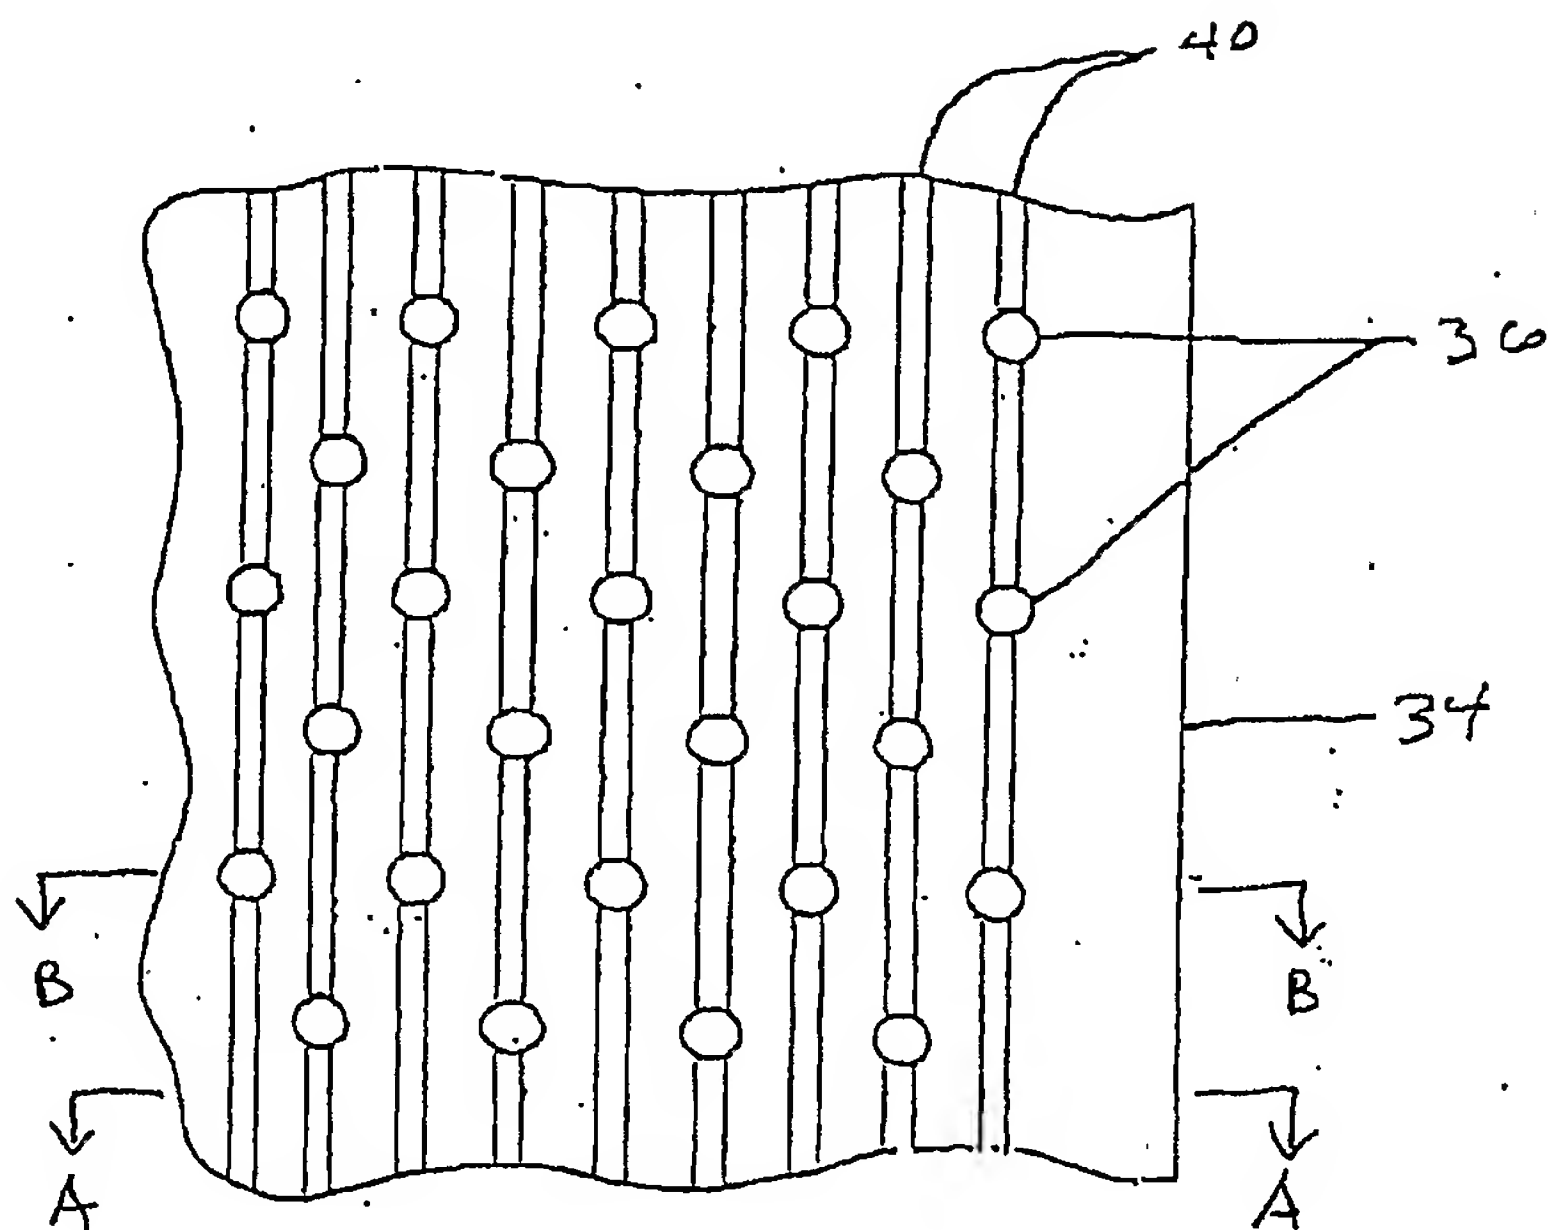


Fig. 3

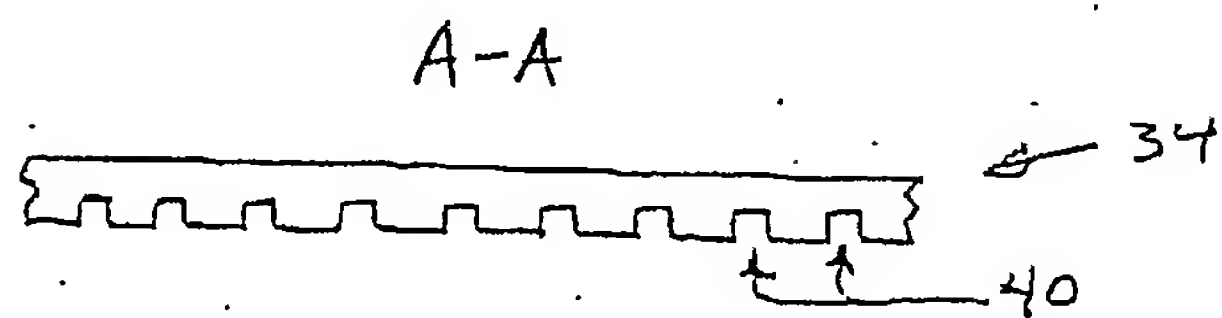


Fig. 4

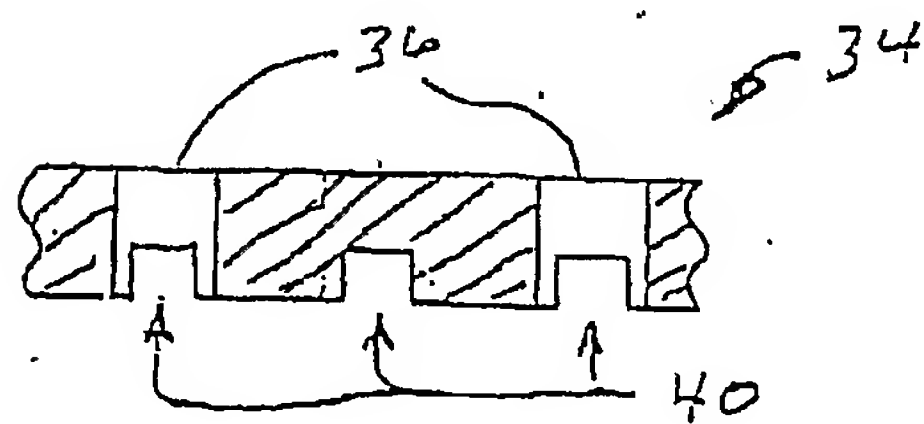


Fig. 5

B-B

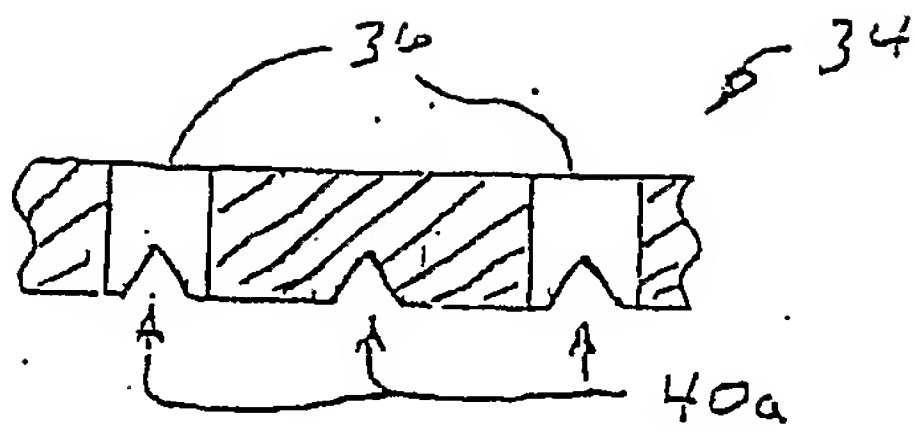


FIG - 5a

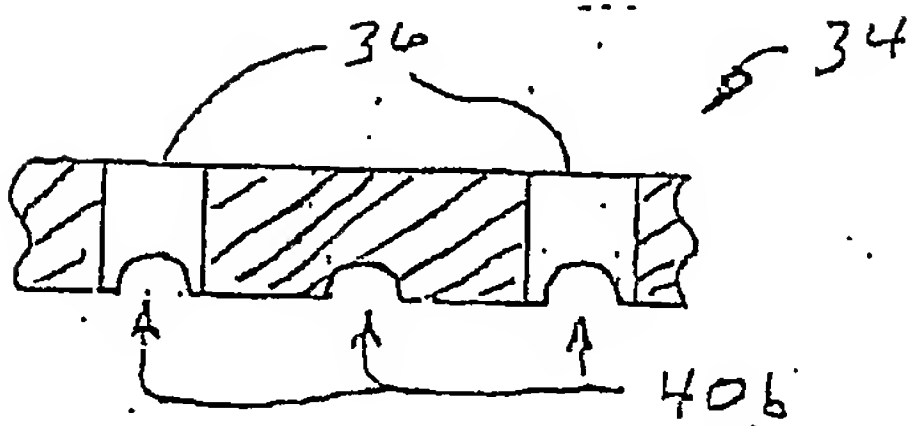


FIG - 5b

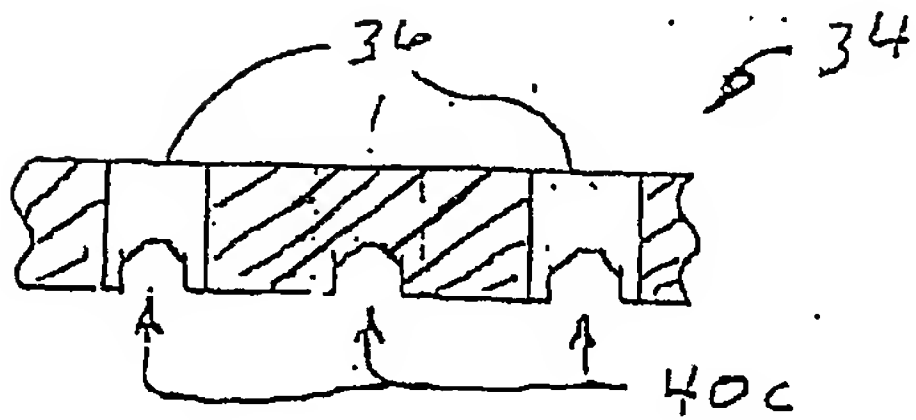


FIG - 5c

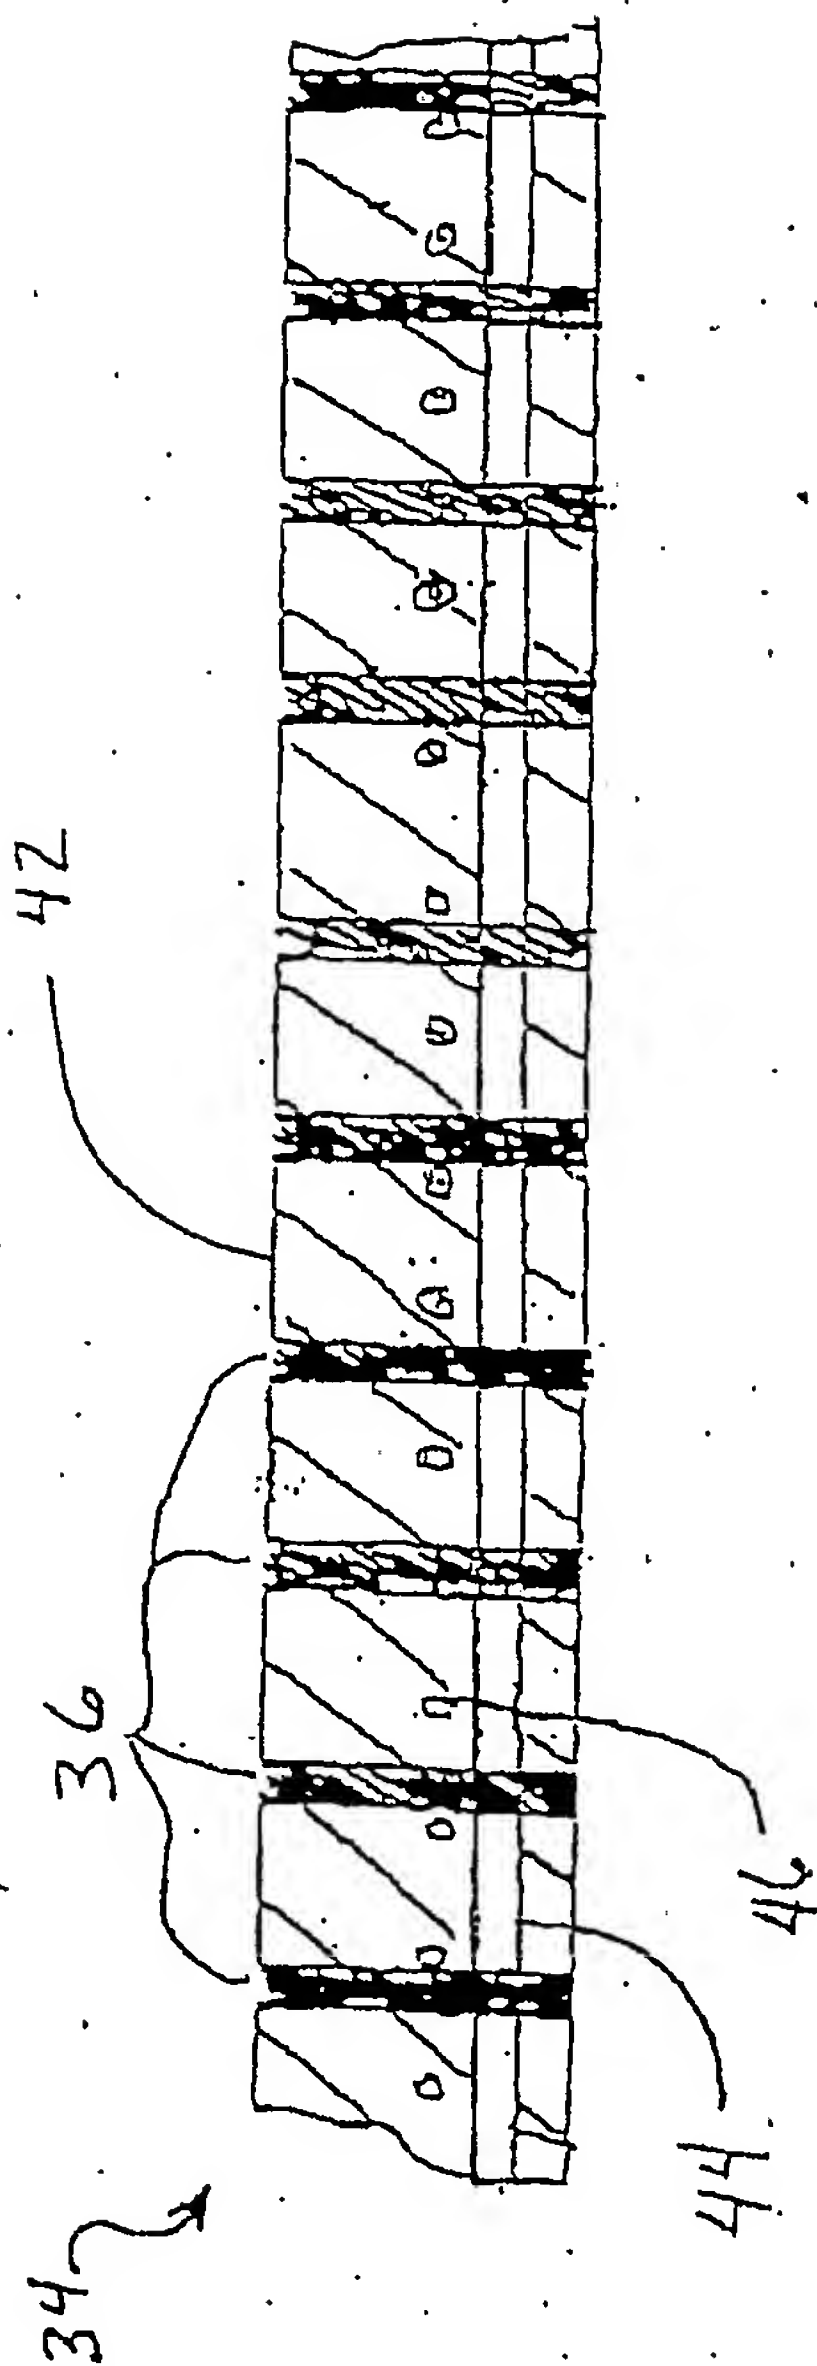


Fig. 6

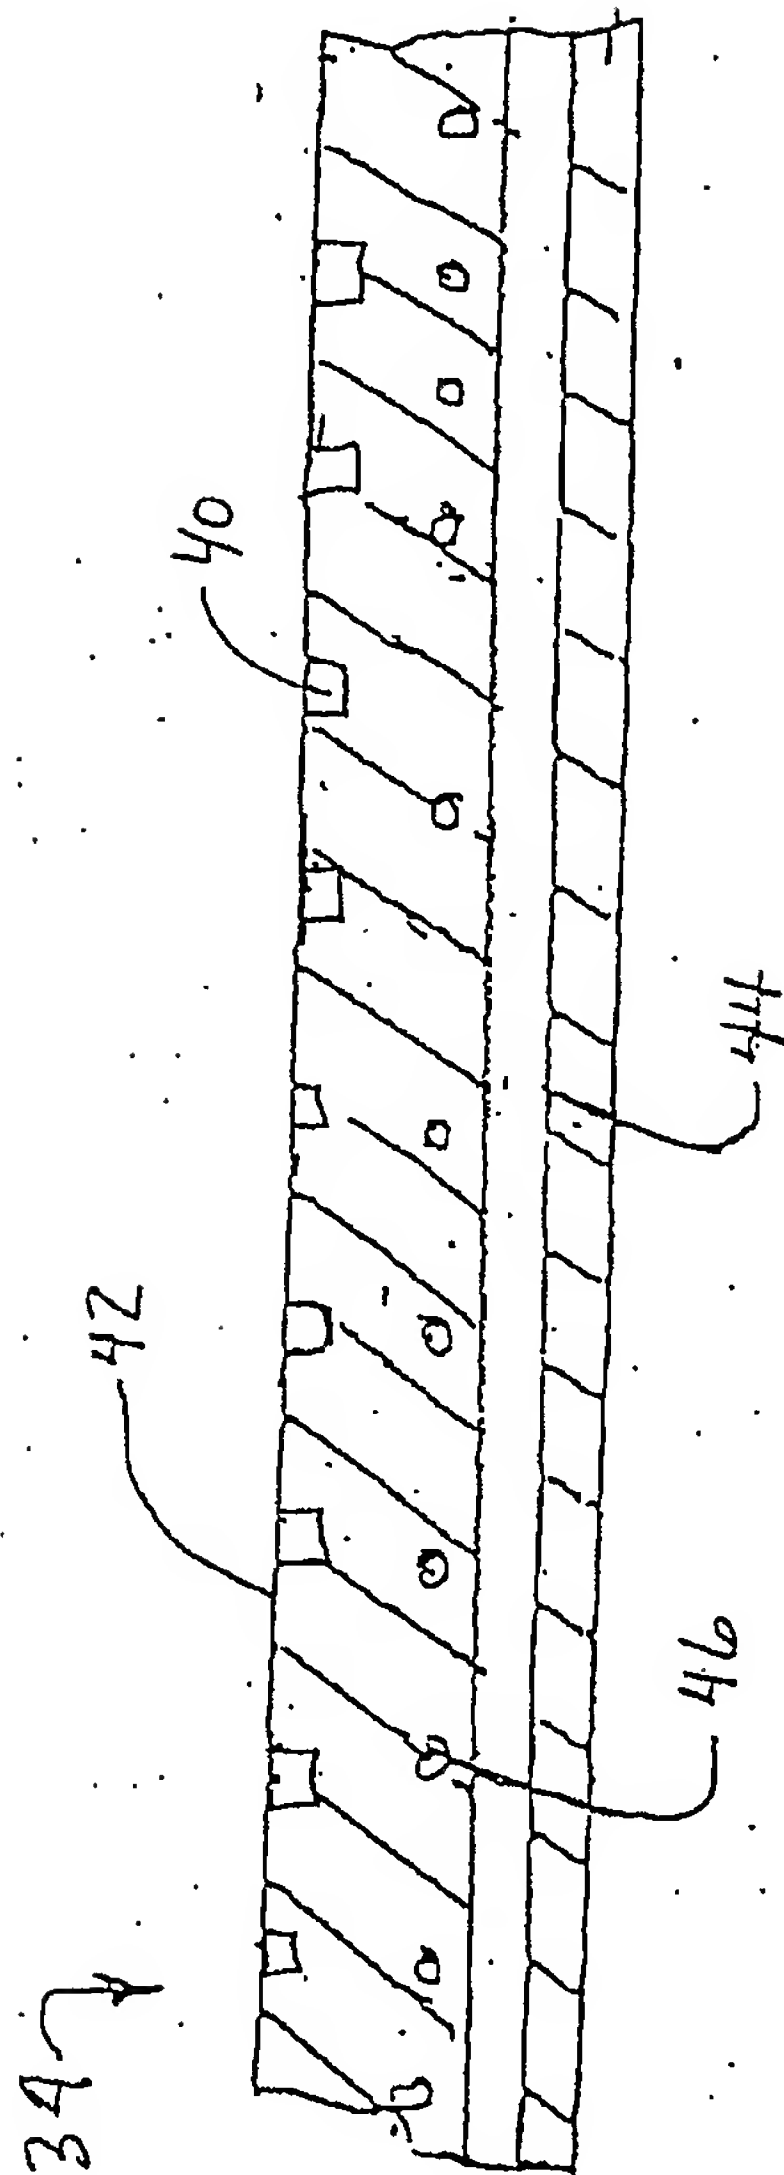


Fig. 7

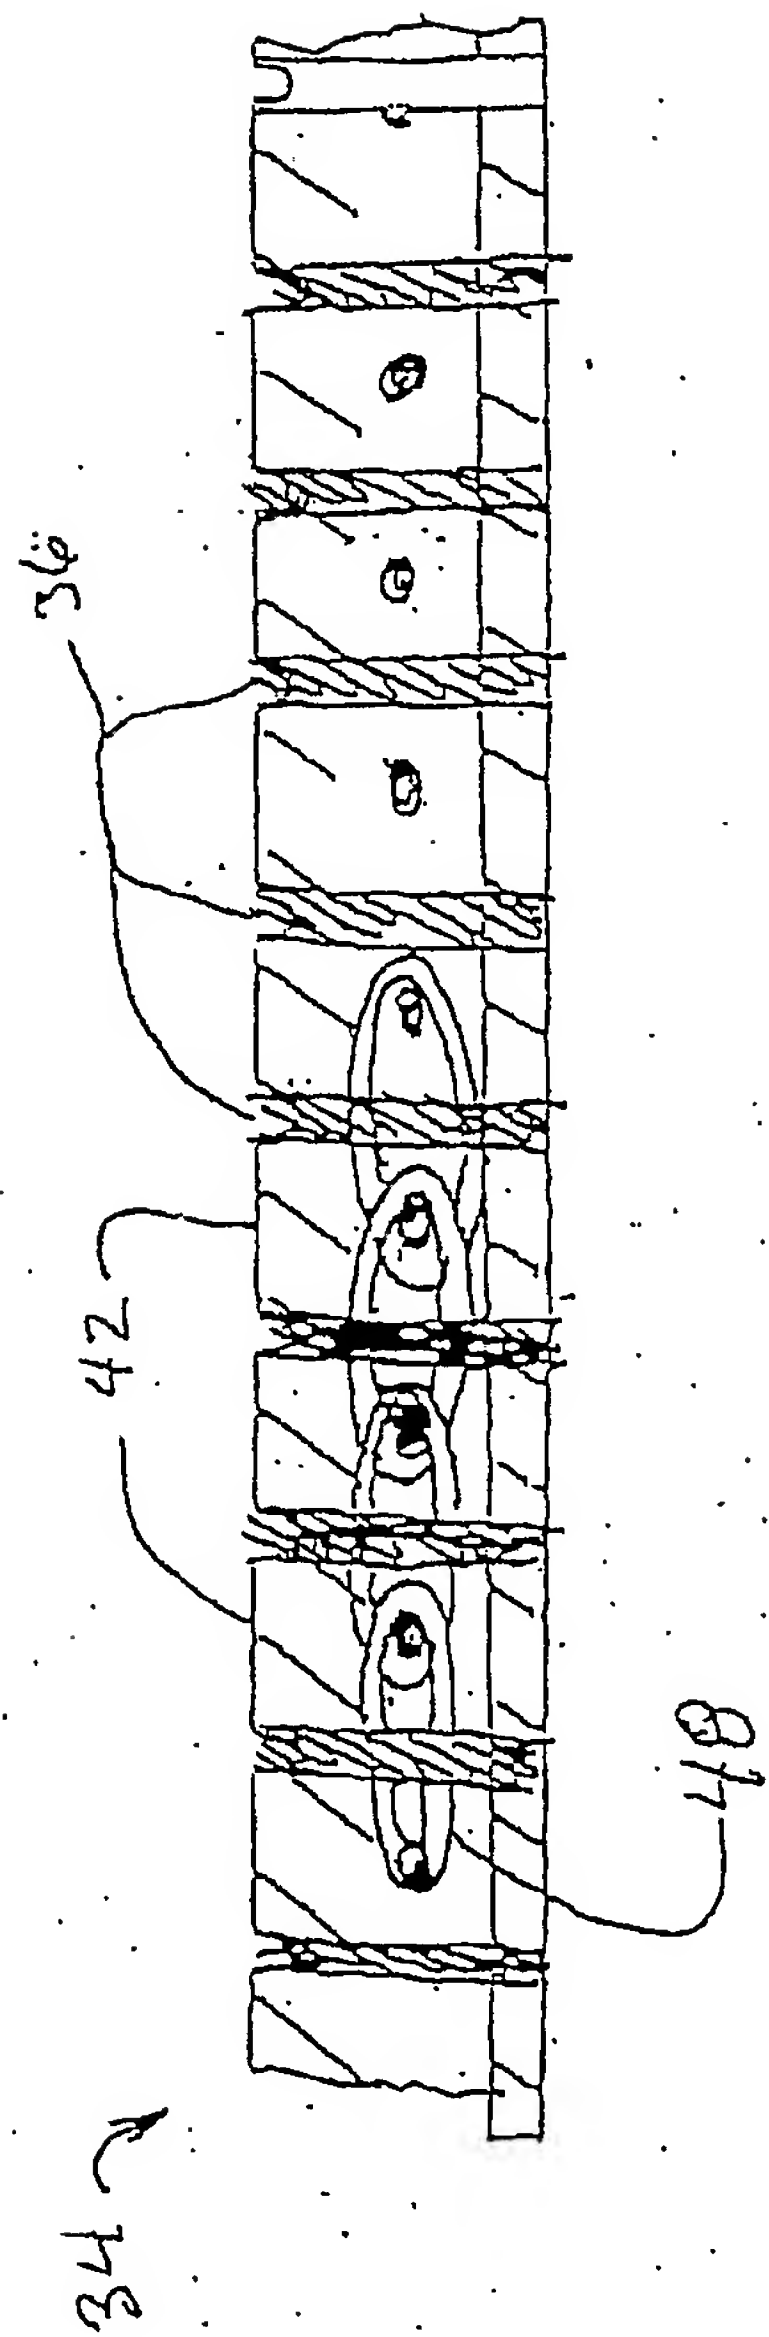


Fig. 8

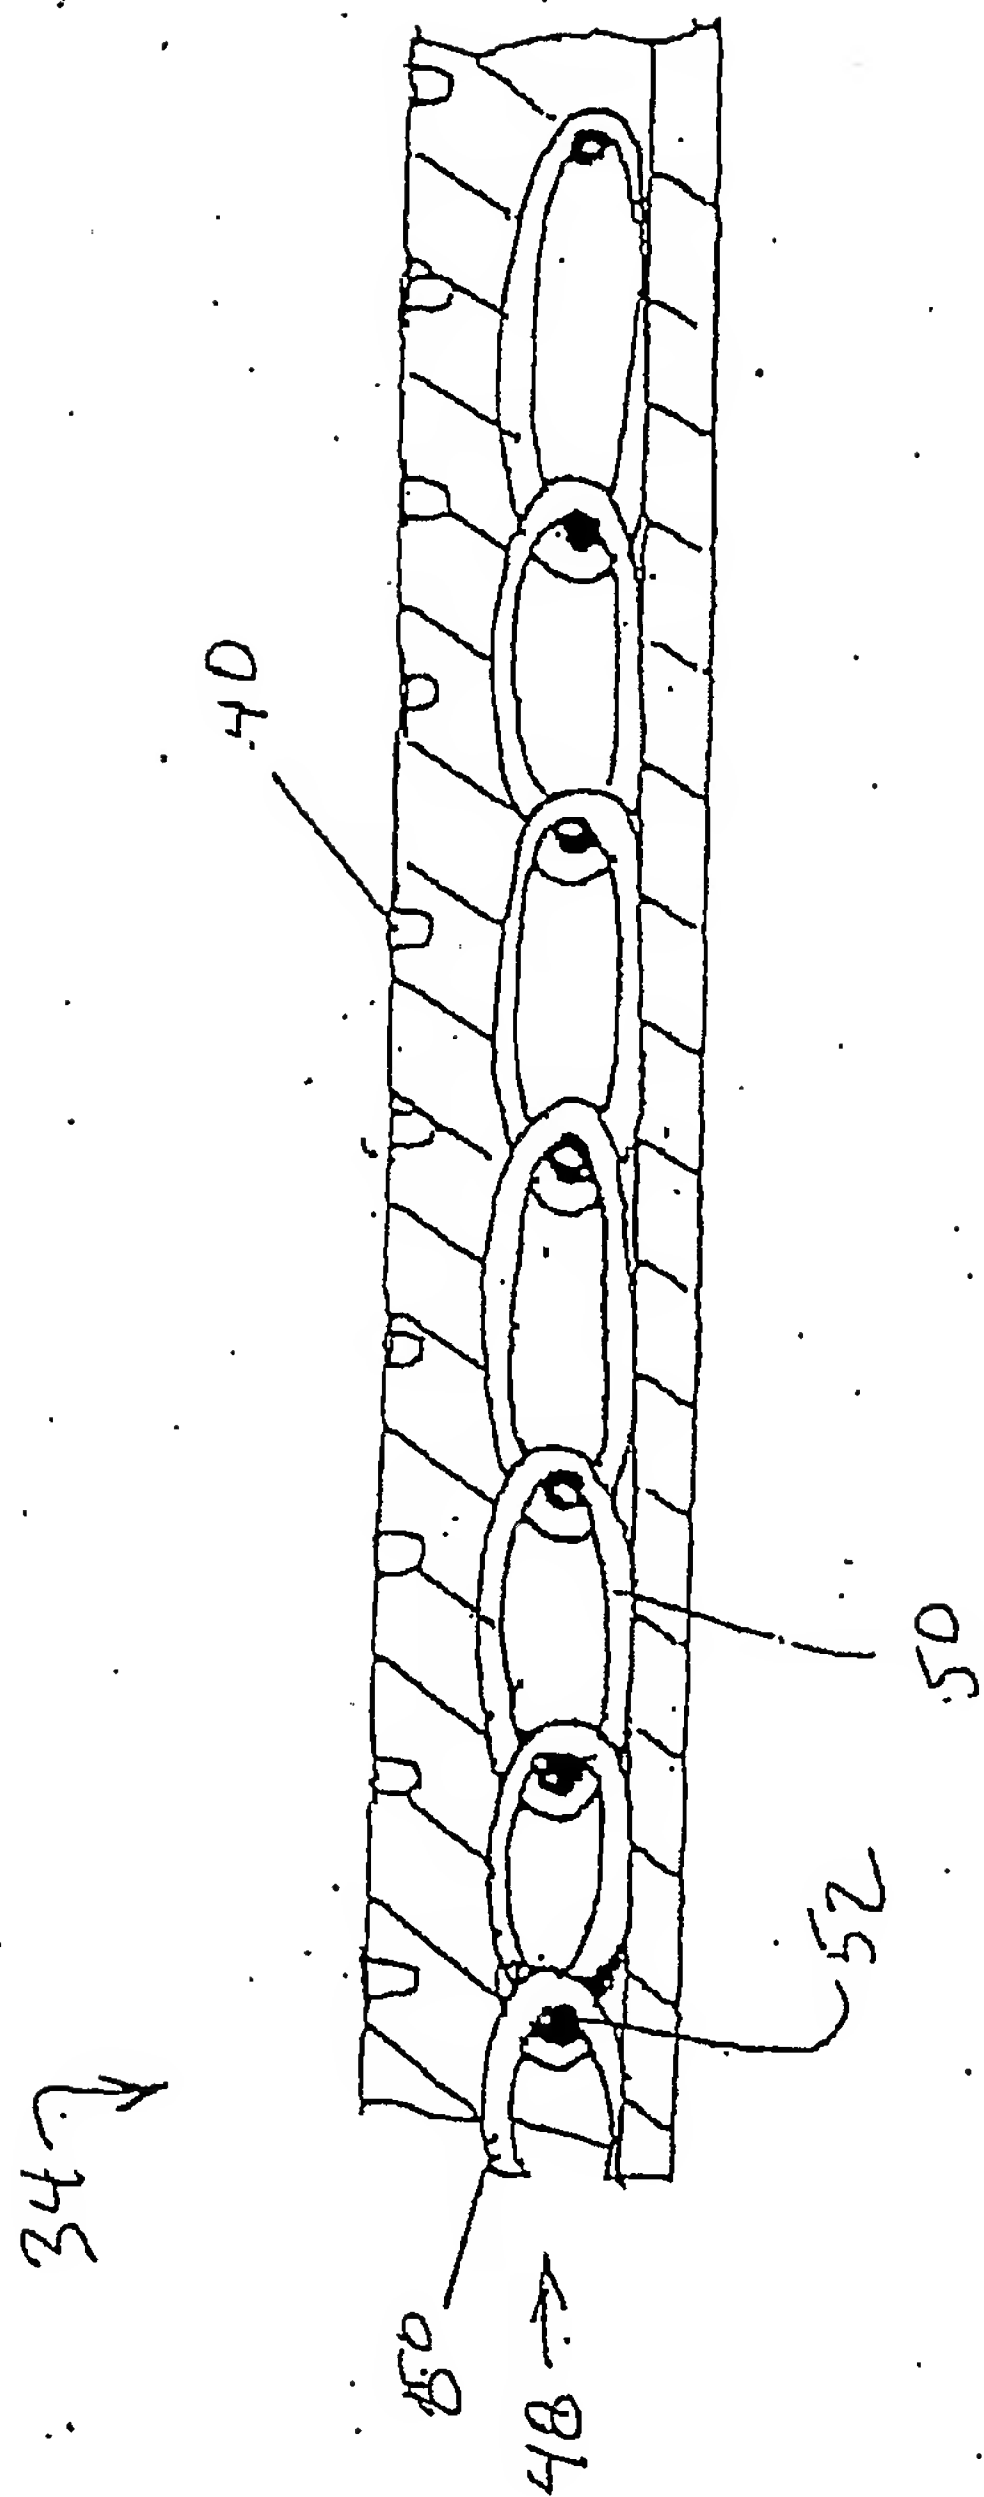


Fig. 9

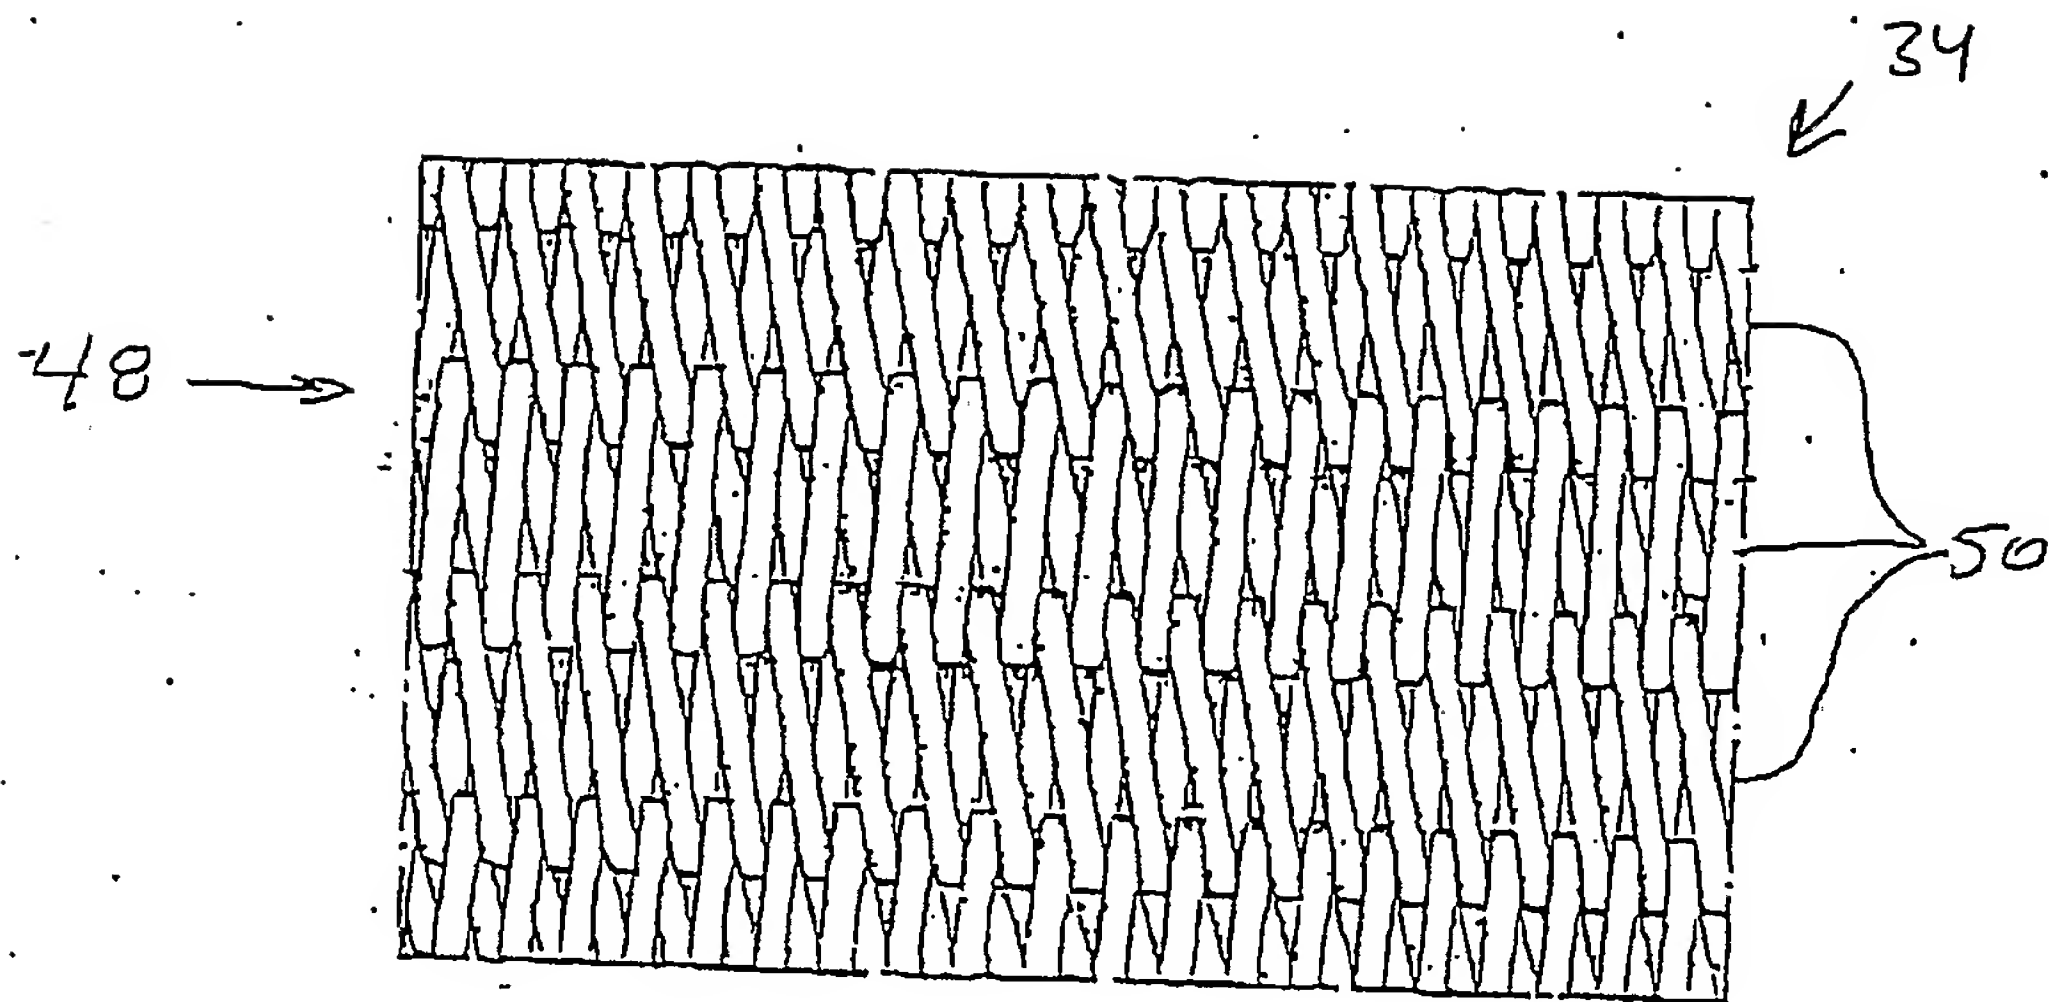


Fig. 10

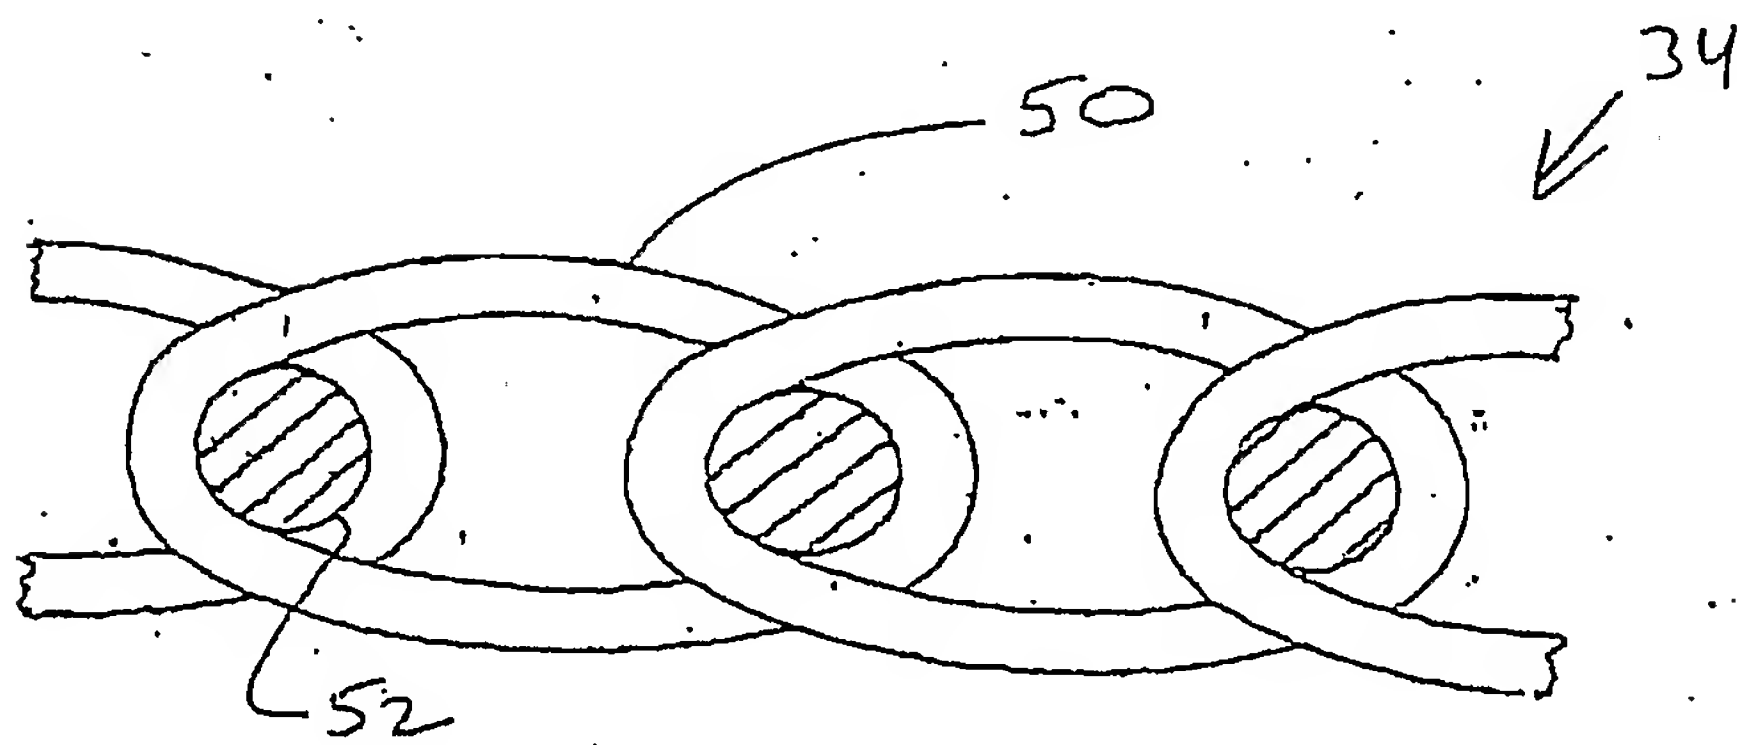


Fig. 11

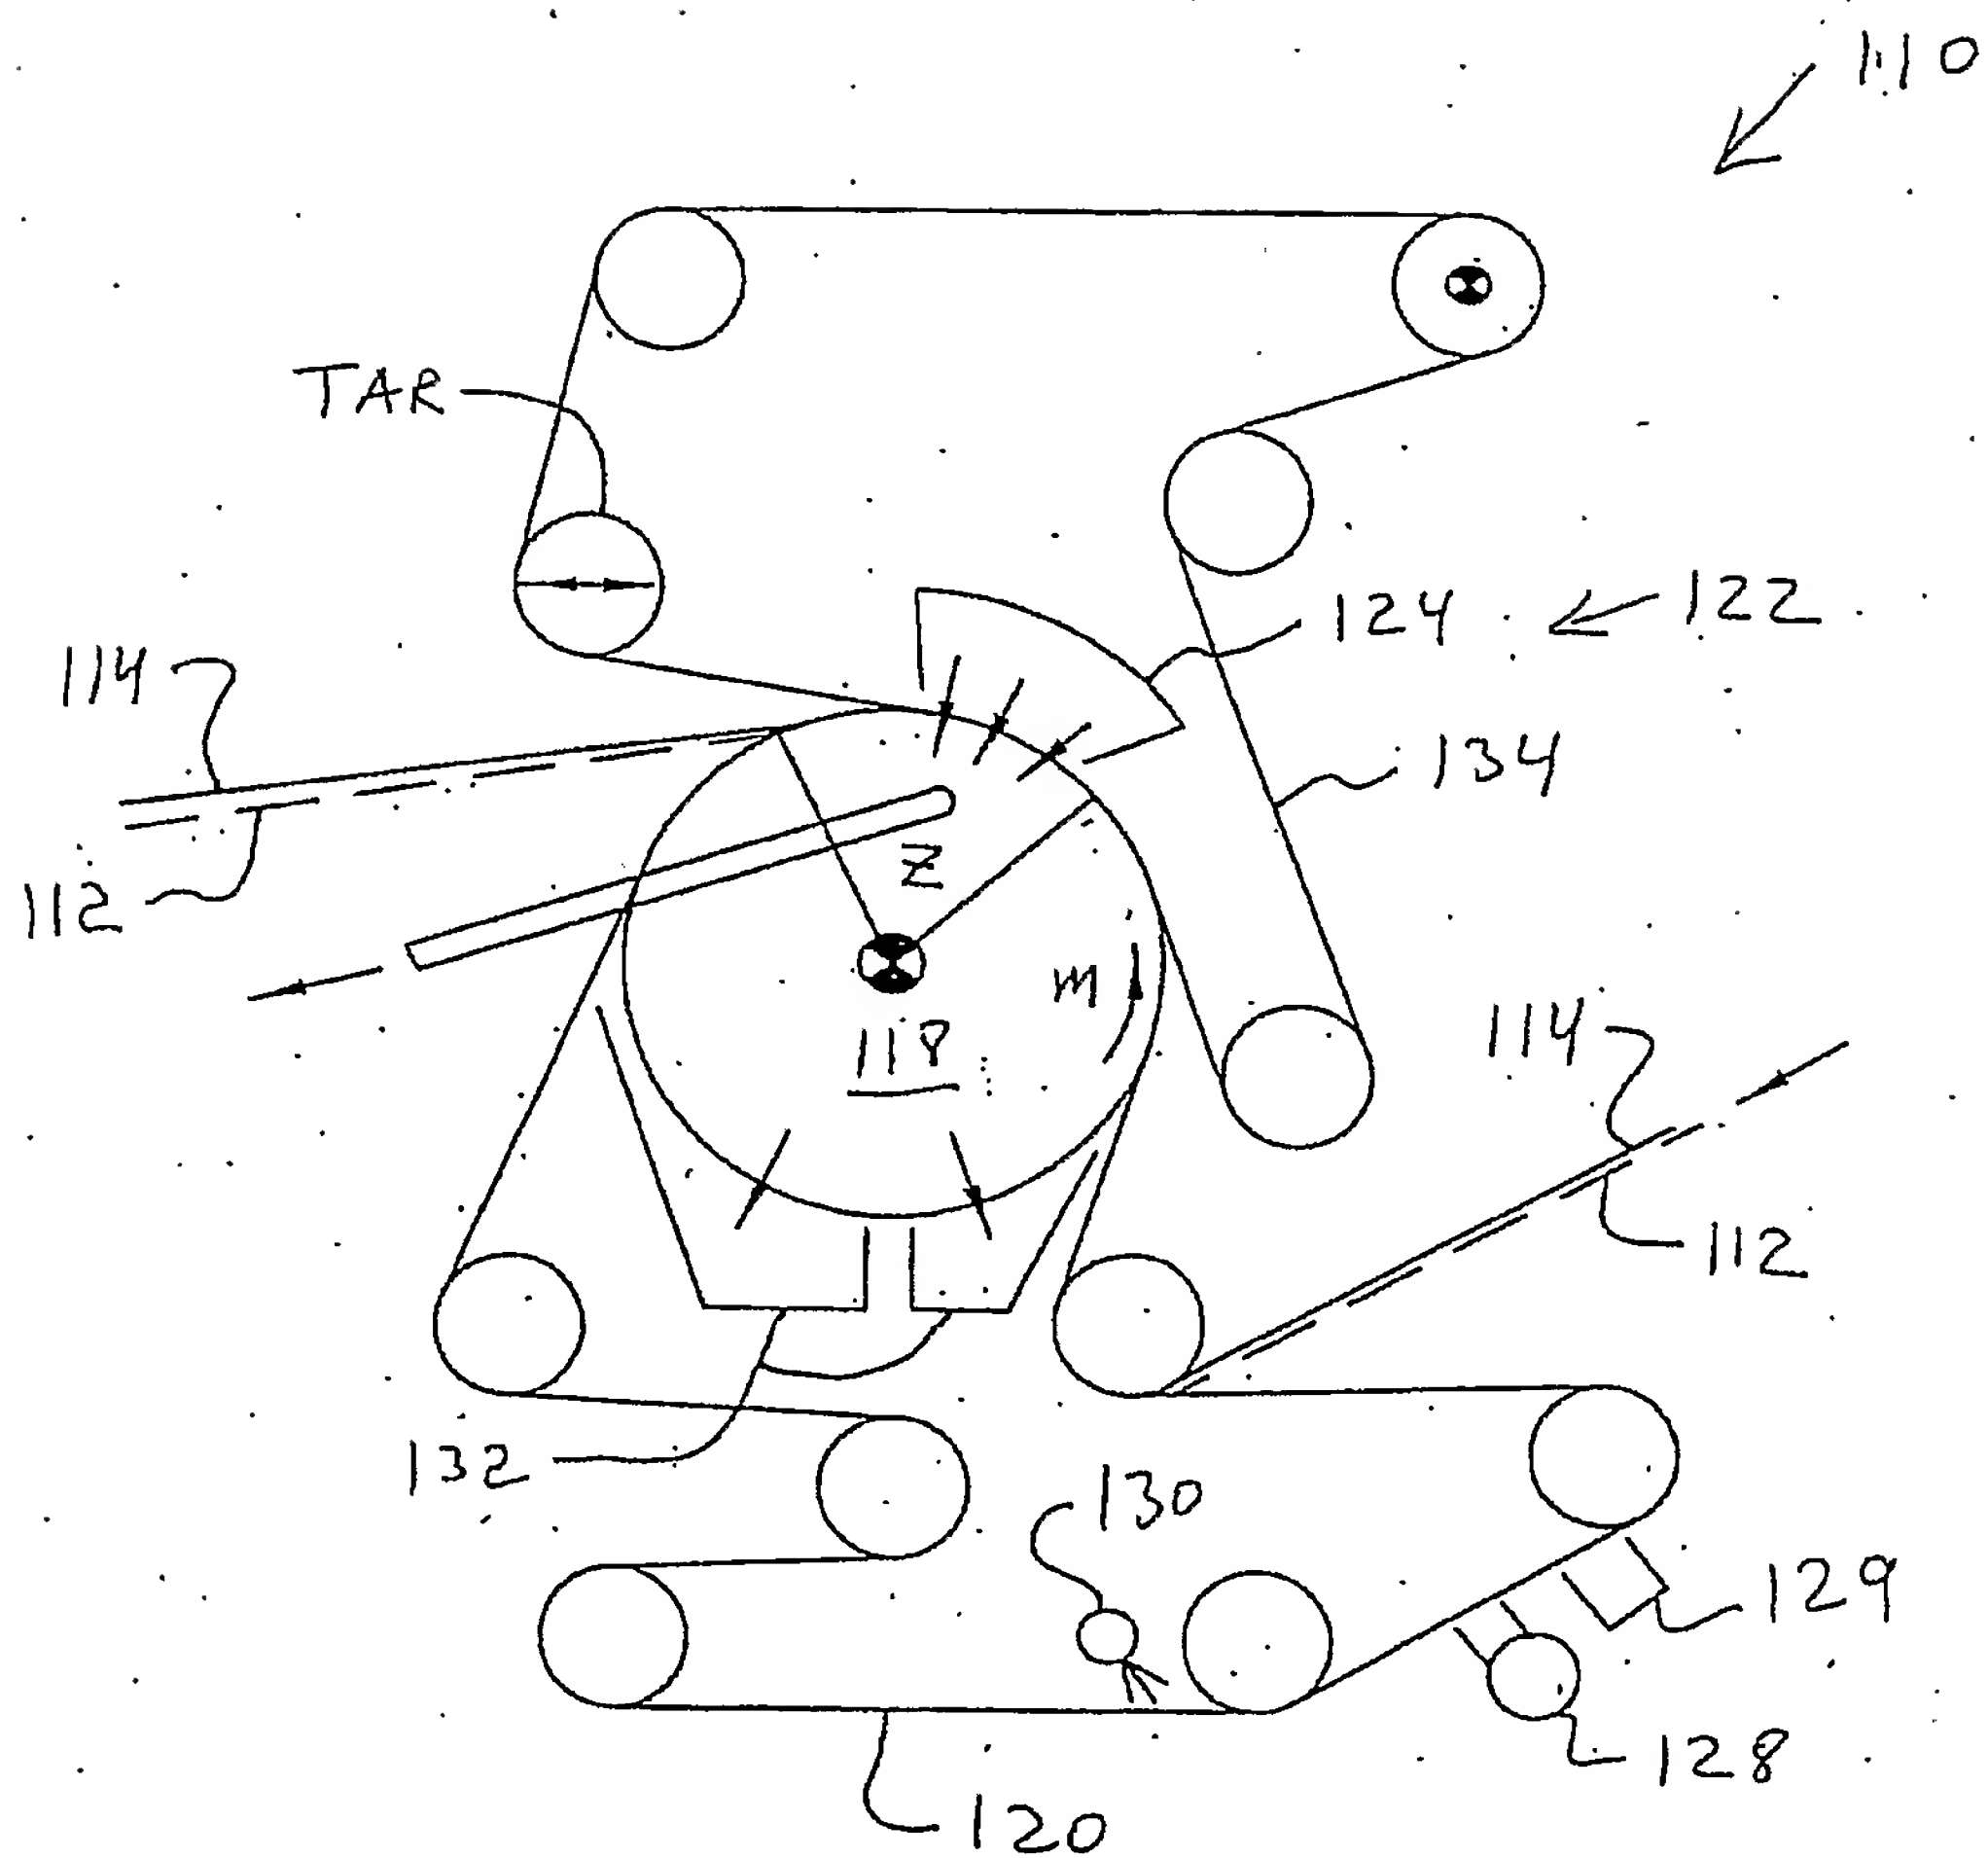


Fig. 12

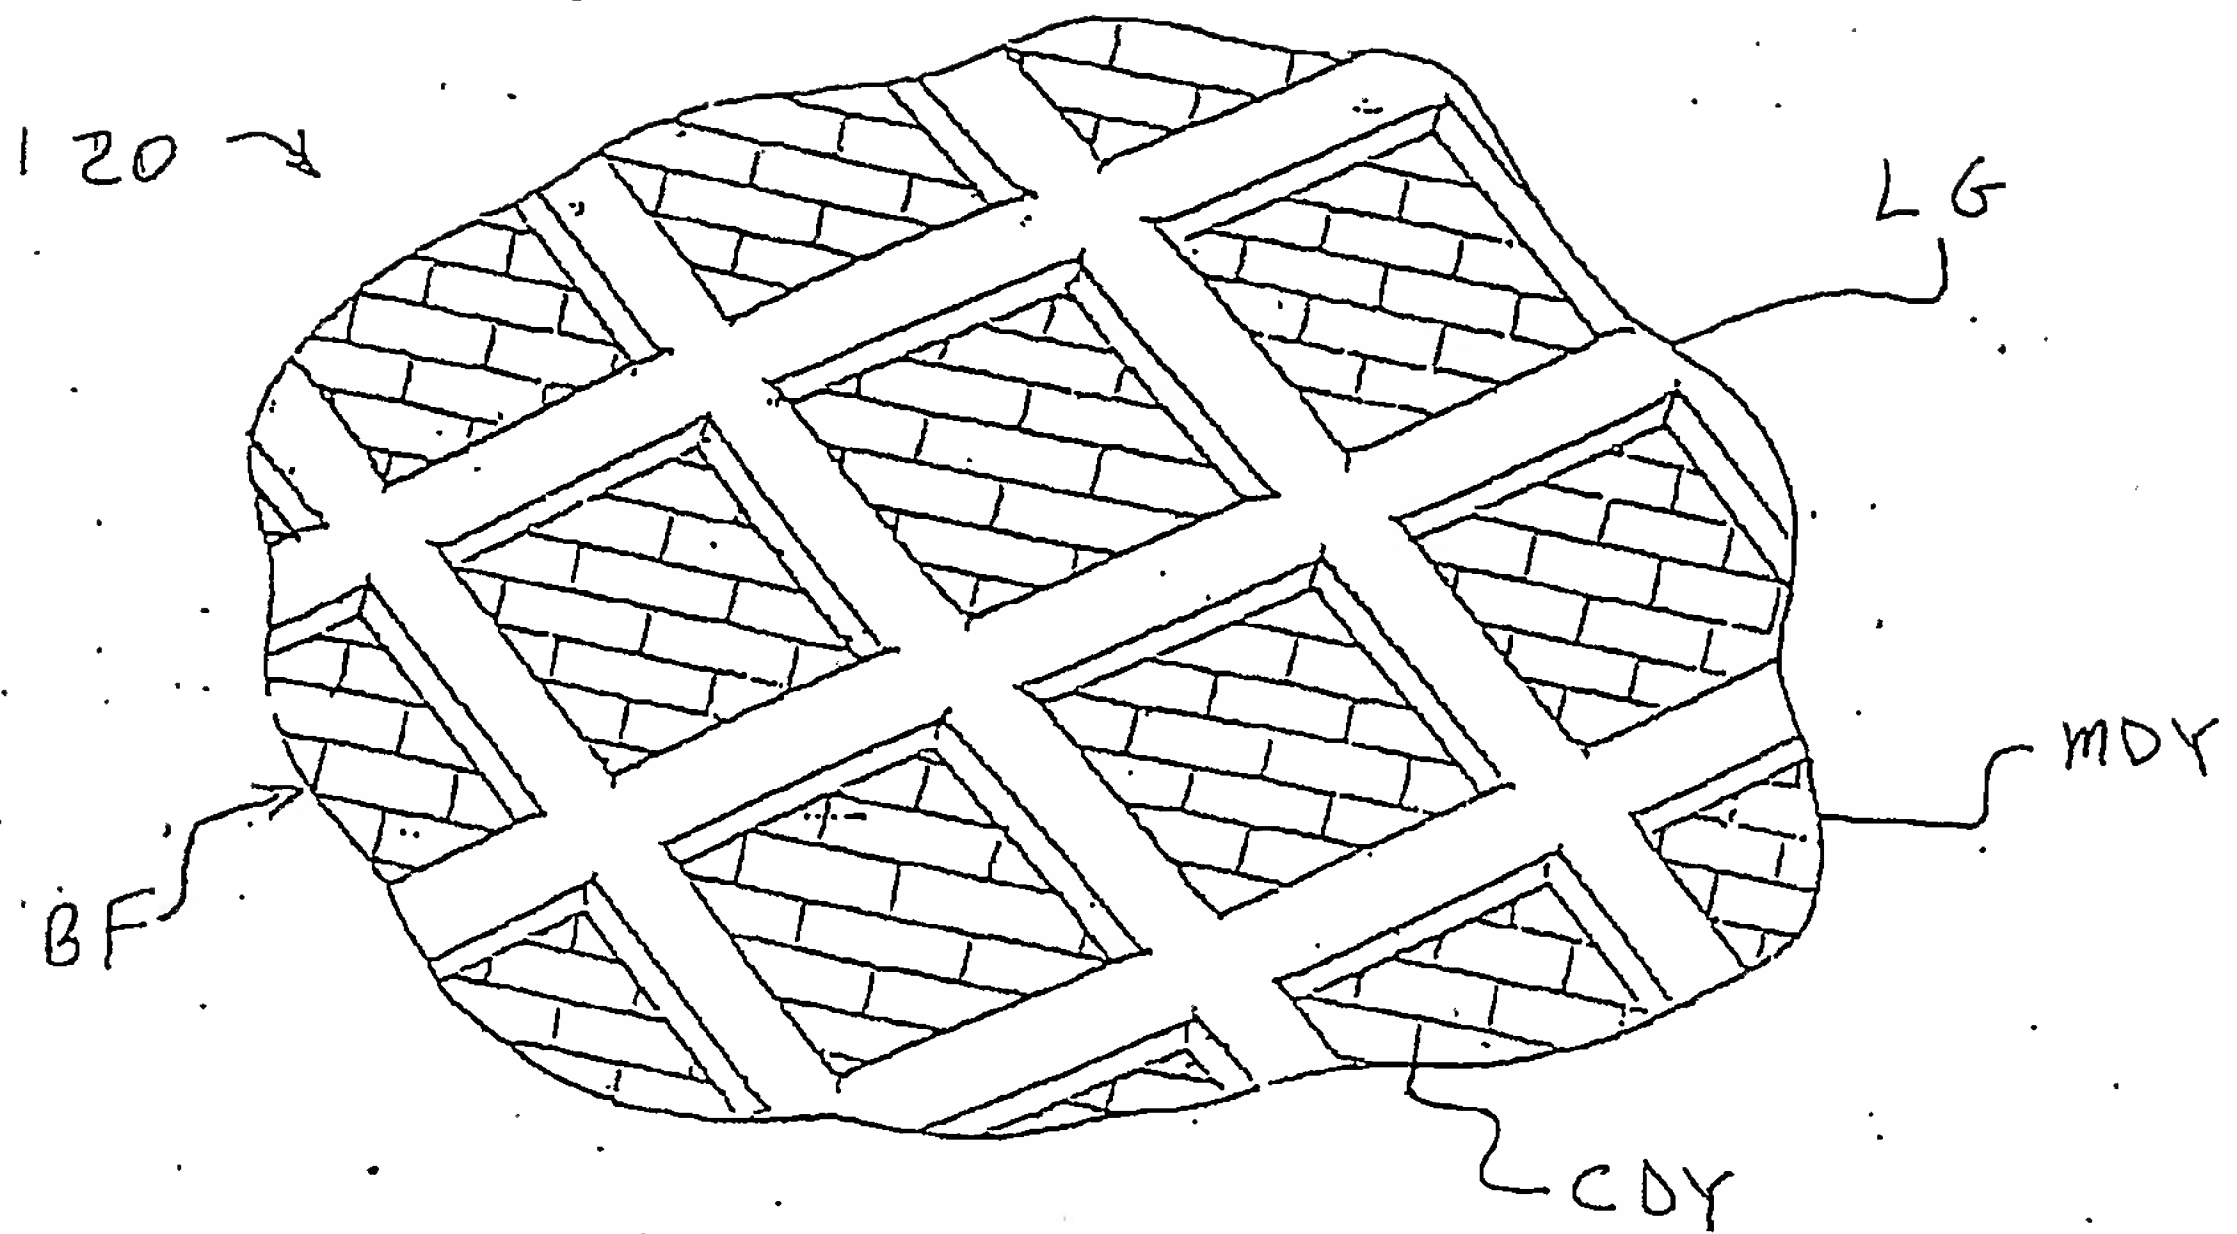


FIG. 13

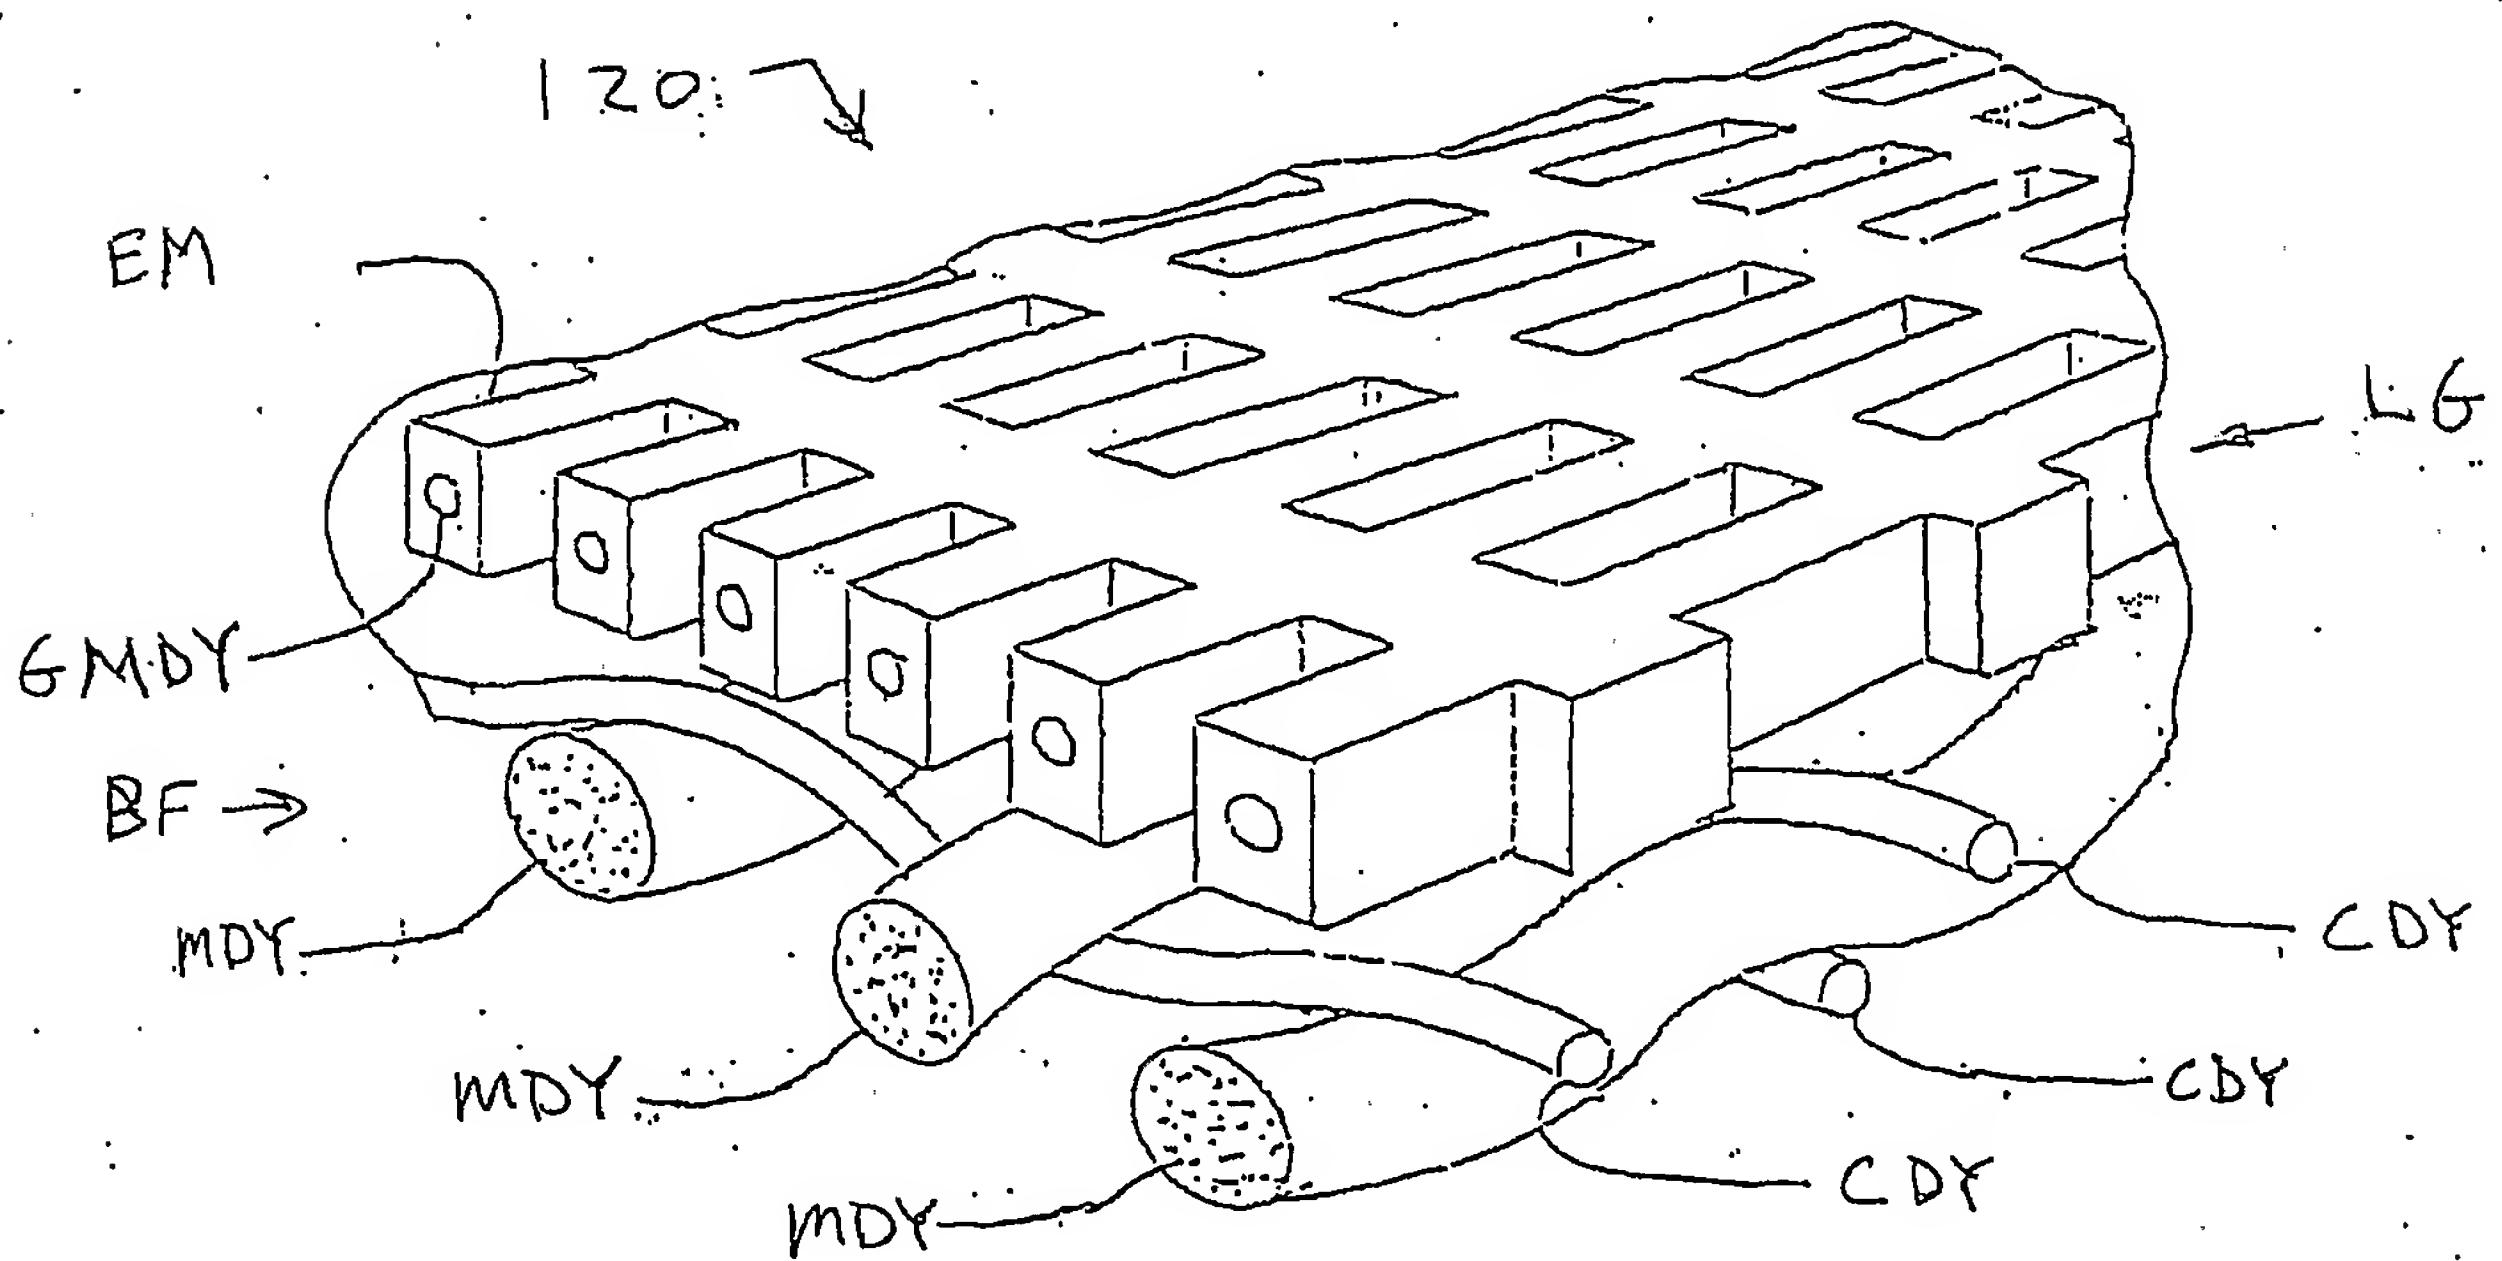


FIG. 14

Fig. 15

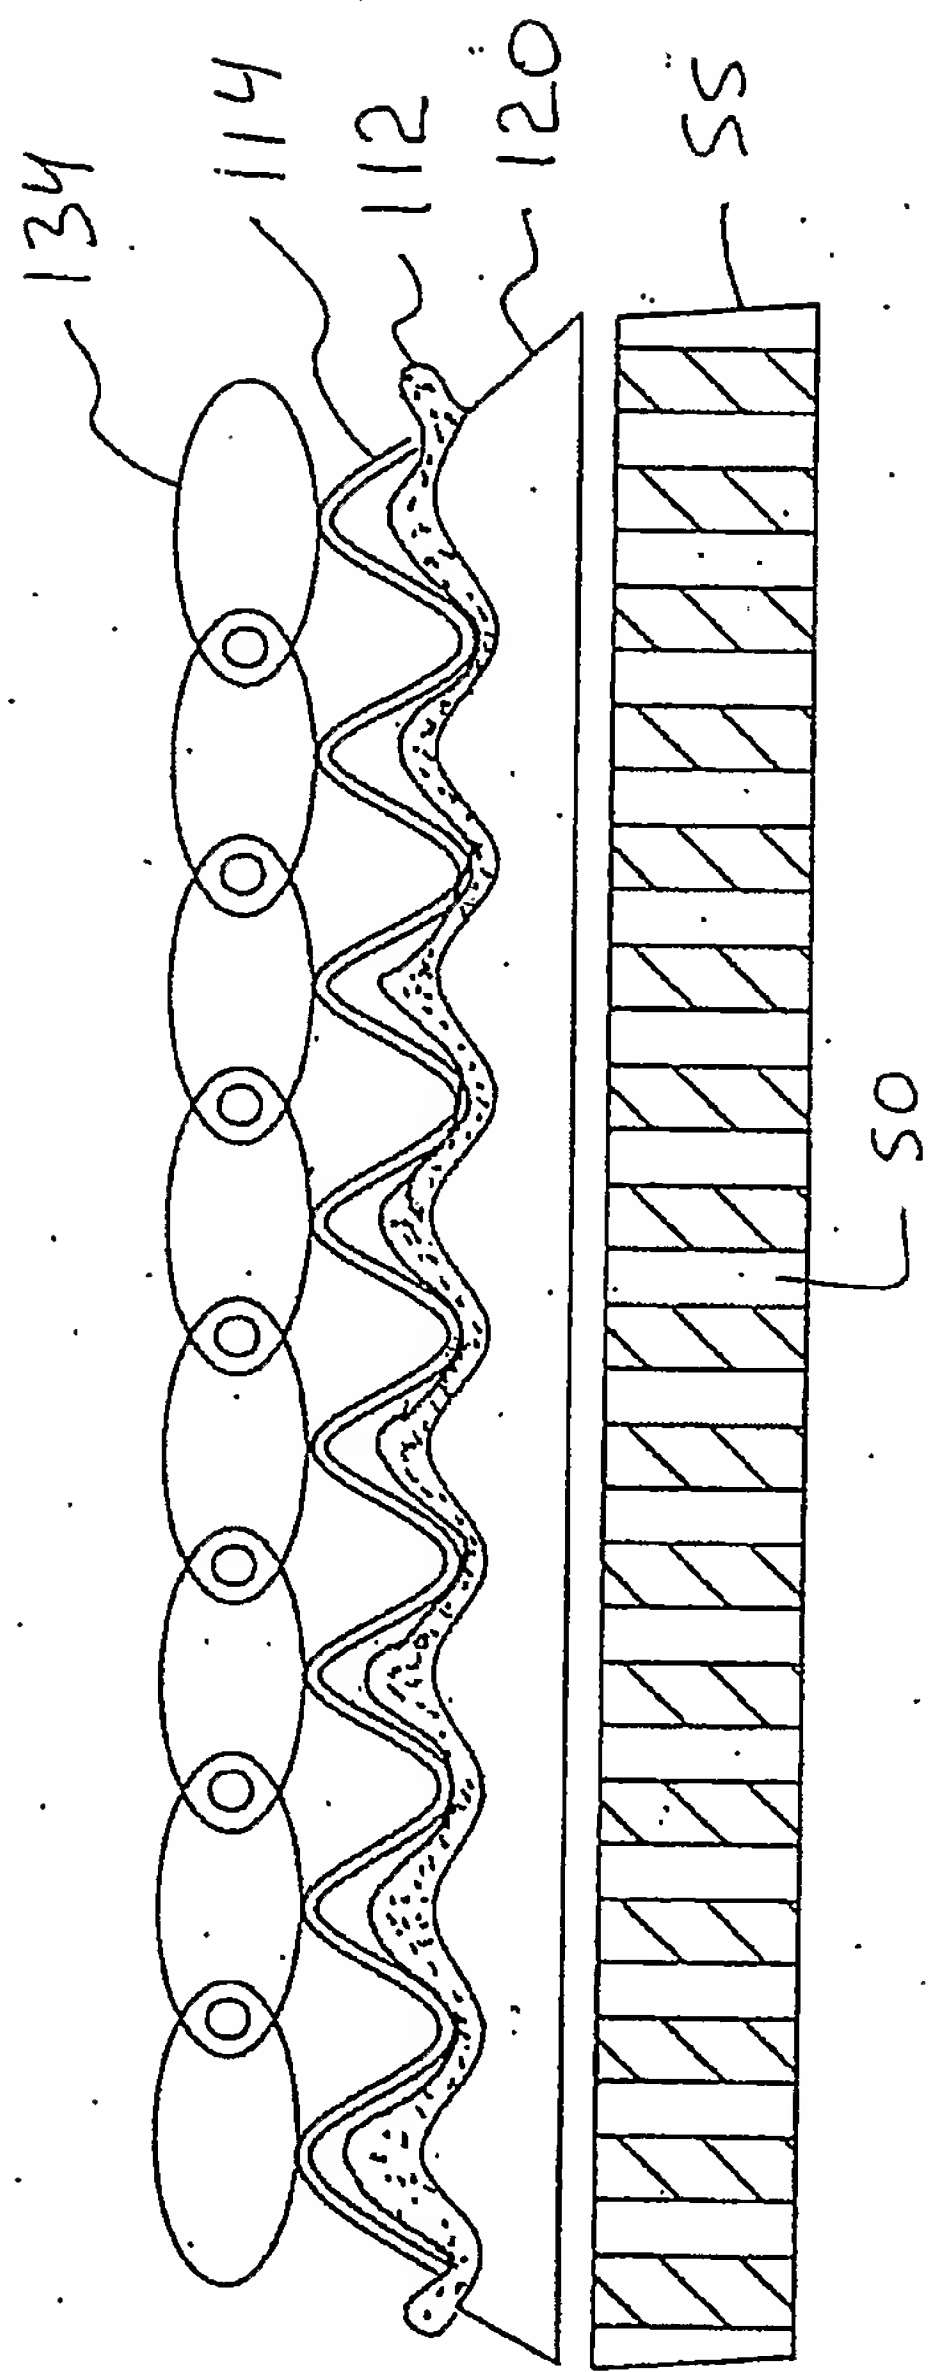


Fig. 16

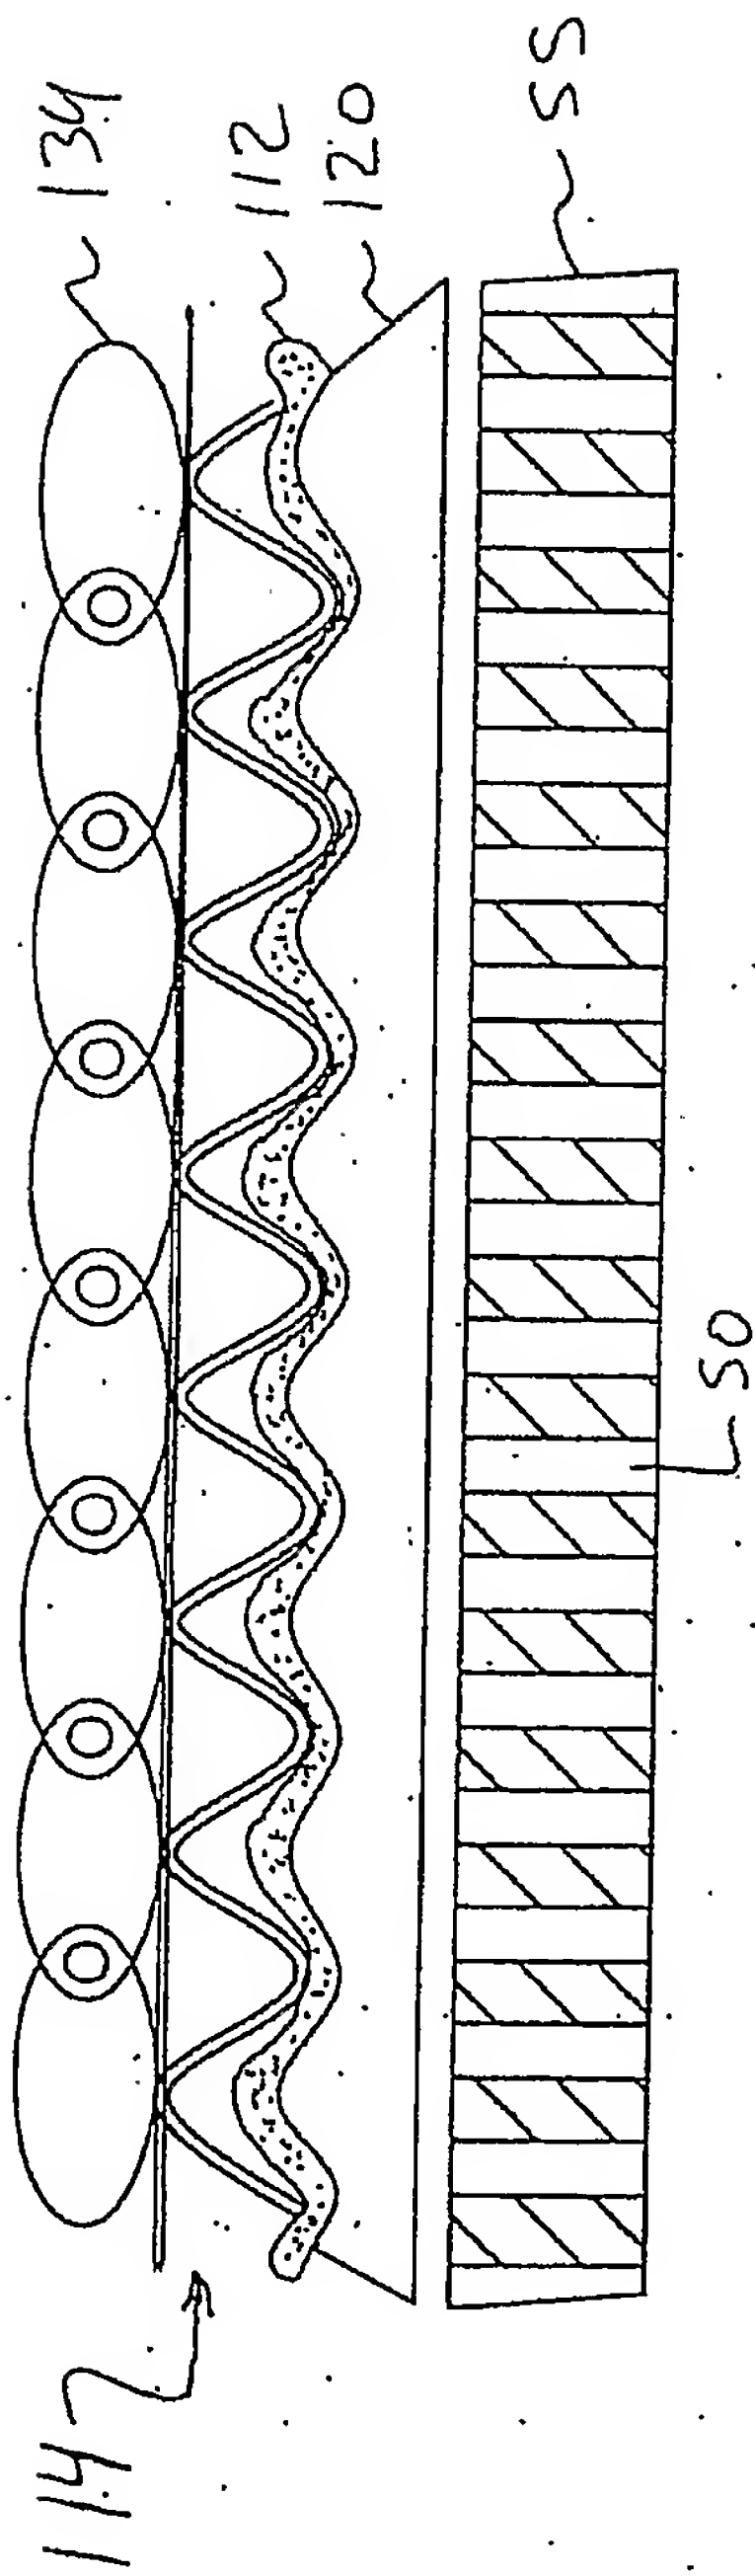


Fig. 17

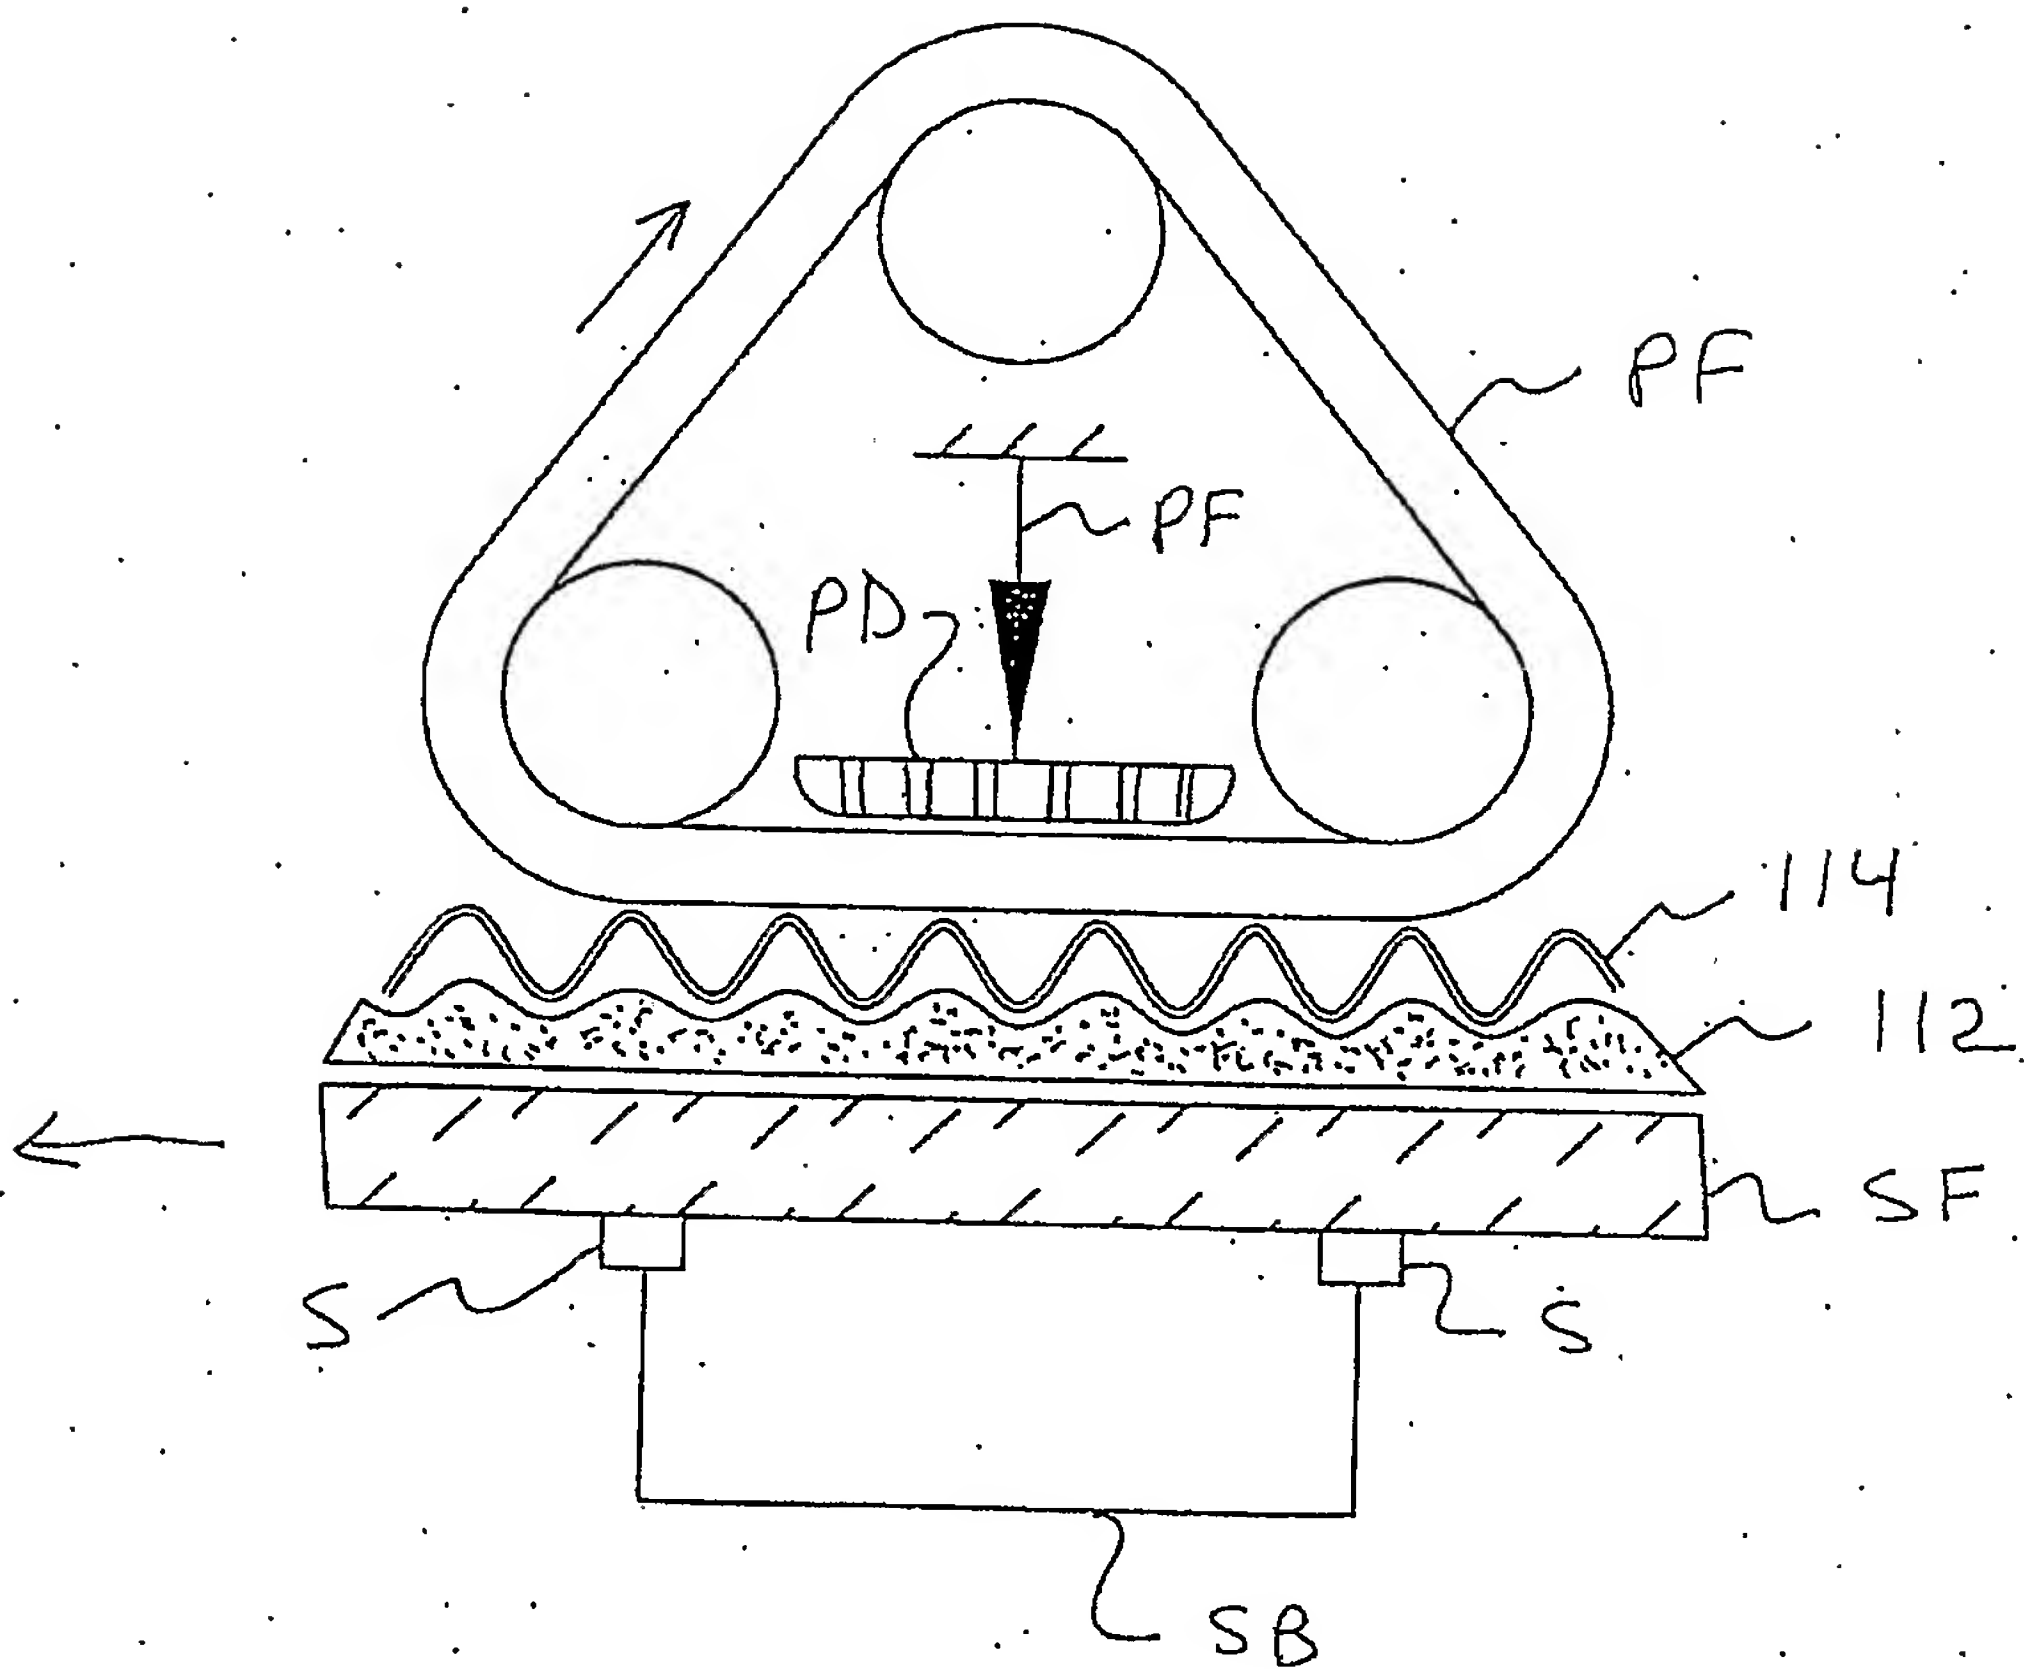


Fig. 18

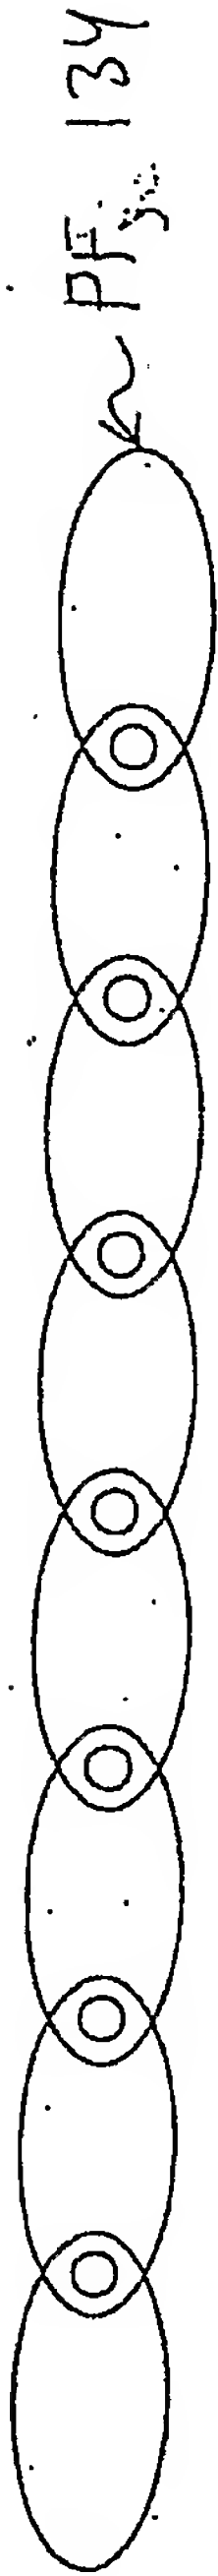


Fig. 19

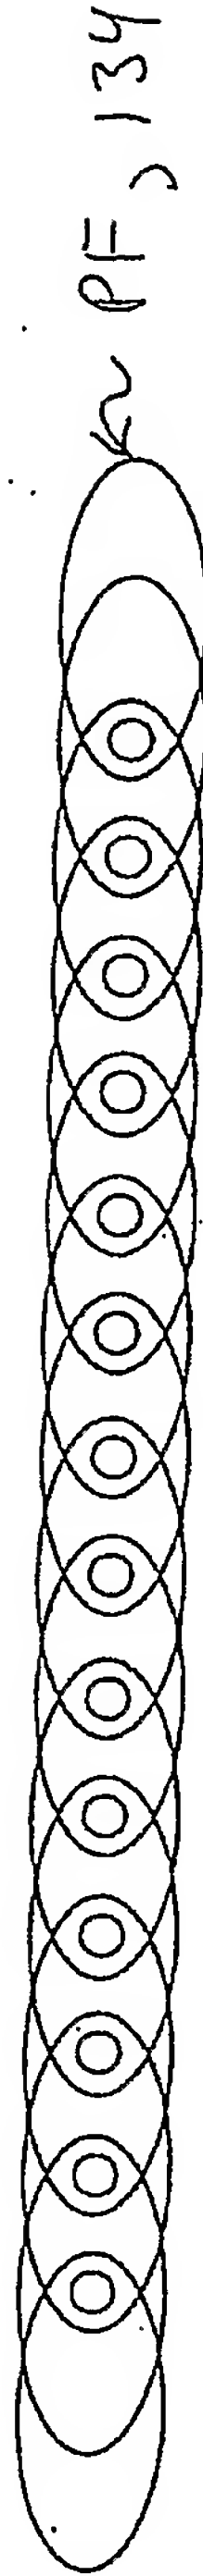


Fig. 20

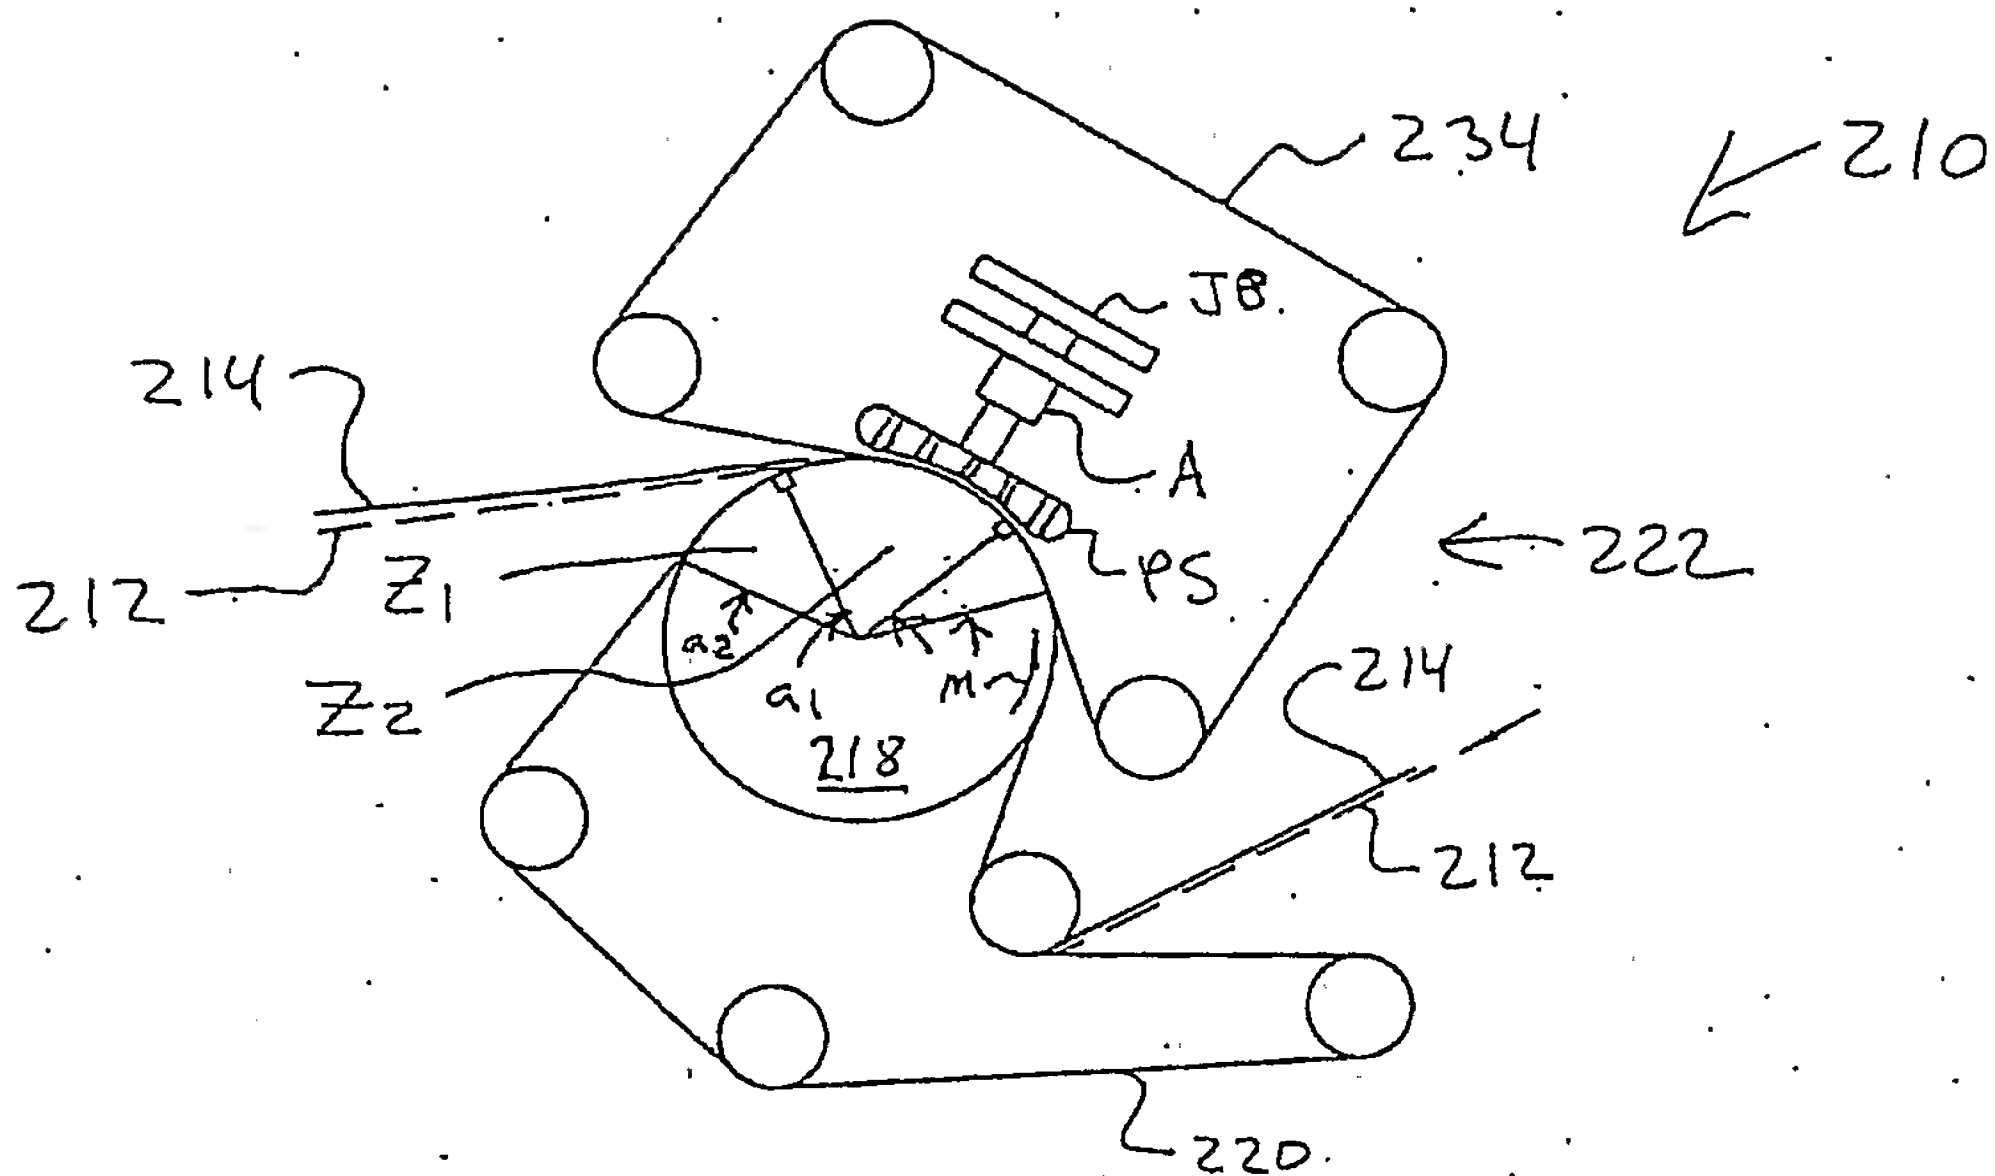


Fig. 21

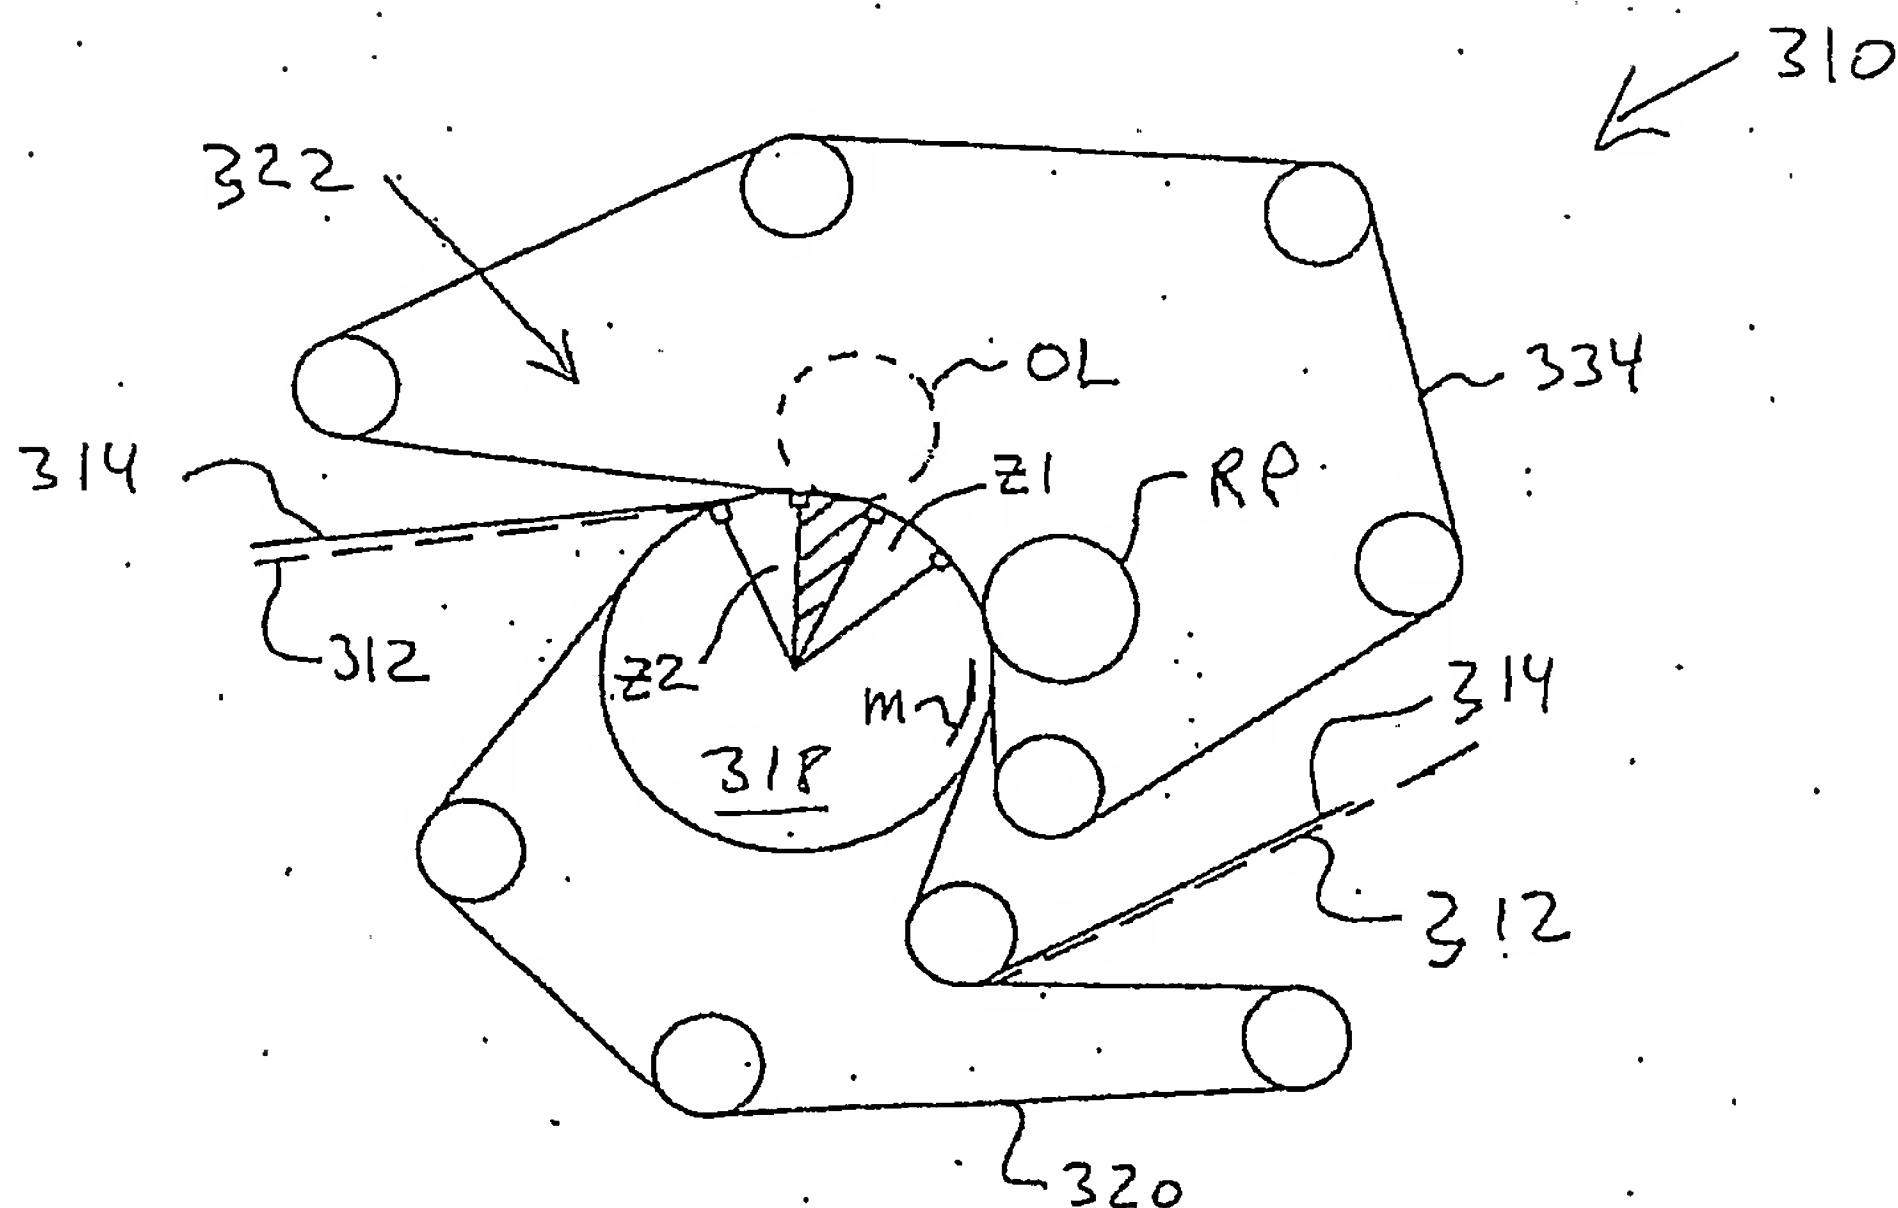


Fig. 22a

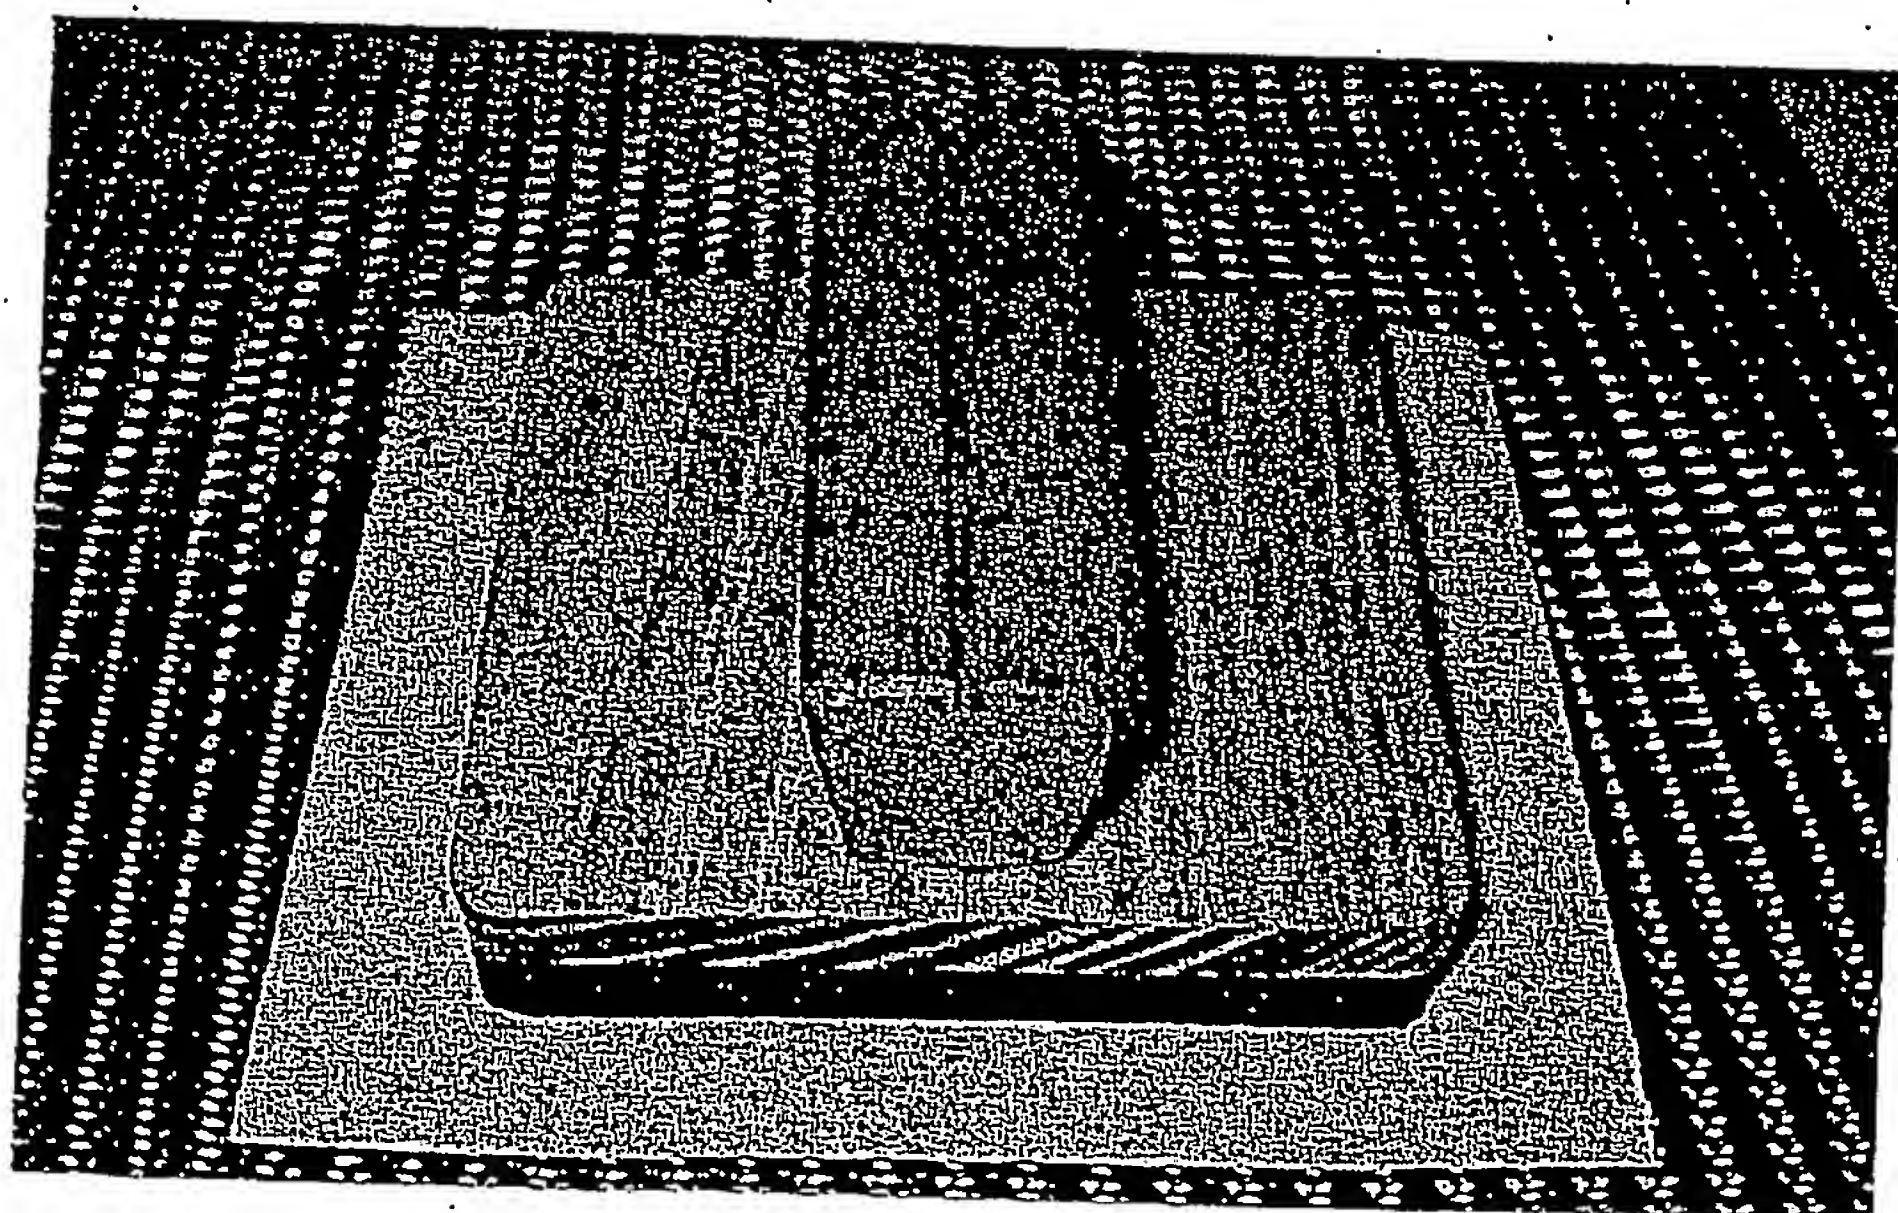
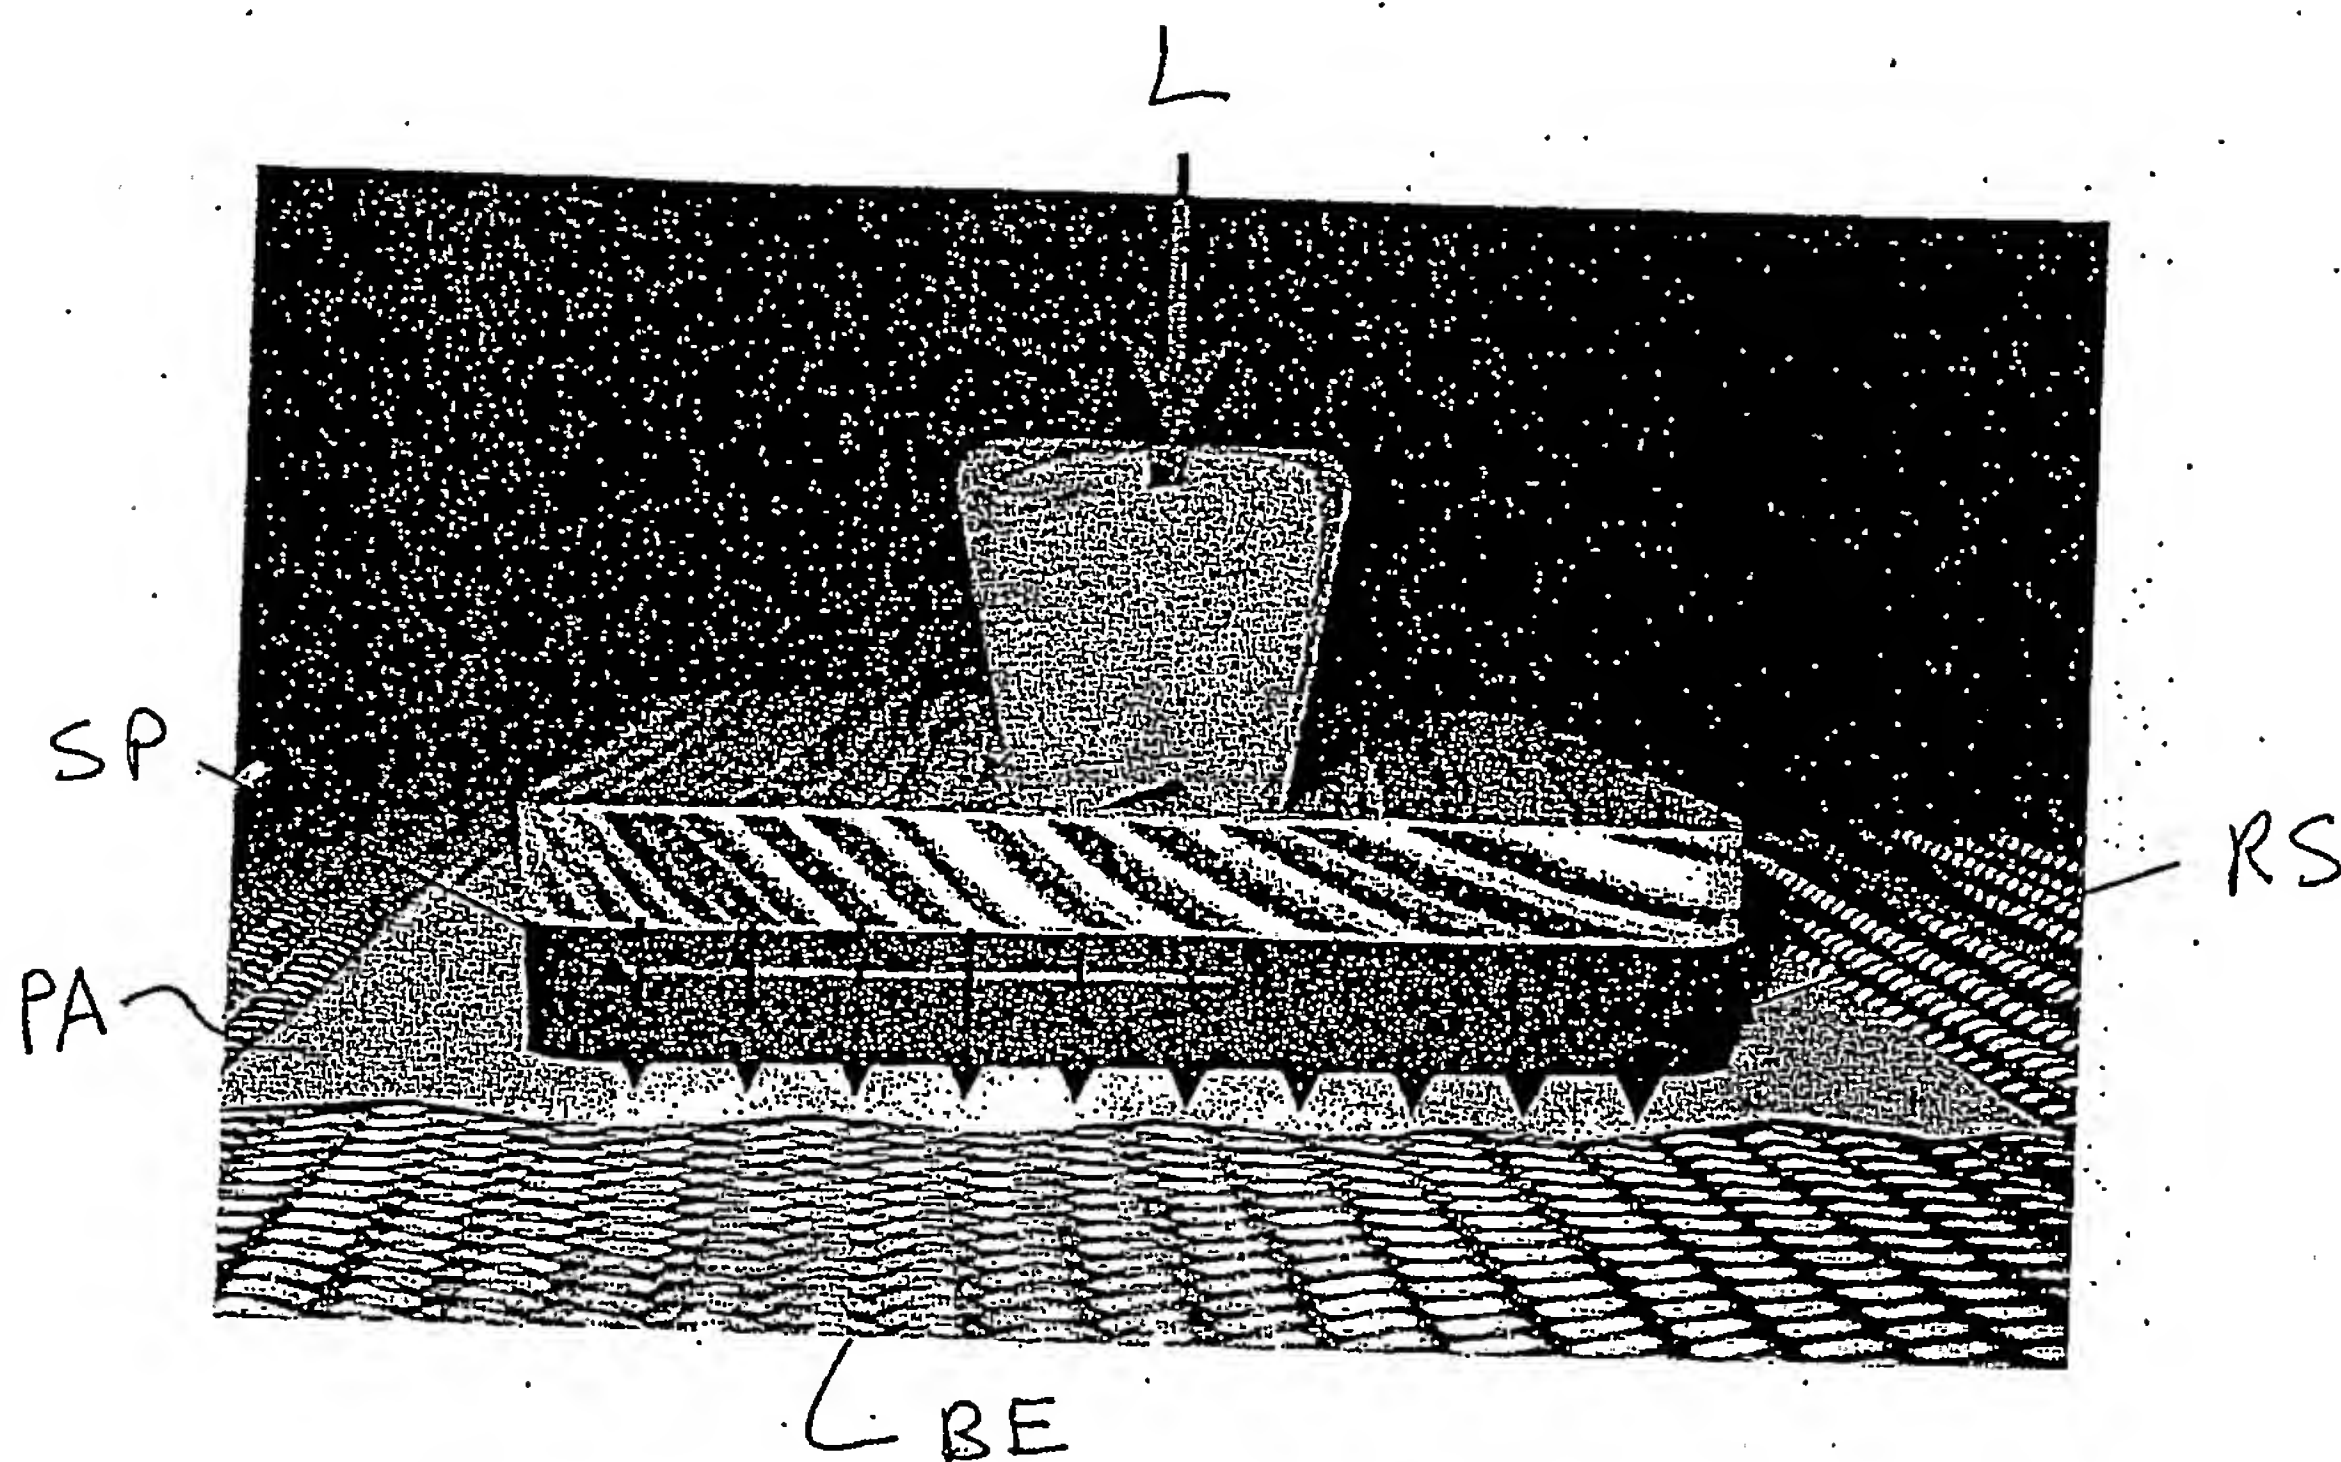


Fig. 22b

BEST AVAILABLE COPY

Fig. 23a

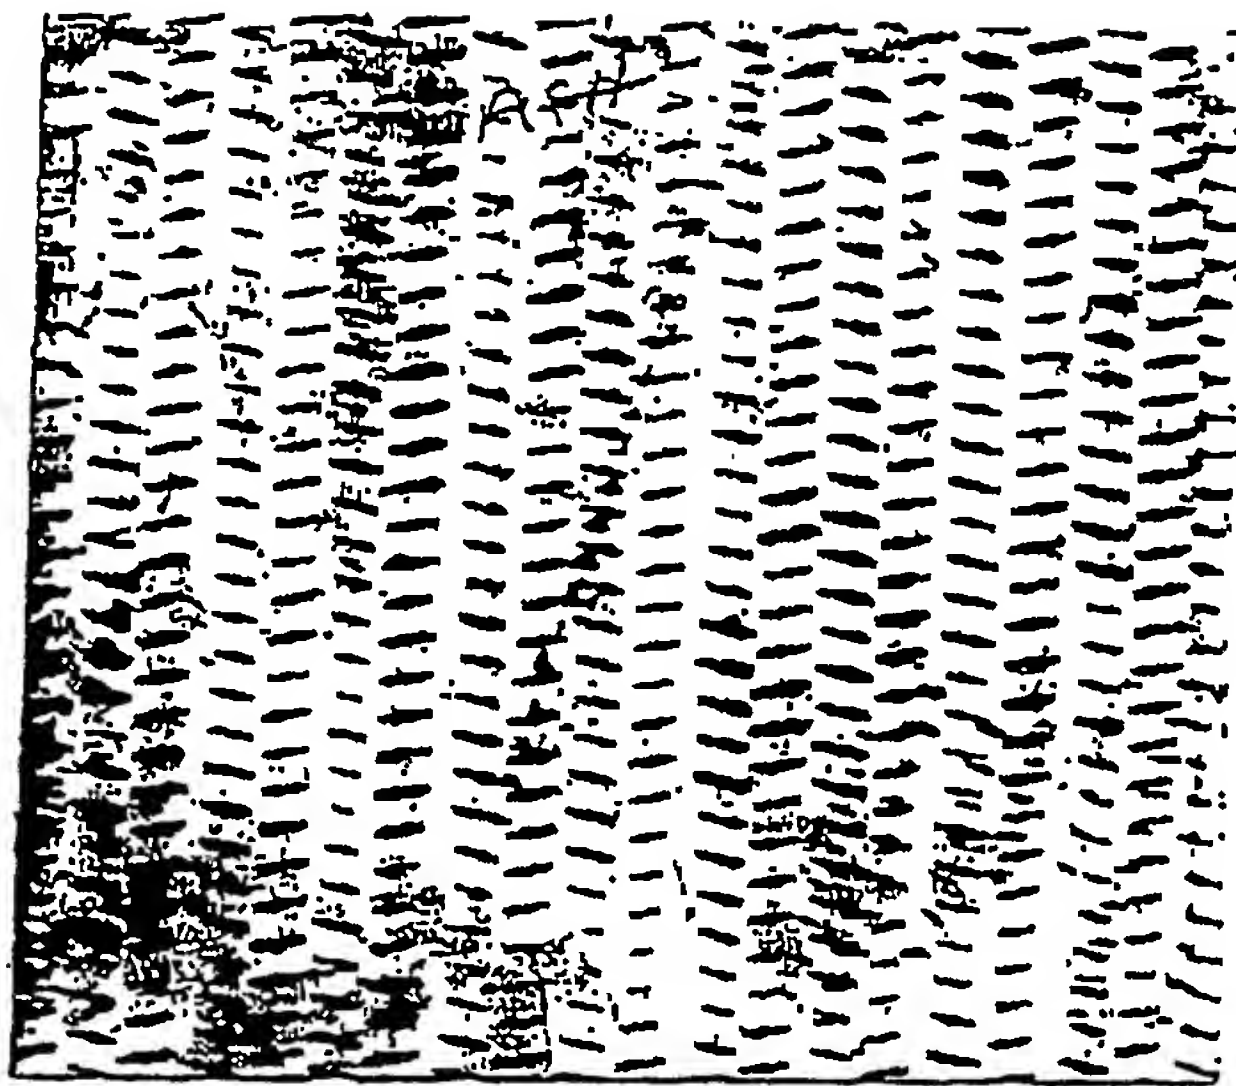


Fig. 23b

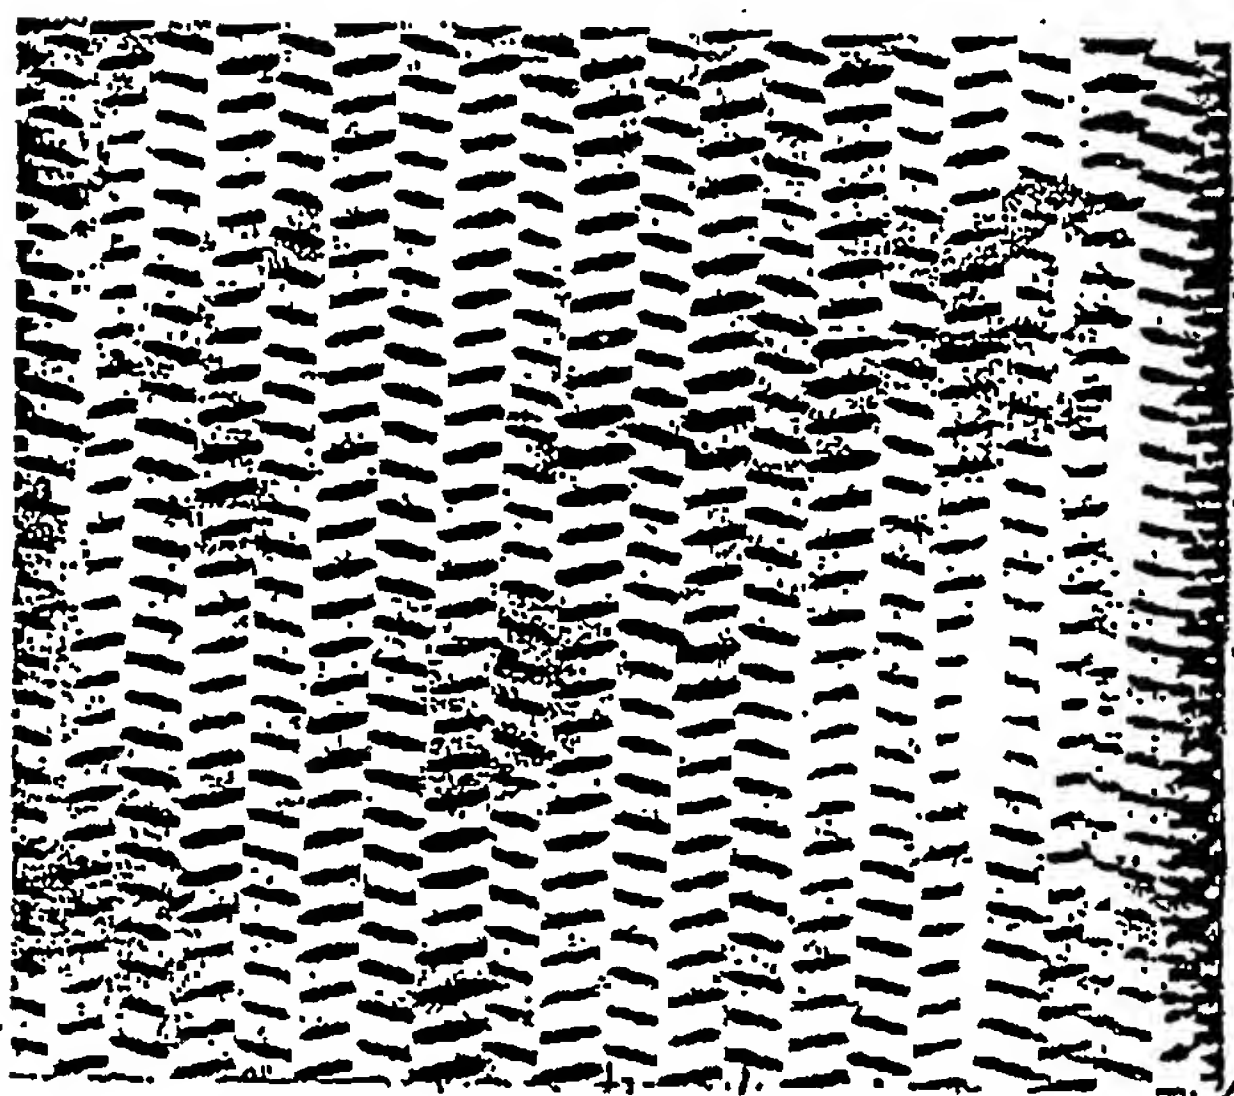


Fig. 23c

